

## Programmable Shunt Regulator


## BL431

### FEATURES

- Programmable output voltage to 36 volts
- Low dynamic output impedance 0.20 typical
- Sink current capability of 1.0 to 100mA
- Equivalent full-range temperature coefficient of 50ppm/°C typical
- Temperature compensated for operation over full rated Operating temperature range
- Low output noise voltage
- Fast turn-on response



Lead-free

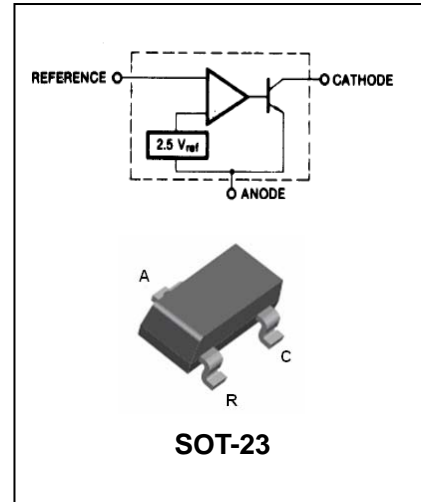

### ORDERING INFORMATION

Type No.	Marking	Package Code
BL431	431	SOT-23

### MAXIMUM RATING @ Ta=25°C unless otherwise specified

Parameter	Symbol	limits	unit
Cathode Voltage	$V_{KA}$	37	V
Cathode current Range(Continuous)	$I_{KA}$	-100 to +150	mA
Reference Input Current Range	$I_{REF}$	0.05 to 10	mA
Power dissipation	$P_D$	350	mW
Thermal Resistance Junction-to-Ambient	$R_{\theta JA}$	350	°C/W
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	155	°C/W
Operating Junction Temperature	$T_J$	150	°C
Operating temperature Range	$T_{OPR}$	-25 to + 105	°C
Storage temperature Range	$T_{STG}$	-65 to +150	°C

### Recommended Operating Conditions

Parameter	symbol	Min	Typ	Max	Unit
Cathode Voltage	$V_{KA}$	$V_{REF}$	-	36	V
Cathode Current	$I_{KA}$	1.0	-	100	mA



**Programmable Shunt Regulator**

**BL431**

**ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified**

Parameter	symbol	conditions	Min.	Typ.	Max.	unit
Reference Input voltage	$V_{REF}$	$V_{KA}=V_{REF}, I_{KA}=10mA$	2.44	2.5	2.55	V
Deviation of Reference Input Voltage Over-Temperature	$\Delta V_{REF}/\Delta T$	$V_{KA}=V_{REF}, I_{KA}=10mA,$ $T_{MIN} \leq T_A \leq T_{MAX}$		4.5	17	mV
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage	$\Delta V_{REF}/\Delta V_{KA}$	$I_{KA}=10mA$ $\Delta V_{KA}=10V-V_{REF}$		-10	-2.7	mV/V
		$\Delta V_{KA}=36V-10V$		-0.5	-2.0	
Reverse Input current	$I_{REF}$	$I_{KA}=10mA,$ $R_1=10K\Omega, R_2=\infty$		1.5	4	$\mu A$
Deviation of Reference Input Current Over Full Temperature Range	$\Delta I_{REF}/\Delta T$	$I_{KA}=10mA,$ $R_1=10K\Omega, R_2=\infty$ $T_A=Full\ Range$		0.4	1.2	$\mu A$
Minimum Cathode Current for Regulation	$I_{KA(MIN)}$	$V_{KA}=V_{REF}$		0.45	1.0	mA
Off-Stage Cathode Current	$I_{KA(OFF)}$	$V_{KA}=36V,$ $V_{REF}=0$		0.05	1.0	$\mu A$
Dynamic Impedance	$Z_{ZA}$	$V_{KA}=V_{REF},$ $I_{KA}=1\ to\ 100mA$ $f \geq 1.0KHz$		0.15	0.5	$\Omega$

• $T_{MIN}=-25^{\circ}C, T_{MAX}=+85^{\circ}C$

**CLASSIFICATION OF  $V_{ref}$**

Rank	0.5%	1%	2%
Range	2.488-2.512	2.475-2.525	2.450-2.550

Programmable Shunt Regulator

BL431

TYPICAL CHARACTERISTICS @  $T_a=25^\circ\text{C}$  unless otherwise specified

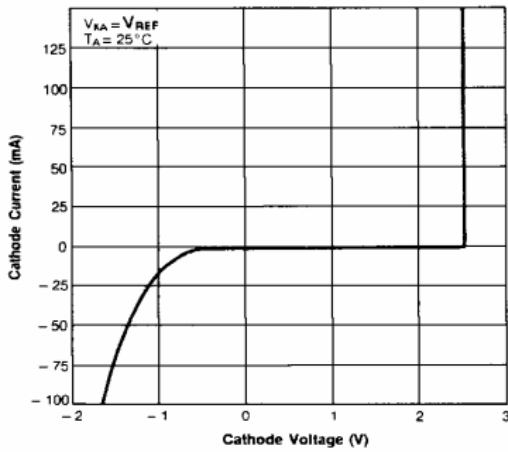


Figure 1. Cathode Current vs. Cathode Voltage

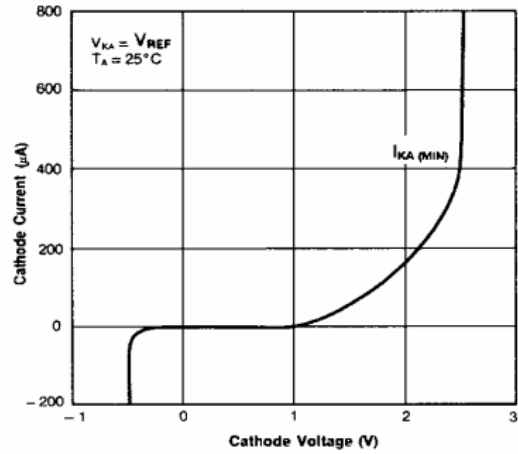


Figure 2. Cathode Current vs. Cathode Voltage

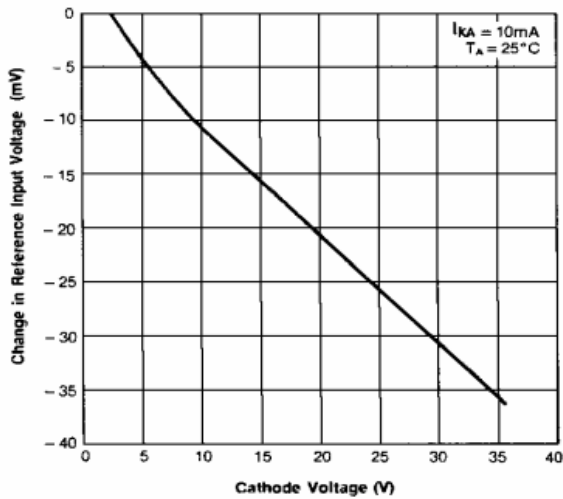


Figure 3. Change In Reference Input Voltage vs. Cathode Voltage

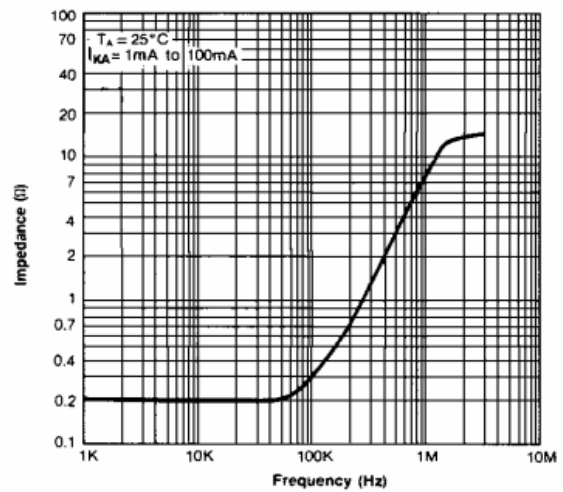


Figure 4. Dynamic Impedance Frequency

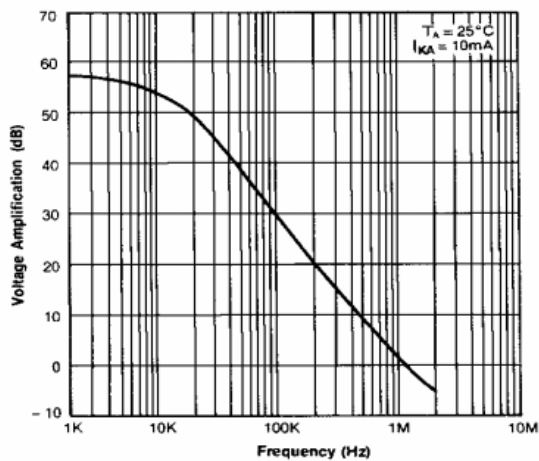


Figure 5. Small Signal Voltage Amplification vs. Frequency

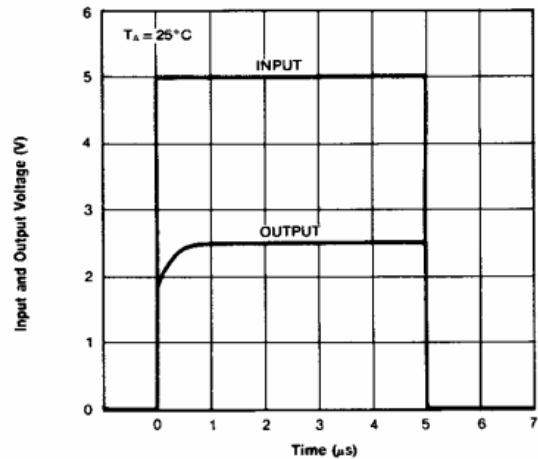


Figure 6. Pulse Response

Programmable Shunt Regulator

BL431

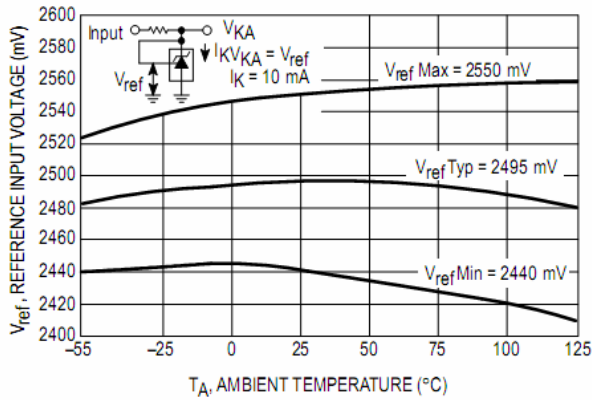


Figure 7. Reference Input Voltage versus Ambient Temperature

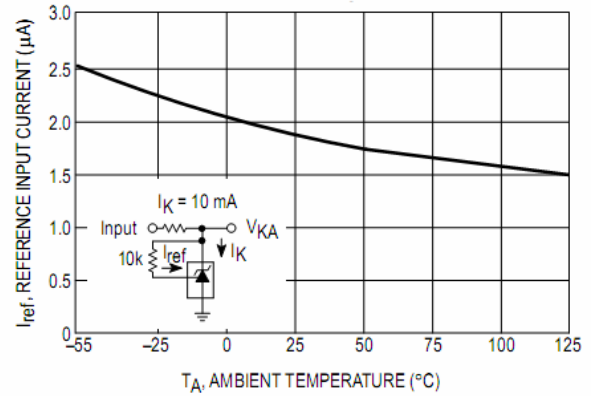


Figure 8. Reference Input Current versus Ambient Temperature

PACKAGE OUTLINE

Plastic surface mounted package

SOT-23

SOT-23		
Dim	Min	Max
A	2.70	3.10
B	1.10	1.50
C	1.0 Typical	
D	0.4 Typical	
E	0.35	0.48
G	1.80	2.00
H	0.02	0.1
J	0.1 Typical	
K	2.20	2.60
All Dimensions in mm		




---

**Programmable Shunt Regulator**

**BL431**

---

**SOLDERING FOOTPRINT**

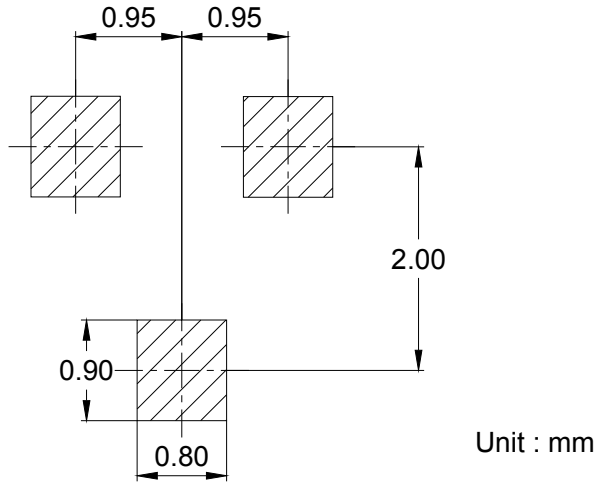

**PACKAGE INFORMATION**

Device	Package	Shipping
BL431	SOT-23	3000/Tape&Reel