




GENISCO FILTER™
always on.™

Facility Power Line Filters

GFP78221 Mid Performance Series Capacitive Input
100 dB @ 100 KHz ~ 18 GHz

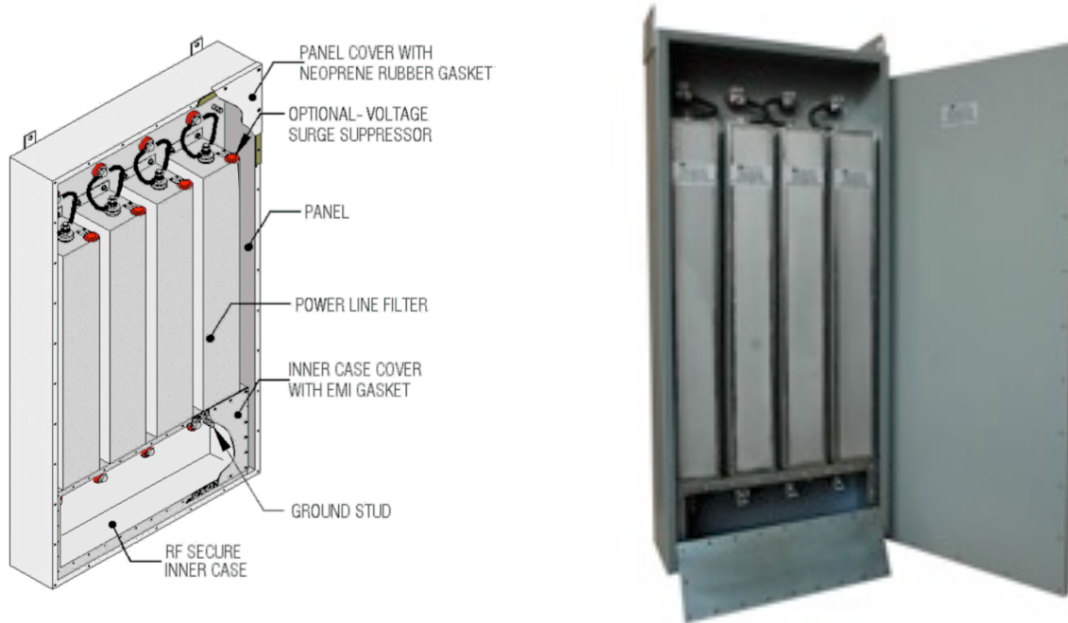

PANEL OPTIONS			
GFP78201	-4x	075	-00
GFP78221		400	
PANEL MODEL	NUMBER OF FILTERS *	Current Rating (AMPS)	Add-Ons (Opt)***
	-2x		00-Standard
	-3x		01-Legs
	-4x		02-Lights
			03-MOVs
			04-Legs+ Lights
			05-Legs+ MOV
			06-Lights+MOV
			07-Legs+ Light+MOV
* One filter per conductive path			
*** Crate for shipping included in all options			

Product Summary

EMI/RFI Facility Power Line Filters are used to block unwanted signals and remove interference from entering or exiting through the power lines. Our Mid Performance Filters are specified to 60 dB @ 14 kHz.- 100Db @ 100KhZ.

SUBJECT TO CHANGE WITHOUT NOTICE
03/28/2016



GENISCO FILTER™
always on.™


680 W. Bradley St., El Cajon, CA 92020 • 619-440-4900 • 855-GENISCO • info@genisco.com • www.genisco.com



GENISCO FILTER™
always on.™

FUNCTIONAL CHARACTERISTICS

- Voltage Ratings:
 - 24-1,000 VDC
 - 120/208 VAC (50/60 Hz)
 - 277/480 VAC (50/60 Hz)
- Voltage Drop:
 - 2% maximum at full rated unity power factor load.
- Harmonic Distortion:
 - 4% maximum at full rated unity power factor load
- Temperature Rating:
 - MIL-PRF-15733
- Current Overload:
 - 140% maximum current rating
- RF Radiation:
 - Greater than 100 dB isolation
- Dielectric With-Standing Voltage:
 - 2,200 VDC (prior to installation of discharge resistors)
- Insulation Resistance:
 - MIL-PRF-15733 (prior to installation of discharge resistors)
- Insertion loss:
 - 60 dB @ 14 KHz
 - 100 dB @ 100 KHz to 18 GHz
 - 50/50 Ohm System

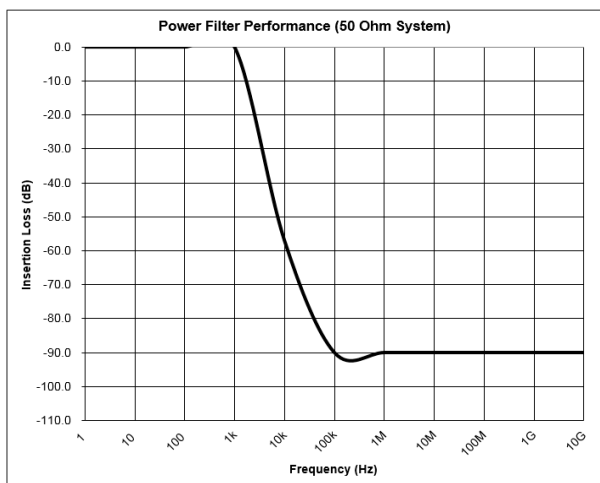

*Representation of Insertion Loss Specifications

SPECIAL FEATURES

Filters

- Low Pass filter circuits ~ passive components which includes inductors, capacitors, resistors and optional transient suppression devices
- Manufactured and tested per applicable portions of MIL-PRF-15733
- Filter cases 16 gage, CRS, plated or painted finish
- Sealed with welded and soldered seams for shielding effectiveness
- Discharge resistors incorporated to eliminate potential shock hazard

Enclosure

- Modified NEMA type fabricated panel of not less than 14 gauge cold rolled steel painted Gray (Std. Paint Color)
- RF tight inner area secured with RF gasket for 100 dB minimum shielding effectiveness, 14 kHz to 18 GHz
- Pre-wired standoffs and cable lugs
- Lifting ears included
- Front cover access to filters and terminal standoffs
- Floor or wall mount options

Applicable Specifications

- Military Specifications
 - MIL-PRF-15733 General
- Military Test Methods
 - MIL-STD-202 Component Parts
 - MIL-STD-220 Insertion Loss
 - MIL-STD-285 Shielding Effectiveness
- NFPA 70/2011 National Electrical Code Standards

Available Options

- EMP and surge Suppressors
- HUB and Fitting Installation
- Legs (8.0 Inch Standard)
- Custom Paint Colors (Enclosure)
- RF Secure Penetration Accessories
- Voltage Indicator Lights
- 400 Hz Filters (lower insertion loss performance)

SUBJECT TO CHANGE WITHOUT NOTICE
03/28/2016



GENISCO FILTER™
always on.™

680 W. Bradley St., El Cajon, CA 92020 • 619-440-4900 • 855-GENISCO • info@genisco.com • www.genisco.com

