

### FEATURES

- > Tungsten contacts for better load switching performance\*\*
- > Vacuum dielectric allows for make and/or break load switching
- > Mounting options in any axis
- > Threaded HV connections means easy installation





### PRODUCT SPECIFICATIONS

Contact & Relay Ratings	Units	G22
<b>Contact Form</b>		X
<b>Contact Arrangement</b>		SPST-NO
Contact Material (moveable/stationary)		molybdenum /tungsten
Dielectric		Vacuum
<b>Voltage, Test Max., Contacts &amp; to Base (15 µA Leakage Max., dc or 60Hz)</b>	kV Peak	28
<b>Voltage, Operating Max., Contacts &amp; to Base (15 µA Leakage Max.) dc or 60 Hz</b>	kV Peak	25
<b>Current, Load Switching</b>		Contact Factory**
<b>Current, Continuous Carry Max</b> dc or 60 Hz	Amps	65
<b>Coil Hi-Pot (V RMS, 60 Hz)</b>	V	500
<b>Capacitance</b>		
Across Open Contacts	pF	2.5
Contacts to Ground	pF	2.5
<b>Resistance, Contact Max @ 1A, 28 Vdc</b>	ohms	0.005
<b>Operate Time</b>	ms	18
<b>Release Time</b>	ms	10
<b>Life, Mechanical</b>	cycles	2 million
<b>Weight, Nominal</b>	g (oz)	342 (12)
<b>Vibration, Operating, Sine (55-500 Hz Peak)</b>	G's	10
<b>Shock, Operating, 1/2 Sine11ms (Peak)</b>	G's	30
<b>Temperature Ambient Operating</b>	°C	-55 to +125

### COIL RATINGS

Nominal, Volts dc	12	26.5	115
Pick-up, Volts dc, Max.	8	16	80
Drop-Out, Volts dc	.5 - 5	1 - 10	5 - 50
Coil Resistance (Ohms ±10%)	24	120	2000

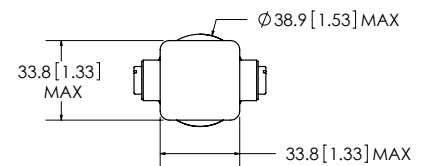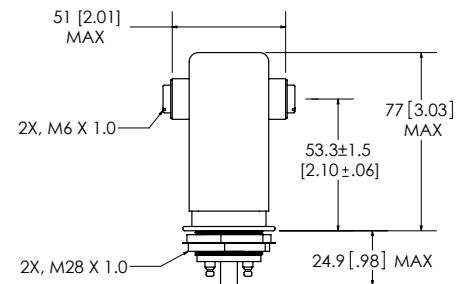

### PART NUMBER SYSTEM

G22	W	P	
<b>High Voltage/Power Terminal Connections</b>	W= Screw		
<b>Mounting</b>		P = Through Panel	
<b>Coil Voltage*</b>			Blank = 26.5 Vdc -12Vdc = 12 Vdc -115Vdc = 115 Vdc

\* Order the relay with the coil voltage in the part number as shown above. The coil voltage will appear on the coil plate near the coil terminals rather than in the P/N on the relay.

\*\* Consult factory for load switching applications