


ER32L65

SPECIFICATION: (23±2°C)

| | |
|------------------------------------|---------------|
| Nominal capacity (1mA~2V): | 1.0Ah |
| Rated voltage: | 3.6V |
| Max constant current of discharge: | 10mA |
| Max discharge current(pulse): | 20mA |
| Weight: | 17g |
| Operating temperature range: | -55°C ~ +85°C |

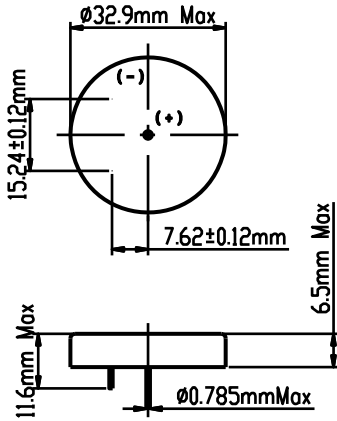

S: Standard termination

Notes:

Dimension: mm

Special terminations can be made as requested.

T: Solder tabs

P: Axial pins


Important Notes

Do not short or charge the battery.


Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.

Do not heat/use the battery beyond the permitted temperature range.


Discharge characteristics at 23±2°C

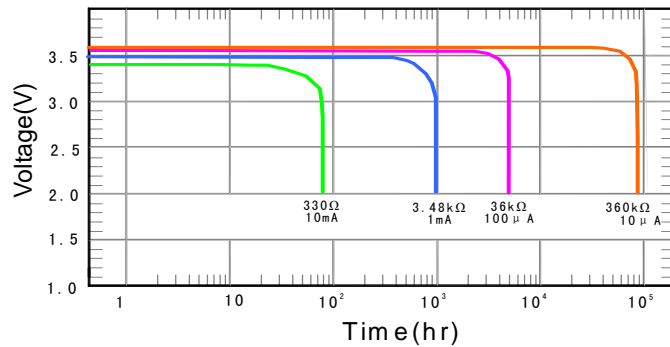

Capacity VS. Current

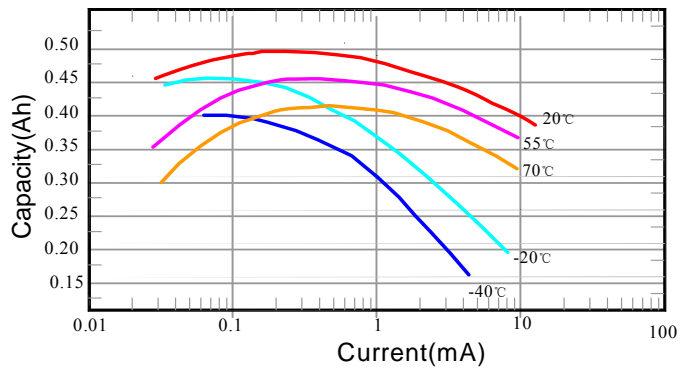

Voltage VS. Temperature

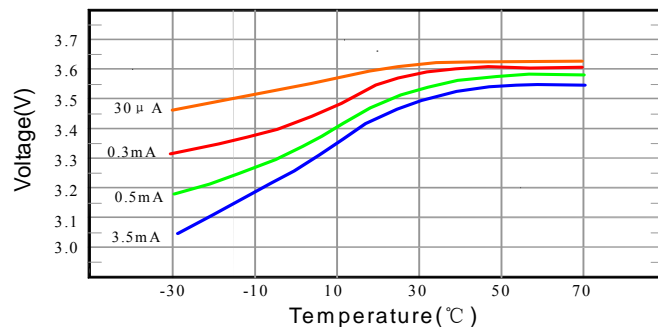

Guangzhou Markyn Battery Co., Ltd.

YiJia Industrial Park, Shixin Road 1100, Nancun Town, Panyu District, Guangzhou P.R.C

Tel:(86)20 — 8456 0852 Fax:(86)20 — 3476 7936

Email:sale s@gmbattery.com

 U.L. Component Recognition MH 45782