

## Intel® Atom™ Processor Dual PMC Controller



### APPLICATIONS

The VP A45/01x is a PC-compatible low power, high functionality, 6U VME board supporting the 1.6 GHz Intel® Atom™ processor N270. It utilizes the Mobile Intel® 945GSE Express chipset to support 2 Gbytes of DDR2-533 SDRAM. This single slot board features 1 PMC/XMC site and 1 PMC site, an on-board CompactFlash™ site and a range of I/O including four Ethernet interfaces. The VP A45/01x is a commercial air-cooled board, suitable for a range of environments

within industrial control, transportation, security, telemetry, scientific and medical applications. Options to operate in temperatures ranging from -40°C to +85°C are available. A ruggedized conduction-cooled version is planned and a ruggedized air-cooled version is available. To simplify the board's integration many industry standard operating systems are supported.

### HIGHLIGHTS

- 1.6 GHz Intel® Atom™ processor N270:
  - 512 Kbytes L2 cache
  - Intel® Hyper-Threading Technology supports 2 execution threads
- 2 Gbytes of DDR2-533 SDRAM
- Dual SATA150 drive interfaces
- Option for an on-board SATA 2.5-inch mass storage device
- EIDE interface for an on-board CompactFlash® socket
- 1 x PMC/XMC and 1 x PMC module interfaces:
  - 1 x 32-bit, 33 MHz PCI PMC site
  - 1 x 32/64-bit, 33/66 MHz PCI/PCI-X™ PMC site
  - 1 x XMC module interface (x1 PCI Express™)
  - Expansion carrier for 2 more PMC/XMC sites
- Keyboard, mouse and DVI-D graphics interfaces via P2
- 2 x serial channels and 3 x USB 2.0 interfaces
- Watchdog and long duration timer
- 4 Mbytes of BIOS Flash EPROM
- 4 x Ethernet interfaces:
  - 1 x 10/100Mbps and 1 x 10/100/1000Mbps Ethernet channels via front panel RJ45 connectors
  - 2 x 10/100/1000Mbps Ethernet channels via P0
- VME64 interface supporting A32/A24/A16/D64/D32/D16/D8(E0), MBLT64
- Extended temperature versions available:
  - -25°C to +70°C (E-Series)
  - -40°C to +85°C (K-Series, includes humidity sealant)
- Ruggedized air-cooled version (RA-Series) available:
  - -40°C to +75°C, conformally coated
  - see separate VP A45/01x-RA datasheet
- Ruggedized conduction-cooled version (RC-Series) planned:
  - conduction-cooled to ANSI/VITA 30.1-2002
  - -40°C to +85°C, conformally coated
  - see separate VP A45/01x-RC datasheet
- Support for Linux®, Windows® XP, Windows® XP Embedded, QNX® and VxWorks®

## Central Processor

- 1.6 GHz Intel® Atom™ processor N270:-
  - 512 Kbytes of secondary (L2) on-die cache
  - 533 MHz Front Side Bus
  - Intel Hyper-Threading Technology supporting 2 execution threads
- utilizes Mobile Intel® 945GSE Express chipset:-
  - uses Intel® ICH7M I/O Hub

## SDRAM

- 2 Gbytes soldered DDR2-533 SDRAM
- accessible from processor or VME bus

## Mass Storage Interfaces

- 1 x EIDE interface supports on-board CompactFlash™ socket
- 2 x Serial ATA150 interfaces:-
  - transfer rate up to 150 Mbytes/s
  - accessed via P2 connector
  - one channel switchable to on-board SATA 2.5-inch mass storage device
- option for USB Flash drive module

## Ethernet Interfaces


- 1 x 10/100Mbps interface via front panel:-
  - provided by Intel ICH7M
- 1 x 10/100/1000Mbps interface via front panel:-
  - implemented by Intel® 82574 LAN Controller via x1 PCI Express® link
- 2 x 10/100/1000 Mbps interfaces via P0:-
  - implemented by 2 x Intel® 82574 LAN Controllers via x1 PCI Express® links

## PMC/XMC Interfaces

- 1 x PMC/XMC site and 1 x PMC site
- PMC site 1 supports:-
  - 32/64-bit, 33/66 MHz PCI/PCI-X
  - 3.3V or 5V signaling
  - XMC interface via x1 PCI Express port
  - I/O via front panel and via P2 (VITA 35 P4V2-64ac pinout)
- PMC site 2 supports:-
  - 32-bit, 33MHz PCI only
  - 3.3V or 5V signaling
  - I/O via front panel and via optional P0
- expansion to optional dual PMC/XMC carrier board:-
  - via x1 PCI Express XMC site

## Serial Interfaces

- 1 x RS232 serial channel accessed via RJ45 connector on front panel:-
  - supporting CTS, RTS, DSR, DTR and DCD
- 1 x RS232/422/485 serial channel accessed via P2:-
  - supporting RI, CTS, RTS, DSR, DTR, DCD and RI
  - 16550 compatible UART

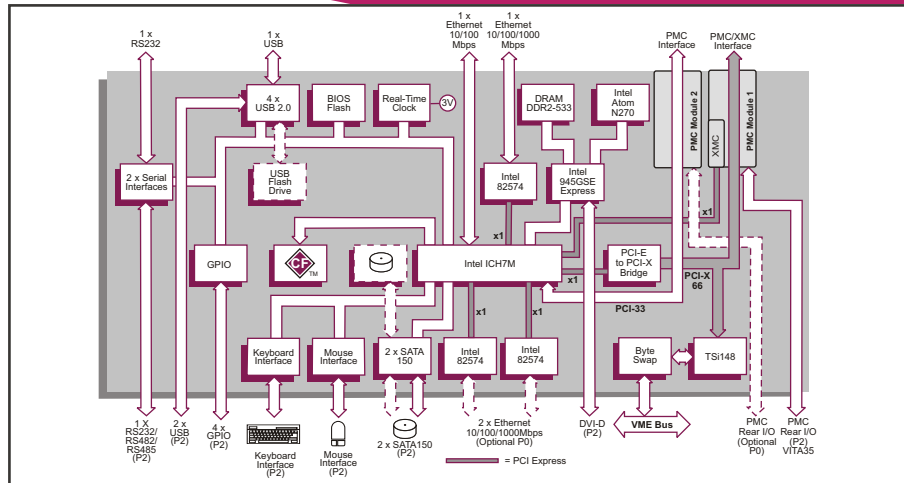

## Graphics Interface

- implemented by Intel 945GSE:-
  - resolutions up to 1600 x 1200 @ 16M colors
- DVI-D graphics accessed via P2 connector

## Flash EPROM

- 4 Mbytes of BIOS Flash EPROM

## Software Support

- supports Linux®, Windows® XP, Windows® XP Embedded, QNX®, and VxWorks®

## Firmware Support

- Phoenix™ TrustedCore BIOS
- comprehensive Power-On Self-Test (POST)
- LAN boot firmware included

## Other Peripheral Interfaces

- PC-compatible Real Time Clock (Year 2000 compliant)
- 3 x USB 2.0 interfaces:-
  - 1 via a USB connector on front panel
  - 2 via P2 connector
- keyboard and mouse interfaces accessed via P2 connector
- watchdog timer
- 1 x 32-bit Long Duration Timer with processor interrupt capability
- 4 x GPIO signals via P2

## VME Interface

- P1 and P2 connectors compatible with VME64x
- implemented using Tundra® Tsi148 device
- VME Master/Slave
- A32/A24/A16/D64/D32/D16/D8(E0)/MBLT64
- fast hardware byte swapping
- auto system controller detect
- full interrupter/interrupt handler support

## Safety

- PCB (PWB) manufactured with flammability rating of 94V-0

## Electrical Specification

- +5V@4.4 A (typical, 2Gbytes SDRAM)
- +12V@0.0A; -12V@0.0A; 3.3V not required
- +12V and -12V routed to both PMC sites

## Environmental Specification

- operating temperatures:-
  - 0°C to +55°C (N-Series)
  - -25°C to +70°C (E-Series)
  - -40°C to +85°C (K-Series)
- storage temperature - VITA 47 Class C1
- operating altitude - 0 to 15,000 feet (0 to 4,572 meters)
- 5% to 95% Relative Humidity, non condensing (operating or storage):-
  - K-Series includes humidity sealant
- ruggedized versions planned, see separate datasheets:-
  - conduction-cooled: VP A45/01x-RC
  - air-cooled: VP A45/01x-RA

## Mechanical Specification

- 6U form-factor
- single slot, front panel width 0.8 inch (20.3mm)
- utilizes 160-way connectors for P1 and P2
- optional P0
- IEEE 1101.10 handles
- operating shock - VITA 47 Class OS1
- operating vibration - VITA 47 Class V1

## ORDERING INFORMATION

Order Number Product Description (Hardware)

Replace the order number suffix (-xy) with selections from the following:

Where x = P2/P0 Breakout combinations

Where y = SDRAM size

VP A45/013-x2 1.6 GHz Atom processor N270

5 - No P0, PMC (VITA35 P4V2-64ac)  
6 - P0 fitted, PMC (VITA35 P4V2-64ac)

1 - reserved  
2 - 2 Gbytes

AD 110/001-zz SATA 2.5-inch Mass Storage Drive kit  
AD CR3/PMC-zz PMC Carrier board for 2 PMC modules

AD VP2/020-10 Rear Transition Module with I/O peripheral connectors, no P0: use when x = 5, i.e. VP A45/013-5y  
AD VP2/020-30 Rear Transition Module with I/O peripheral connectors, P0 fitted: use when x = 6, i.e. VP A45/013-6y  
AD 235/001-0z USB Flash Drive Module (optional, fits on VP A45/01x baseboard)

For z options please contact your local sales office

For extended temperature, 1.6 GHz E and K-Series, please contact your local sales office

For ruggedized versions, see separate datasheets: VP A45/01x-RC (conduction-cooled) or VP A45/01x-RA (air-cooled))