


Rugged conduction-cooled 3U VPX™ board based on Intel® Xeon® Processor D-1500 Family

Key Features

TR C4x/3sd-RCx provides server grade performance and excellent storage connectivity for high performance embedded computer applications. It is designed to be suitable for rugged and extended temperature operating environments.



- Intel® Xeon® processor D-1500 Family:
 - 8-core processing or 12-core processing
- Up to 32 Gbytes of DDR4 DRAM
- On-board solid state drive (SSD) option:
 - Flash Drive Module
- 2 x 10GBASE-KR Data Plane
- Up to x16 PCI Express® Gen 3 Expansion Plane
- Support for Linux® and Windows®

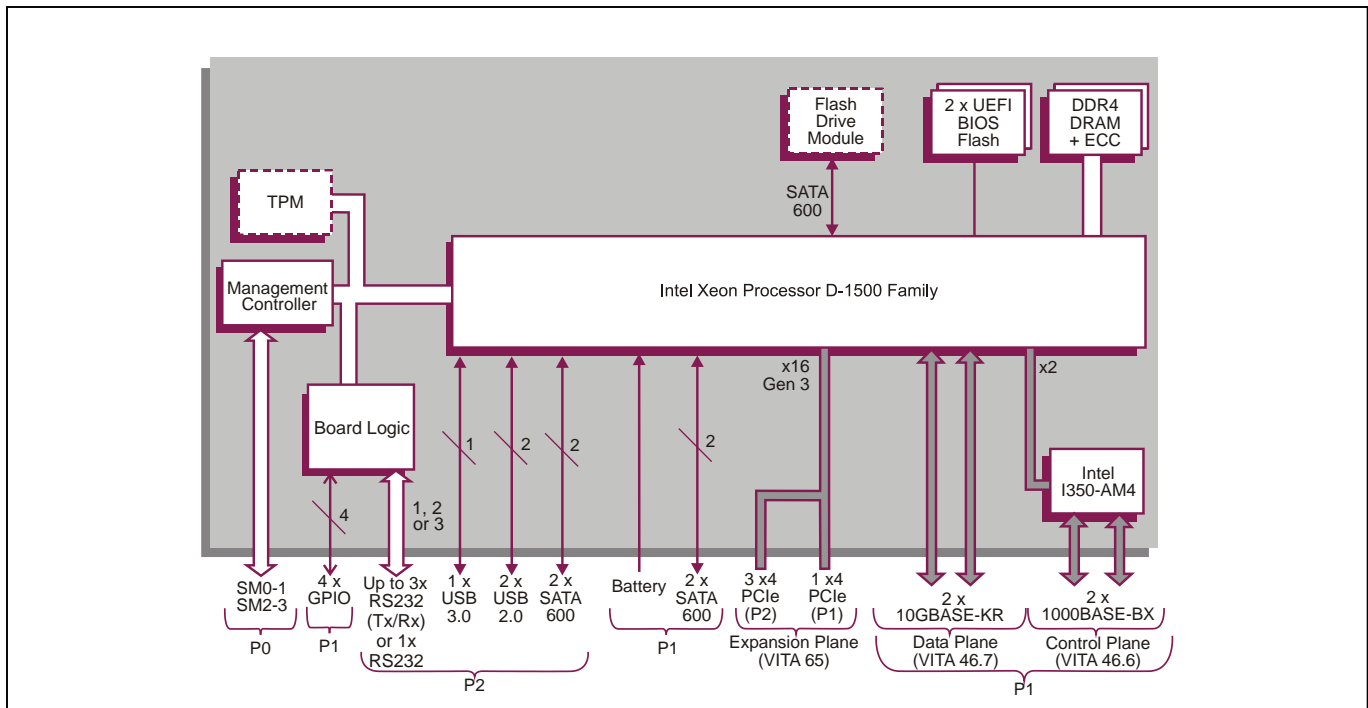

VPX-REDI Embedded Computer Board

- conduction-cooled 3U VPX-REDI™ board utilizing the Intel® Xeon® processor D-1500 family
- OpenVPX™ profiles supporting:
 - MOD3-PAY-2F4F2U-16.2.10-8
 - MOD3-PAY-2F1F2U-16.2.1-8
- air-cooled VPX variants available:
 - see separate TR C4x/msd datasheet

Central Processor

- 8-core Intel® Xeon® processor D-1539:
 - 12 Mbytes Cache, 1.6 GHz
- 12-core Intel® Xeon® processor D-1559:
 - 18 Mbytes Cache, 1.5 GHz
- Intel® Advanced Vector Extensions 2
- Intel® AES New Instructions
- server class processing cores in a System-on-a-Chip package

DRAM

- up to 32 Gbytes soldered DDR4 ECC DRAM:
 - single bit error correction, dual bit error detection
 - dual channel architecture
- accessible from processor or VPX Expansion Plane

Serial Ports

- up to three user selectable RS232 serial ports
- the first RS232 port via P2 supports either:
 - Tx/Rx CTS/RTS, DTR/DSR
 - or Tx/Rx
- when enabled, the second and third RS232 (Tx/Rx) port are switched to the P2 connector (losing the first port modem signals). 16550 compatible UARTs

Other Peripheral Interfaces

- PC RTC, long duration timer, watchdog timer
- up to three USB ports:
 - 2 x USB 2.0 ports via P2
 - 1 x USB 3.0 port via P2
- 4 x GPIO signals via P1

Mass Storage Interfaces

- 5 x SATA600 interfaces:
 - 2 x SATA via P1
 - 2 x SATA via P2
 - 1 x SATA routed to an optional on-board Flash Drive Module

Graphics Interface

- an on-board graphics interface is not supported
- if graphics interface support is required, use an Expansion Plane PCI Express port via backplane to a graphics processor module

VPX Control Plane, One Gigabit Ethernet

- VPX Control Plane supports 2 x 1000 Mbps IEEE802.3z SerDes (1000BASE-BX) interfaces (VITA 46.6):
 - compatible with OpenVPX module profiles
 - supports IEEE 1588 "Deterministic Network Timing" (contact sales office for supported operating systems)

VPX Data Plane, Ten Gigabit Ethernet

- VPX Data Plane supports 2 x 10 Gigabit Ethernet (10GBASE-KR) interfaces (VITA 46.7):
 - compatible with OpenVPX module profiles

VPX Expansion Plane, PCI Express

- configurable PCI Express® (PCIe®) VPX Expansion Plane interface (VITA 65) supports:
 - 1 x4 PCIe port via P1 connector
 - 3 x4 PCIe ports via P2 connector
 - the 16 lanes can be configured as 4 x4 ports, 2 x8 ports or 1 x16 port
 - compatible with OpenVPX module profiles
- PCIe interface supports Gen 1, Gen 2 and Gen 3
- supports a Non-Transparent Bridge (NTB) port for multi-processing configurations
- 4 channel DMA engine for fast data block moves
- ports can be configured by the VPX Switch Configuration Tool, see separate datasheet
- supports optional Fabric Interconnect Networking Software (FIN-S), see separate datasheet

System Management

- IPMI via SM0-1 and SM2-3:
 - CPU temperature and voltage monitor accessed via System Management interface
- Baseboard Management Controller (BMC)

Optional Board Security Packages

- Trusted Platform Module (TPM):
 - compliant to TCG v1.2
- proprietary hardware/software board security

Optional Built-In Test (BIT) Support

- Power-on BIT, Initiated BIT, Continuous BIT

Software Support

- supports Linux® and Windows®

Firmware Support

- UEFI boot firmware (BIOS):®
 - UEFI 2.4 support
 - EDK II support
 - includes Compatibility Support Module
- LAN boot firmware included

Non-Volatile Memory

- 16 Mbytes of BIOS Flash EEPROM, dual devices

Safety

- PCB (PWB) manufactured with flammability rating of UL94V-0

Electrical Specification

- typical current consumption for 8-core processor (1.6 GHz) with 32 Gbytes DRAM:
 - +5V @ 5.6A
 - +3.3V @ 1.2A; +3.3V AUX @ 0.3A

Environmental Specification

- conduction-cooled (VITA 48.2)
- operating temperature at card edge (selected CPU):
 - VITA 47 Class CC4, -40°C to +85°C
- operating temperature at card edge (selected CPU):
 - VITA 47 Class CC3, -40°C to +70°C
- non-operating temperature:
 - VITA 47 Class C4, -55°C to +105°C
- operating altitude:
 - -1,000 to 50,000 feet (-305 to 15,240 meters)
- 5% to 95% Relative Humidity, non-condensing

Mechanical Specification

- 3U VPX form-factor (VITA 46.0, VITA 48.0):
 - 3.9 inches x 6.3 inches (100mm x 160mm)
- slot widths (VITA 48.0):
 - 0.8 inches VPX-REDI Type 2, RCT-Series
 - 0.85 inches VPX-REDI Type 1, RCS-Series, Type 1 Two Level Maintenance (VITA 48.2)
- connectors to VITA 46.0 for P0, P1 and P2
- captive screws available to secure front handles
- operating mechanical:
 - shock - VITA 47 Class OS2, 40g
 - random vibration - VITA 47 Class V3, 0.1g²/Hz