



BMP-1

BMT-1

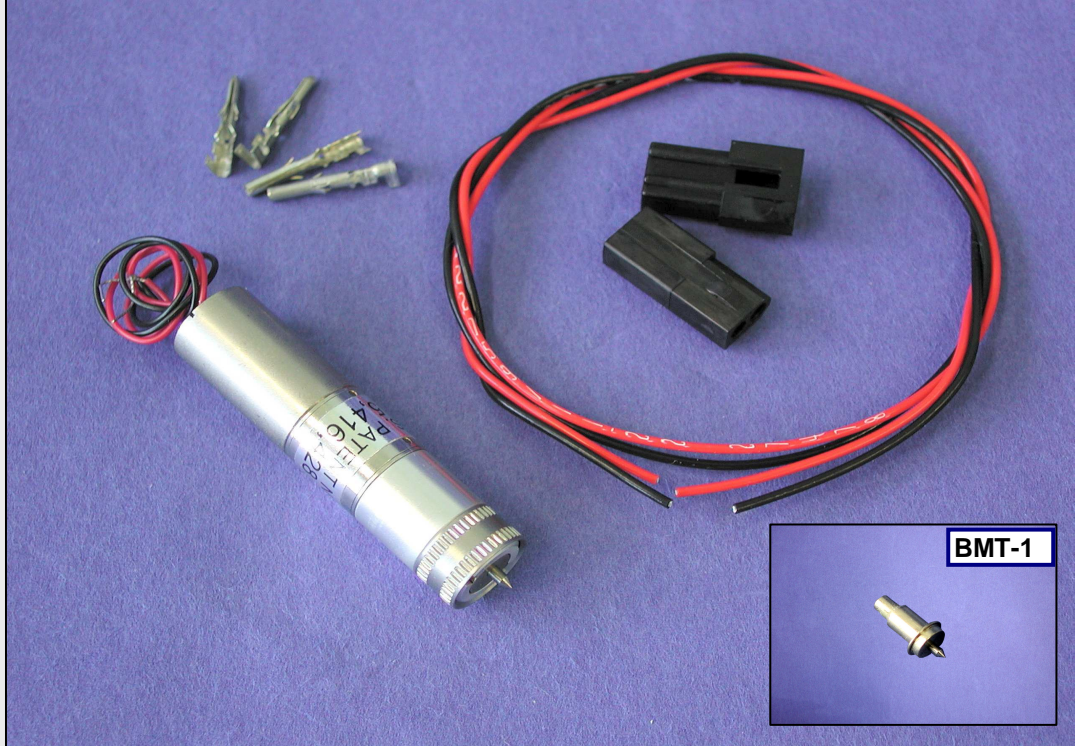

Specification

- Compact construction
 - Marker tip spring-mounted
 - Corrugated receptacle (with press ring)
 - Cables and connectors incl.
 - Short delivery time
- | | |
|---------------------------|-----------------------------------|
| - Rated Voltage: | 15V DC |
| - Rated Current: | 50 milliamps |
| - Recomm. Duty Cycle: | 1 second on min. 5 seconds off |
| - Full Marker Tip Travel: | 1,6 mm |
| - Recomm. Working Travel: | 1,3 mm |
| - Scribed Diameter: | 1,3 mm |
| - Direction of Rotation: | CCW |
| - Plunger Tip: | Carbido |
| - Receptacle: | Stainless steel |
| - Mounting Hole Size: | 11,9 mm |

