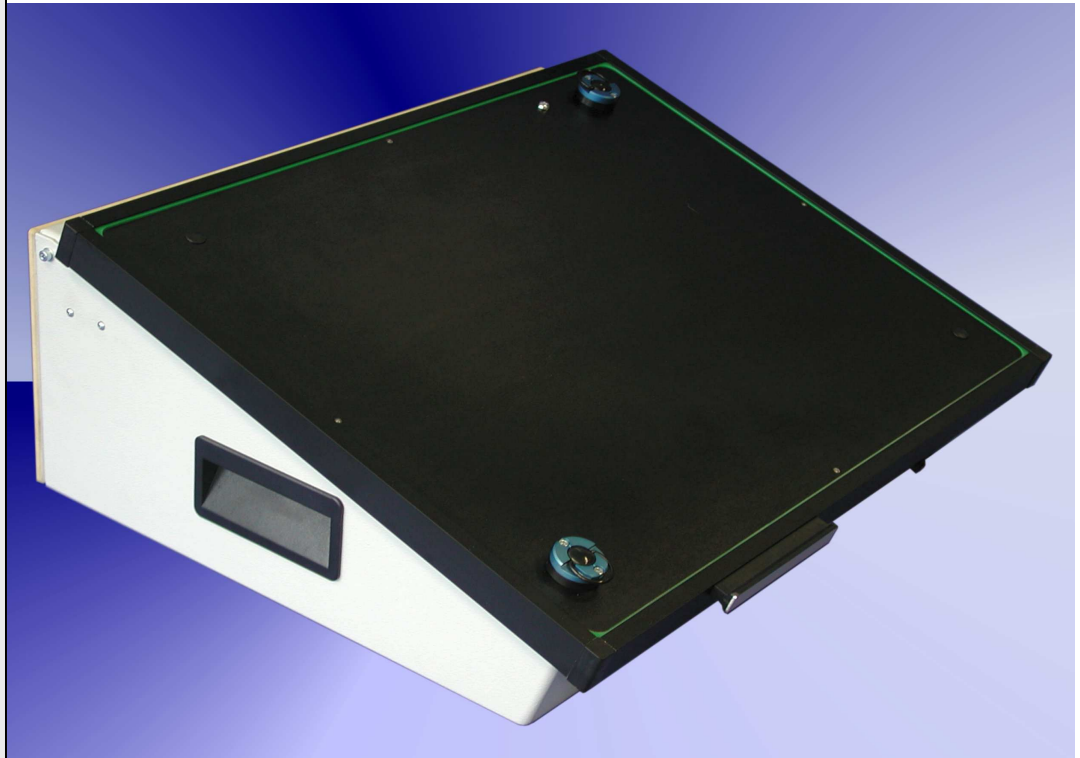


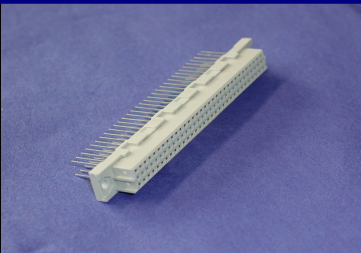
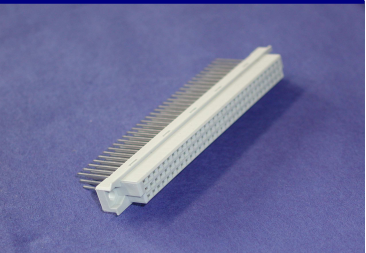
TSU-50-1100



Fixture specification

- Outside dimensions : 510 x 440 x 210 mm
- Max. working area : 450 x 310 mm
- Cant for easy handling
- Stable quality through the case and the aluminium frame
- PAG - plug and guide system
- Moving plate made of ESD plate material
- Probe plate made of G10 (CP quality) 10 mm
- GPS ESD sealing of vacuum chamber
- Rounded edges (for a better intake)
- Protecting errector standard
- Case can be opened during the debugging
- ESD leakage probes standard
- Moving plate 8 mm (optional)
- Interface without insertion
- Short delivery time

Accessories for TSU-50-1100

Specification: Interface connector, 64 pole		Specification: Interface connector, 96 pole	
Order number:	FL-C-64-WW-17-Gerade	Order number:	FL-C-96-WW-13-Gerade