


G12 Mechanical Fixtures

G12 Mass InterConnect Solution


Mechanical Fixtures G12-M-1500-I for G12 Receiver

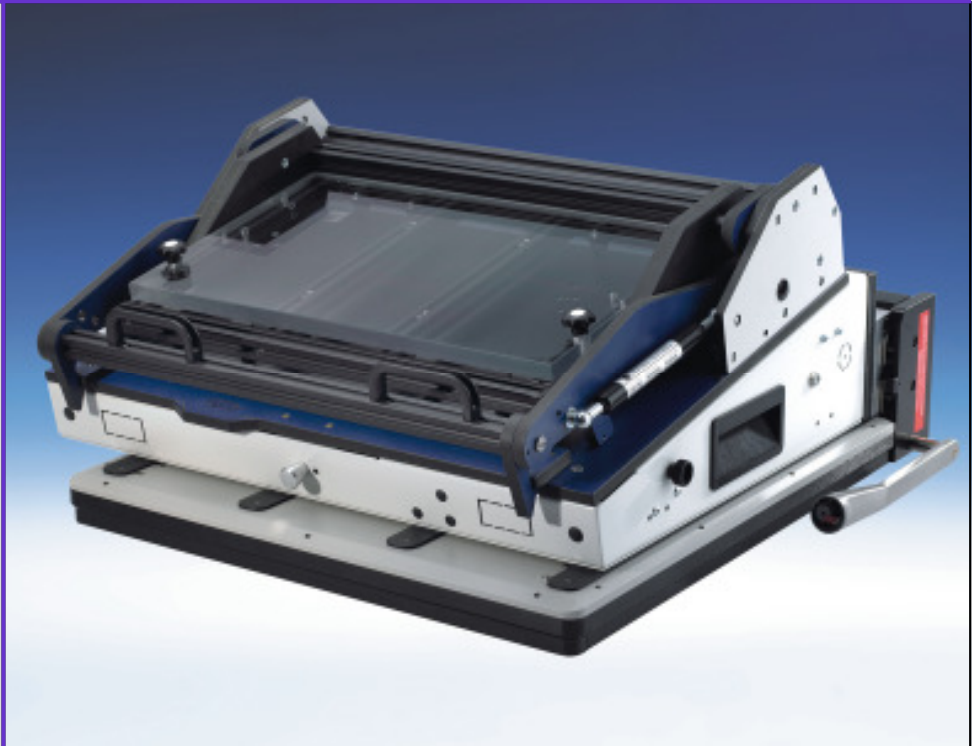



Specification:

- Interface are modular and reconfigurable
- Parallel mechanical pressure unit
- Outside dimensions: 530 x 450 x 240 mm
- Max. working area : 330 x 180 mm
- Lower-cost through the changeable unit
- Fast change of the probe plate and the pushdown plate
- Internal interface holding for max. 6 interface-blocks, each have 170 pins
- Probe plate and pushdown plate are not included
- Various accessories
- Individual completion through the unit assembly system
- QuadraPaddle™ contacts ensure reliable connections to over 20.000 mating cycles
- Deskform for easy handling
- Stable quality through the case and the aluminium frame
- Exact guidance
- Thermocouple and fiber optic integrable

Accessories for G12 Mechanical Fixture

<p>Changeable probe plate with wire shield plate Outside dimensions: 400 x 270 mm Working area: 330 x 180 mm</p> <p>Order number: WA-KTP-400-I</p>	
<p>Changeable moving plate, spring-mounted Outside dimensions: 400 x 270 mm Working area: 330 x 180 mm</p> <p>Order number: WA-PAP-400-I</p>	
<p>Holddown plate made of ESD acrylic plastic (15 mm) Outside dimensions: 407 x 240 mm</p> <p>Order number: WA-AP-400</p>	
<p>Holddown element, one piece crosshead with 3 height adjustable pushdown fingers, mounting material incl., min. quantity per fixture: 2 pieces Length: 408 mm</p> <p>Order number: WA-AE-400</p>	
<p>Interface-block, 170 pol with probes, max. 6 blocks for a G12-M-1500-I adjustable, mounting material incl.</p> <p>Order number: WA-M/P-IF-170</p>	

Accessories for G12 Mechanical Fixture

<p>Starter button, magnetic, for G12-M-1500-I deskform with parallel holddown mechanic- system</p> <p>Order number: WA-M-1500-MS</p>	
<p>Interface-block, 170 pole, with interface pins, max. 6 blocks in a WA-KTP-400-I adjustable, mounting material incl.</p> <p>Order number: WA-KTP-IF-170</p>	
<p>Spring probes for UUT seating, sockets incl., spring force 3N Expanded height: 13,3mm</p> <p>Point style: OD 3 mm (plastic) Order number: WA-GPA-13-3N-K</p> <p>Point style: 4 mm (nickel) Order number: WA-GPA-13-3N</p>	