


TY-88-4100

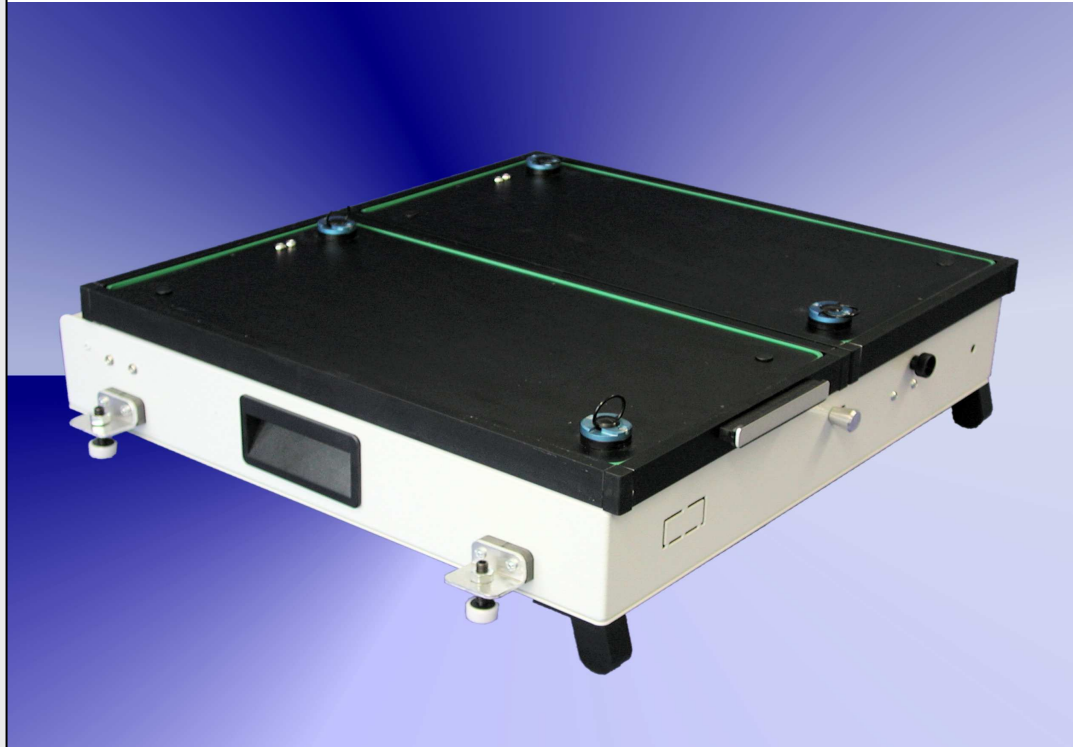

Fixture specification

- Outside dimensions : 510 x 520 x 130 mm
- Max. working area :2x (190 x 350 mm)
- Stable quality through the case and the aluminium frame
- PAG - plug and guide system
- Moving plate made of ESD plate material
- Probe plate made of G10 (CP quality) material, 10 mm
- GPS ESD sealing of vacuum chamber
- Rounded edges (for a better intake)
- Protecting errector standard
- Case can be opened during the debugging
- Outpourings intended for the use of a counter
- ESD leakage pins standard
- Ancillary equipement (for an easy replacement on the testsystem)
- Supports on the sides
- Interface spring-mounted (for safety reasons)
- Outpouring intended for the use of 2K interface
- Interface without insertion (must be ordered separately)
- Moving plate 8 mm (optional)
- Short delivery time