


## TSI-50-2100

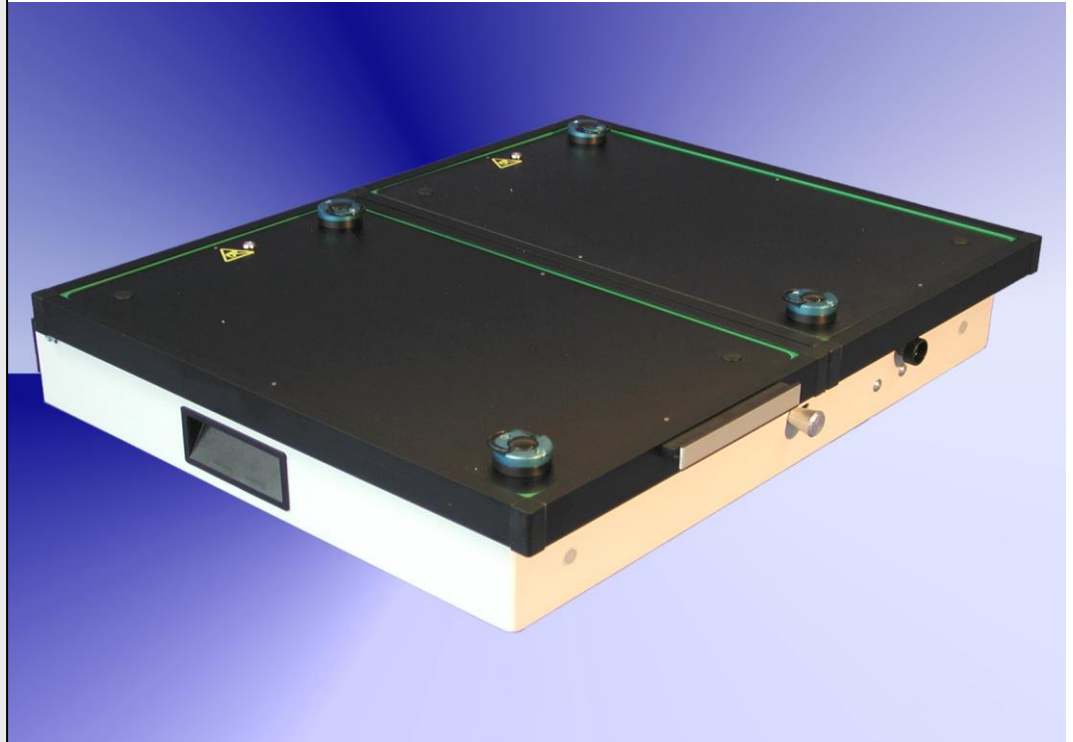

### Fixture specification

- Outside dimensions: 510 x 430 x 100 mm
- Max. working area: 2 x (290 x 146) mm
- Stable quality through the case and the aluminium frame
- PAG - plug and guide system
- Moving plate made of ESD plate material
- Probe plate made of G10 ( CP quality ) 10 mm
- GPS ESD sealing of vacuum chamber
- Rounded edges ( for a better intake )
- Protecting errector standard
- Case can be opened during the debugging
- ESD leakage probes standard
- Grip to open the fixture
- Moving plate 8 mm ( optional )
- Short delivery time

**Accessories for TSI-50-2100**

<p><b>Specification:</b> Interface block , 170 pole, interface pin flat</p> <p><b>Order number:</b></p>	 <p><b>TSI-50-100</b></p>	<p><b>Specification:</b> Interface block , 170 pole, interface pin cup</p> <p><b>Order number:</b></p>	 <p><b>TSI-50-102</b></p>