

# Plate & Filament *260 Series*

## Universal Primary & 50/60 Hz. Operation




### Features

- Universal primary with taps for 100, 120, 220 or 240 VAC, 50/60 Hz.
- Designed for preamps, low power amps, general replacement, test equipment, etc.
- Economical, open frame, chassis mount - two hole (.187 dia. = G) channel bracket (figure #1) or four hole mounting (figure #2).
- Units include a Faraday shield between the primary and secondary windings. Our electrostatic shield reduces the capacitive coupling from the primary - greatly attenuating higher frequency current coupling to the secondaries.
- Minimum 5" long leads.
- For more selection check out our **300 Series** of universal plate & filament transformers.

### NOTES

1. These units are designed to run with BOTH primary windings energized for maximum efficiency (see wiring table below).
2. The Faraday shield lead - the gray wire - marked SH (shield) above, should remain grounded to the mounting bracket & in turn to the chassis.

### Gallery

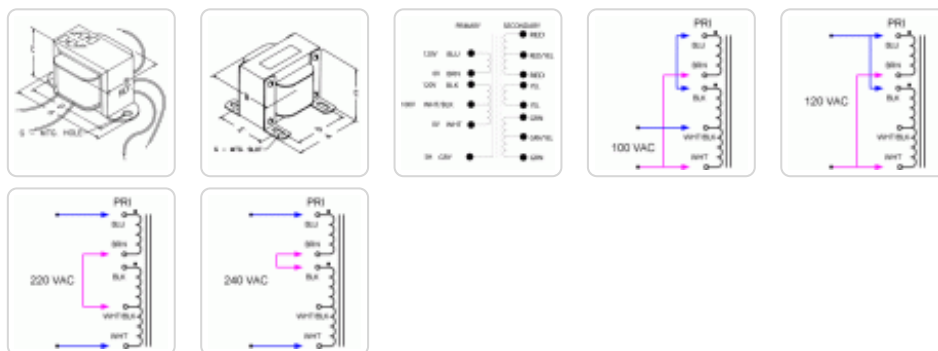

Part No.	VA	A.C. High Voltage	A.C. Filament	A.C. Filament	Figure # or PDF File	Dimensions					
		Secondary #1 RMS	Secondary #2 RMS	Secondary #3 RMS		A	B	C	D	E	G
<b>260A</b>	22	400V C.T. @ 40ma.	6.3V C.T. @ 1A	-	1	3.25	2.00	2.00	2.81	-	0.19
<b>260A6</b>	57	740V C.T. @ 60ma.	6.3V C.T. @ 2A	-	See PDF	-	-	-	-	-	-
<b>260C</b>	65	500V C.T @ 85ma..	5V @ 2A	6.3V C.T. @ 2A	1	4.03	2.65	2.62	3.56	-	0.19
<b>260E</b>	80	450V C.T. @ 115ma.	5V @ 2A	6.3V C.T. @ 3A	See PDF	3.00	3.06	2.53	2.50	2.40	0.21 x 0.38
<b>260G</b>	175	550V C.T. @ 230ma.	5V @ 3A	6.3V C.T. @ 5A	See PDF	3.75	3.50	3.13	3.25	3.25	0.20 x 0.38
<b>260J</b>	152	650V C.T. @ 173ma.	5V @ 2A	6.3V C.T. @ 4A	2	3.75	3.13	3.13	3.12	2.75	0.22 x 0.56
<b>260K</b>	197	650V C.T. @ 230ma.	5V @ 3A	6.3V C.T. @ 5A	2	4.50	3.25	3.75	3.75	3.00	0.22 x 0.56

Part No.	VA	A.C. High Voltage	A.C. Filament	A.C. Filament	Figure # or PDF	Dimensions							
		Secondary #1 RMS	Secondary #2 RMS	Secondary #3 RMS		File	A	B	C	D	E	G	
<b>260M</b>	248	700V C.T. @ 288ma.	5V @ 3A	6.3V C.T. @ 5A	2	4.50	3.25	3.75	3.75	3.00	0.22	x	0.56

*Data subject to change without notice*

© 2017. Hammond Manufacturing Ltd. All rights reserved.