


- Versatile, compact footswitch
- Durable and reliable with steel housing for long life and reliability (stainless steel versions available)
- Wide choice of colours and switching functions
- Customer colours and logos available on request
- Special designs to customer specifications
- Protection IPX2 or IPX7 (IPX8 on request)
- Medical versions
- Available as multiple pedal versions
- Non-electric versions possible (see air switch information)



Outline dimensions

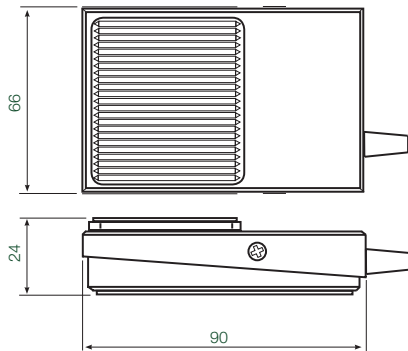

6289 - Range options and specifications

| | | Stock models | | | | | | | | |
|-------------------------------------|-------|---|----------------|----------------|----------------|----------------|----------------|----------------|-----------------|--|
| Model part no. | | 6289-WO | 6289-CC | 6289-PP | 6289-DO | 6289-SC | 6289-DA | 6289-CT | 6289-WS | |
| Depth | mm | | | | | | | | 90 | |
| Width | mm | | | | | | | | 66 | |
| Height | mm | | | | | | | | 24 | |
| Weight | Kg | | | | | | | | 0.38 | |
| Material | Body | 16 SWG mild steel, powder coat grey hammertone | | | | | | | Stainless steel | |
| | Tread | Polypropylene, black | | | | | | | | |
| | Guard | 18 SWG mild steel, powder coat grey hammertone | | | | | | | | |
| No. of poles & action | | SPST N/O | SPCO | SPST Latching | DPST N/O | SPST N/O | DPST staggered | SPCO | SPST N/O | |
| Cable | | 2 core + earth | 3 core + earth | 2 core + earth | 4 core + earth | 2 core + earth | 4 core + earth | Terminal block | 2 core + earth | |
| Cable length as standard | m | 2 | 2 | 2 | 2 | 2 | 2 | n/a | 2 | |
| Cable O/D | mm | 6.8 (nom) | 6.8 (nom) | 6.8 (nom) | 6.8 (nom) | 6.8 (nom) | 6.8 (nom) | n/a | 6.8 (nom) | |
| Current rating at 250V AC (½ HP) | A | 6(1.5) | 6(6) | 6(3) | 3(3) | 6(3) | 3(3) | 6(3) | 3(3) | |
| IP rating of internal switch module | | IPX7 | IPX2 | IPX2 | IPX2 | IPX2 | IPX2 | IPX2 | IPX7 | |
| Standards | | Footswitch: low voltage directive 2006/95/EC, EN 60950; Microswitch: EN 61058-2-1, EN 61058 | | | | | | | | |
| Operating temperature | °C | | | | | | | | -5 to +40 | |

Various connection cables are available (up to protection IPX8).
Low volume surcharge for non-standard models