

# 6289 General Purpose Single Footswitch


# herga

Technology Ltd

- Versatile, compact footswitch
- Durable and reliable with steel housing for long life and reliability (stainless steel versions available)
- Wide choice of colours and switching functions
- Customer colours and logos available on request
- Special designs to customer specifications
- Protection IPX2 or IPX7 (IPX8 on request)
- Medical versions
- Available as multiple pedal versions
- Non-electric versions possible (see air switch information)



## Reference dimensions

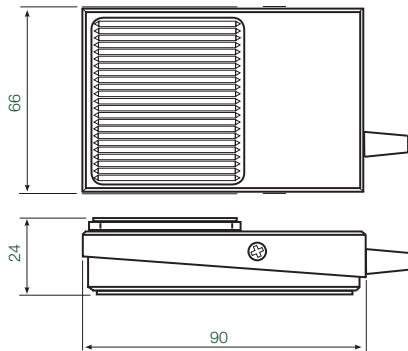

## 6289 - Range options and specifications

|                                     |       | Stock models  |                |                |                |                |                |                |                 |  |
|-------------------------------------|-------|---|----------------|----------------|----------------|----------------|----------------|----------------|-----------------|--|
| Model part no.                      |       | 6289-WO   | 6289-CC        | 6289-PP        | 6289-DO        | 6289-SC        | 6289-DA        | 6289-CT        | 6289-WS         |  |
| Depth                               | mm    |   |                |                |                |                |                |                | 90              |  |
| Width                               | mm    |   |                |                |                |                |                |                | 66              |  |
| Height                              | mm    |   |                |                |                |                |                |                | 24              |  |
| Weight                              | Kg    |   |                |                |                |                |                |                | 0.38            |  |
| Material                            | Body  | 16 SWG mild steel, powder coat grey hammertone  |                |                |                |                |                |                | Stainless steel |  |
|                                     | Tread | Polypropylene, black  |                |                |                |                |                |                |                 |  |
|                                     | Guard | 18 SWG mild steel, powder coat grey hammertone  |                |                |                |                |                |                |                 |  |
| No. of poles & action               |       | SPST N/O  | SPCO           | SPST Latching  | DPST N/O       | SPST N/O       | DPST staggered | SPCO           | SPST N/O        |  |
| Cable                               |       | 2 core + earth  | 3 core + earth | 2 core + earth | 4 core + earth | 2 core + earth | 4 core + earth | Terminal block | 2 core + earth  |  |
| Cable length as standard            | m     | 2   | 2              | 2              | 2              | 2              | 2              | n/a            | 2               |  |
| Cable O/D                           | mm    | 6.8 (nom)   | 6.8 (nom)      | 6.8 (nom)      | 6.8 (nom)      | 6.8 (nom)      | 6.8 (nom)      | n/a            | 6.8 (nom)       |  |
| Current rating at 250V AC (½ HP)    | A     | 6(1.5)  | 6(6)           | 6(3)           | 3(3)           | 6(3)           | 3(3)           | 6(3)           | 3(3)            |  |
| IP rating of internal switch module |       | IPX7  | IPX2           | IPX2           | IPX2           | IPX2           | IPX2           | IPX2           | IPX7            |  |
| Standards                           |       | Footswitch: low voltage directive 2014/35/EU, EN 60950; Microswitch: EN 61058-2-1, EN 61058 |                |                |                |                |                |                |                 |  |
| Operating temperature               | °C    |   |                |                |                |                |                |                | -5 to +40       |  |

Various connection cables are available (up to protection IPX8).  
Low volume surcharge for non-standard models



Herga Technology Ltd - Northern Way - Bury St. Edmunds - Suffolk - IP32 6NN - UK  
sales@herga.com • www.herga.com • +44 (0)1284 701422

Subject to change without notice