HEYware II
featuring
Heyco's all new
PCB Supports
Product Line
HEYCO
®

HEYCO

CONTENTS

Pictorial Contents . . . . . I - IV

PCB Supports Selection Guide . . . . . 1 - 3

PCB Supports . . . . . 4 - 27

LED Spacers 28, 29

Cable, Wire Harness and Hose Clamps . . . . . 30 - 34

Stainless Steel Cable Clamps and Clips . . . . . 35 - 37

HEYClip™ Tension Wire Clips, MaxRunner® Cable Clip Arrays, Wave Locks, Lockit Loops and Clips, Locking Releasable Wire Clips and Cable Holders . . . . . 38 - 52

Hinged Edge Strain Relief Bushings 53

Nytye® Nylon Cable Ties, Mounting Platforms, Nytyes with Stainless Steel Locking Device, Heavy Duty Stainless Steel Wire Cable Ties, Stainless Steel Cable and Beaded Ties . . . . . 54 - 58

Braided Sleeving, Hose and Cable Wrap, Heyco-Flex™ Slit Tubing . . . . . 59 - 61

HEYClip Fasteners - Rivets . . . . . 62 - 67

HEYClip Fasteners - Arrow Clips, Shorty Mounting Buttons, Kayak Clips, Holster Clips and Push-In Fasteners . . . . . 68 - 70

HEYClip Snap Lock Pins, Turn Fastener and Pawl Lock 71

Rubber and Polyurethane Bumpers and Feet . . . . . 72 - 78

HEYware LabKits 79

©Copyright, Heyco Products, Inc., 3/2015

Heyco®, SunRunner®, MaxRunner®, Nytye®, SunRunner® EZ™, SunRunner 4™, Lockit™, HEYClip™, and Heyco-Flex™ are trademarks/registered trademarks of Heyco Products, Inc.

Pictorial Contents


4 PCB Imperial Spacing - HSP1, HSP2, HSP3

4 PCB Imperial Spacing - HDLSPTH

5 Imperial Spacing - HLSP1, HLSP2, HLSP3

5 PCB Imperial Spacing - HLSP4

6 PCB Imperial Spacing - HLSP5

6 PCB Imperial Spacing - HLSP6

6 PCB Imperial Spacing - HLSP7

6 PCB Imperial Spacing - HLSP8

7 PCB Imperial Spacing - HLSP9

7 PCB Imperial Spacing - HLSP10

7 PCB Imperial Spacing - HLSP11

7 PCB Imperial Spacing - HTLSP

8 PCB Imperial Spacing - HDLSP4, HDLSP5, HDLSP6, HDLSP7

9 PCB Imperial Spacing - HPS

9 PCB Imperial Spacing - HCDLCBST


10 PCB Imperial Spacing - HMCBP, HCBP

10 PCB Imperial Spacing - HMSPDLN, HMSPDL


11 PCB Imperial Spacing - HMSPS

11 PCB Imperial Spacing - HMPS

11 PCB Imperial Spacing - HPS-TD

11 PCB Imperial Spacing - HSP-MDL-3

12 PCB Metric Spacing - HSP-MDL-1, HSP-MDL-2

12 PCB Metric Spacing - HSP-MDLS-1, HSP-MDLS-2

13 PCB Metric Spacing - HSP-MDL-AH-1

13 PCB Metric Spacing - HDLSP1, HDLSP2, HDLSP3

14 PCB Reverse Locking Support - HLCBSC2

14 PCB Reverse Locking Support - HLCBSC3

14 PCB Reverse Locking Support - HLCBSC4, HLCBSC5

15 PCB Reverse Locking Support - HLCBSC6, HLCBSC7

15 PCB Reverse Locking Support - HLCBSC8

15 PCB Reverse Locking Support - HLCBSC9

16 PCB Reverse Locking Support - HLCBSC11

16 PCB Reverse Locking Support - HLCBSC12-2

16 PCB Reverse Locking Support - HLCBSC13

16 PCB Reverse Locking Supports - HCPS

17 PCB Reverse Locking Supports - Metric - HLCBSC

17 PCB Reverse Locking Supports - Metric - HLCBSC10

-18 PCB Blind Mount - HBS

18 PCB Blind Mount - HBS2

18 PCB Blind Mount - HBS3

18 PCB Blind Mount - HBS4

19 PCB Blind Mount - HBS5

19 PCB Blind Mount - HBS6

19 PCB Key Slot Mount - HKSLBN

19 PCB Rivet Mount - HRLSP

20 PCB Stackable Self-Retaining Spacers - HSSRS4, HSSRS6, HSSRS8

21 PCB Self-Retaining Spacers - HSRS4, HSRS6, HSRS8

22 PCB Screw & Lock Supports - HHCBS, HLCBS-TF

22 PCB Screw & Lock Supports - HTCBS Series

23 PCB Threaded Male - HSCBS3, HSCBS4, HSCBS5

24 PCB Threaded Male - HSCBS6, HSCBS7, HSCBS8, HSCBS

25 PCB Threaded Male - HSCBS1-632, HSCBS1-M3, HSCBS1-M4

25 PCB Threaded Male - HCBS-TMM

26 PCB Adhesive-Back Mount - HCBS

26 PCB Adhesive-Back Mount - HCBS2

26 PCB Adhesive-Back Mount - HCBS3

26 PCB Adhesive-Back Mount - HCBS4

27 PCB Adhesive-Backed Mount - Metric - HCBS

27 PCB Adhesive-Backed Mount - Metric HPSB

27 PCB Edge Holding - HTEHCBS

28 LED Spacers - HLEDM-1

28 LED Spacers - HLEDM-2

28 LED Spacers - HLEDS2M



29 LED Spacers - HLEDS2

29 LED Spacers - HLEDS3

29 LED Spacers - HLEDS1E

29 LED Spacers - HLEDS2E

30 Nylon Cable Clamps

31 Nylon Cable Clamps - Push Lock & Snap Lock

32 Nylon Wire Harness Clamps

32 Nylon Lockit Hose Clamps

33 Nylon Hose Clamps

34 Nylon Self-aligning Cable Clamps

35 Stainless Steel Cable Clamps

35 HEYClip Vinyl Coated Steel Clips

36 HEYClip SunRunner Cable Clips

36 HEYClip SunRunner EZ Cable Clip

37 HEYClip SunRunner 4 Cable Clip

37 HEYClip SunRunner 90 Cable Clip

38 HEYClip Tension Wire Clips-Nylon



39 HEYClip Tension Wire Clips-Vinyl

40 HEYClip MaxRunner Cable Clip Arrays

41 HEYClip Wave Locks

42 HEYClip Standard Lockit Loops

42 HEYClip Standoff Lockit Loops - Arrowhead Mount

43 HEYClip Standard Lockit Loops - Blind Mount

43 HEYClip Lockit Clips - Arrowhead Mount

44 HEYClip Locking Releasable Wire Clips - Arrowhead Mount

45 HEYClip Locking Release Wire Clips - Adhesive Back

46 HEYCip Locking Release Wire Clips - Adjustable

47 HEYClip Shorty Cable Holders



48 HEYClip Cable Holders - Top Entry, Arrowhead Mount



48 HEYClip Cable Holders - Side Entry, Arrowhead Mount

49 HEYClip Cable Holders - Blind Mount

49 HEYClip Cable Holders - Adhesive Back Mount

50 HEYClip Cable Holders - Standoff

50 HEYClip Cable Holders - Round

51 HEYClip Cable Holders - Lockit

51 HEYClip Cable Holders - Hinged

52 HEYClip Cable Holders - Hinged Edge

52 HEYClip Cable Holders - Edge



53 Hinged Edge Strain Reliefs

54 Nytye Nylon Cable Ties - Regular

54 Nytye Nylon Cable Ties - Screw Mount

54 Nytye Nylon Cable Ties - Push Mount

55 Nytye Nylon Cable Tie Mounting Platforms

56 Nytyes with Stainless Steel Locking Device

56 Heavy Duty Stainless Steel Wire Cable Ties

57 Stainless Steel Cable Ties - Standard & Coated

58 Beaded Ties



59 Braided Sleeving

60 Cable & Hose Wrap - Polyethylene

61 Cable & Hose Wrap - Nylon

61 Heyco-Flex Nylon Slit Tubing

62 & 63 HEYClip Nylon Snap Rivets

63 HEYClip Heat Resistant Snap Rivets

64 HEYClip Countersunk H Type Rivets

64 HEYClip Push (aka Drive) Rivets

65 HEYClip Releaseable T Type Rivets

65 HEYClip Drive Fasteners

66 HEYClip P Type Snap Rivets

66 HEYClip Shorty Snap Rivets

66 HEYClip Ratchet Rivets

67 HEYClip Unscrewing Snap Rivets

67 HEYClip Mini Tough Rivets

67 HEYClip Mounting Buttons

68 HEYClip Nylon Arrow Clips

68 HEYClip Shorty Mounting Buttons

69 HEYClips Kayak & Holster Clips

70 HEYClip Nylon Push-In Fasteners

70 HEYClip Thick Panel Nylon Push-in Fasteners

71 HEYClip Snap Lock Pins

71 HEYClip Turn Fastener

71 HEYClip Pawl Lock

72 & 73 Rubber Push-In Bumpers

74 Rubber Screw In Pocket Bumpers

75 Polyurethene Adhesive Back Bumpers

76 Break Away Bumpers

76 Feets of Strength - FSD & FSS Series

77 Feets of Strength - FSR Series

78 Snap In Feet

78 Low Profile Snap In Feet

Heyco® PCB Supports Selection Guide

Imperial Spacing Lengths

PCB Mounting Hole Diameter		CHASSIS Maximum Thickness		CHASSIS Mounting Hole Diameter		MOUNTING STYLES PCB End	MOUNTING STYLES Chassis End	SERIES	PAGE
in.	mm.	in.	mm.	in.	mm.				
Flat Rest Mounts									
.000	0,0	.062	1,6	.098	2,5	flat rest mount	teardrop snap lock	HPS-TD	11
		.078	2,0	.125	3,2	flat rest mount	arrowhead snap lock	HMPS	11
				.187	4,8	flat rest mount	arrowhead snap lock	HPS	9
For PCB's up to .062˝ (1,6 mm) Thick									
.098	2,5	.039	1,0	.079	2,0	teardrop snap lock	teardrop snap lock	HSP-MDL-3	11
		.062	1,6	.098	2,5	teardrop snap lock	teardrop snap lock	HDLSPTH	4
				.098	2,5	cupped teardrop lock	cupped teardrop lock	HCDLCBST	9
				.125	3,2	bayonet snap lock 8,7	teardrop snap lock	HTLSP	7
.125	3,2	.062	1,6	.125	3,2	two prong snap lock	two prong snap lock	HMSPDLN	10
						two prong snap fit	two prong snap lock	HMCBP	10
						bayonet snap lock 8,7	two prong snap lock	HLSP11	7
		.078	2,0	.125	3,2	bayonet snap lock 8,7	arrowhead snap lock	HLSP9	7
.152	3,9	.062	1,6	.154	3,9	two prong snap lock	two prong snap lock	HMSPDL	10
						two prong snap fit	two prong snap lock	HCBP	10
.157	4,0	.055	1,4	.188	4,8	bayonet snap lock 10,2	arrowhead snap lock	HLSP8	6
		.062	1,6	.157	4,0	flanged two prong snap lock	flanged two prong snap lock	HMSPS	11
						two prong snap lock	two prong snap lock	HSP1	4
				.187	4,8	two prong snap lock	two prong snap lock	HSP3	4
		.078	2,0	.187	4,8	bayonet snap fit 10,2	arrowhead snap lock	HLSP4	5
						bayonet snap lock 10,2	arrowhead snap lock	HLSP1	5
						arrowhead snap lock	arrowhead snap lock	HLSP7	6
						bayonet snap fit 10,2	winged two prong snap lock	HLSP10	7
						bayonet snap lock 10,2	winged two prong snap lock	HLSP5	6
		.141	3,6	.187	4,8	bayonet snap lock 10,2	arrowhead snap lock	HLSP2	5
.187	4,8	.062	1,6	.187	4,8	two prong snap lock	two prong snap lock	HSP2	4
For PCB's up to .078˝ (2,0 mm) Thick									
.125	3,2	.078	2,0	.125	3,2	arrowhead snap lock	arrowhead snap lock	HDLSP4	8
.157	4,0	.078	2,0	.157	4,0	arrowhead snap lock	arrowhead snap lock	HDLSP5	8
				.187	4,8	arrowhead snap lock	arrowhead snap lock	HDLSP7	8
.187	4,8	.078	2,0	.187	4,8	arrowhead snap lock	arrowhead snap lock	HDLSP6	8
For PCB's up to .090˝ (2,3 mm) Thick									
.157	4,0	.078	2,0	.187	4,8	bayonet snap lock 10,9	arrowhead snap lock	HLSP3	5
		.141	3,6	.187	4,8	bayonet snap lock 10,9	arrowhead snap lock	HLSP6	6

Metric Spacing Lengths

PCB Mounting Hole Diameter		CHASSIS Maximum Thickness		CHASSIS Mounting Hole Diameter		MOUNTING STYLES PCB End	MOUNTING STYLES Chassis End	SERIES	PAGE
in.	mm.	in.	mm.	in.	mm.				
For PCB's up to .062˝ (1,6 mm) Thick									
.098	2,5	.062	1,6	.098	2,5	teardrop snap lock	two prong snap lock	HSP-MDL-AH-1	13
							teardrop snap lock	HSP-MDL-1	12
		.141	3,6	.098	2,5	teardrop snap lock	teardrop snap lock	HSP-MDLS-1	12
.138	3,5	.062	1,6	.138	3,5	teardrop snap lock	teardrop snap lock	HSP-MDL-2	12
		.141	3,6	.138	3,5	teardrop snap lock	teardrop snap lock	HSP-MDLS-2	12
.157	4,0	.062	1,6	.157	4,0	wingless arrowhead	wingless arrowhead	HDLSP1	13
				.187	4,8	wingless arrowhead	wingless arrowhead	HDLSP3	13
.187	4,8	.062	1,6	.187	4,8	wingless arrowhead	wingless arrowhead	HDLSP2	13

HEYCO

Heyco® PCB Supports Selection Guide

Reverse Locking Supports

PCB Mounting Hole Diameter in.	PCB Mounting Hole Diameter mm.	CHASSIS Maximum Thickness in.	CHASSIS Maximum Thickness mm.	CHASSIS Mounting Hole Diameter in.	CHASSIS Mounting Hole Diameter mm.	MOUNTING STYLES PCB End	MOUNTING STYLES Chassis End	SPACING	SERIES	PAGE
Flat Rest Mounts										
.000	0,0	.062	1,6	.187	4,8	flat rest mount	reverse button lock	Imperial	**HLCBSC3**	**14**
				.213	5,4	flat rest mount	reverse button lock	Imperial	**HLCBSC11**	**16**
For PCB's up to .062˝ (1,6 mm) Thick										
.125	3,2	.062	1,6	.187	4,8	bayonet snap lock 8,7	reverse button lock	Imperial	**HLCBSC2**	**14**
						two prong snap lock	reverse button lock	Imperial	**HLCBSC8**	**15**
						bayonet snap fit 8,7	reverse button lock	Imperial	**HLCBSC9**	**15**
.157	4,0	.047	1,2	.236	6,0	bayonet snap lock 10,2	reverse button lock	Imperial	**HLCBSC4**	**14**
						bayonet snap fit 10,2	reverse button lock	Imperial	**HLCBSC13**	**16**
		.062	1,6	.213	5,4	arrowhead snap lock	reverse button lock	Imperial	**HCPS**	**16**
						arrowhead snap lock	reverse button lock	Metric	**HLCBSC**	**17**
									HLCBSC10	**17**
		.067	1,7	.213	5,4	bayonet snap lock 10,2	reverse button lock	Imperial	**HLCBSC6**	**15**
				.250	6,4	bayonet snap lock 10,2	reverse button lock	Imperial	**HLCBSC7**	**15**
		.078	2,0	.213	5,4	bayonet snap lock 10,2	reverse button lock	Imperial	**HLCBSC5**	**14**
						arrowhead snap lock	reverse button lock	Imperial	**HLCBS12-2**	**16**

Blind, Key Slot, and Rivet Mount Supports

PCB Mounting Hole Diameter in.	PCB Mounting Hole Diameter mm.	CHASSIS Maximum Thickness* in.	CHASSIS Maximum Thickness* mm.	CHASSIS Mounting Hole Diameter in.	CHASSIS Mounting Hole Diameter mm.	MOUNTING STYLES PCB End	MOUNTING STYLES Chassis End	SPACING	SERIES	PAGE
Blind Mount, for PCB's up to .062˝ (1,6 mm) Thick										
.157	4,0	.250	6,4	.250	6,4	bayonet snap lock 10,2	blind fir tree	Imperial	**HBS4**	**18**
						bayonet snap fit 10,2	blind fir tree	Imperial	**HBS5**	**19**
				.312	7,9	bayonet snap lock 10,2	blind fir tree	Imperial	**HBS**	**18**
						bayonet snap fit 10,2	blind fir tree	Imperial	**HBS2**	**18**
Blind Mount, for PCB's up to .078˝ (2,0 mm) Thick										
.157	4,0	.250	6,4	.250	6,4	arrowhead snap lock	blind fir tree	Imperial	**HBS6**	**19**
				.312	7,9	arrowhead snap lock	blind fir tree	Imperial	**HBS3**	**18**
Key Slot and Rivet Mount - for PCB's up to .062˝ (1,6 mm) Thick										
.157	4,0	.062	1,6	.157	4,0	bayonet snap lock 10,2	key slot	Imperial	**HKSLBN**	**19**
		varies †		.165	4,2	bayonet snap lock 10,2	rivet	Imperial	**HRLSP**	**19**

*Minimum thickness for Blind Mount †For Panel Thicknesses see Rivet Table on page 19.

Self-Retaining Spacers

PCB Mounting Hole Diameter in.	PCB Mounting Hole Diameter mm.	CHASSIS Maximum Thickness in.	CHASSIS Maximum Thickness mm.	CHASSIS Mounting Hole Diameter in.	CHASSIS Mounting Hole Diameter mm.	MOUNTING STYLES PCB End	MOUNTING STYLES Chassis End	SPACING	SERIES	PAGE
For PCB's up to .062˝ (1,6 mm) Thick										
.185	4,7	varies ††		#4	M3	two prong snap lock	self-tap screw	Imperial	**HSSRS4** †	**20**
						two prong snap lock	self-tap screw	Imperial	**HSRS4**	**21**
.232	5,9	varies ††		#6	M3	two prong snap lock	self-tap screw	Imperial	**HSSRS6** †	**20**
						two prong snap lock	self-tap screw	Imperial	**HSRS6**	**21**
				#8	M4	two prong snap lock	self-tap screw	Imperial	**HSSRS8** †	**20**
						two prong snap lock	self-tap screw	Imperial	**HSRS8**	**21**

†Stackable ††Thread Depth varies with length of part.

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

Heyco® PCB Supports Selection Guide

Screw and Lock Supports

PCB Mounting Hole Diameter in.	PCB Mounting Hole Diameter mm.	PART DATA Thread Depth in.	PART DATA Thread Depth mm.	Mounting Screw in.	Mounting Screw mm.	MOUNTING STYLES PCB End	MOUNTING STYLES Chassis End	SPACING	SERIES	PAGE
For PCB's up to .062˝ (1,6 mm) Thick										
.157	4,0	.312	7,9	#6		bayonet snap lock 10,2	self-tap screw	Imperial	**HHCBS**	**22**
		varies †			M4	bayonet snap lock 10,2	female thread	Imperial	**HLCBS-TF**	**22**
PCB Thickness Varies										
.157	4,0	varies †			M3	bayonet snap lock 9,5	female thread	Metric	**HTCBS-M3-6**	**22**
									HTCBS-M3-8	**22**
					M4	bayonet snap lock 9,5	female thread	Metric	**HTCBS-M4-8**	**22**

†Thread Depth varies with length of part.

Threaded Male Supports

PCB Mounting Hole Diameter in.	PCB Mounting Hole Diameter mm.	CHASSIS Part Thread Length in.	CHASSIS Part Thread Length mm.	Mounting Hole Diameter in.	Mounting Hole Diameter mm.	MOUNTING STYLES PCB End	MOUNTING STYLES Chassis End	SPACING	SERIES	PAGE
For PCB's up to .062˝ (1,6 mm) Thick										
.125	3,2	.250	6,4		M3	bayonet snap lock 8,7	male thread	Imperial	**HSCBS3**	**23**
					M4	bayonet snap lock 8,7	male thread	Imperial	**HSCBS4**	**23**
				6-32		bayonet snap lock 8,7	male thread	Imperial	**HSCBS5**	**23**
.152	3,9	.236	6,0		M3	two prong snap fit	male thread	Imperial	**HSCBS1-M3**	**25**
					M4	two prong snap fit	male thread	Imperial	**HSCBS1-M4**	**25**
				6-32		two prong snap fit	male thread	Imperial	**HSCBS1-632**	**25**
.157	4,0	.250	6,4		M4	bayonet snap lock 10,2	male thread	Imperial	**HSCBS**	**24**
				8-32		bayonet snap lock 10,2	male thread	Imperial	**HSCBS8**	**24**
		.300	7,6		M4	bayonet snap lock 10,2	male thread	Imperial	**HSCBS7**	**24**
				6-32		bayonet snap lock 10,2	male thread	Imperial	**HSCBS6**	**24**
6-32		.300	7,6	6-32		double threaded male - .30˝ (7,6 mm) thread length		Imperial	**HCBS-TMM**	**25**

Adhesive-Back Mount and Edge Holding Supports

PCB Mounting Hole Diameter in.	PCB Mounting Hole Diameter mm.	CHASSIS Maximum Thickness in.	CHASSIS Maximum Thickness mm.	Mounting Hole Diameter in.	Mounting Hole Diameter mm.	MOUNTING STYLES PCB End	MOUNTING STYLES Chassis End	SPACING	SERIES	PAGE
Adhesive-Back Mount										
.000	0,0	.00	0,0	.00	0,0	flat rest mount	adhesive-back	Metric	**HPSB**	**27**
.098	2,5	.00	0,0	.00	0,0	teardrop snap lock	adhesive-back	Imperial	**HCBS4**	**26**
.125	3,2	.00	0,0	.00	0,0	bayonet snap lock 8,7	adhesive-back	Imperial	**HCBS3**	**26**
.157	4,0	.00	0,0	.00	0,0	bayonet snap lock 10,2	adhesive-back	Imperial	**HCBS**	**26**
								Metric	**HCBS-Metric**	**27**
						bayonet snap fit 10,2	adhesive-back	Imperial	**HCBS2**	**26**
Edge Holding-For PCB's .062˝ (1,6 mm) thick										
.157	4,0	.062	1,6	#6		edge snap lock	self-tap screw	Imperial	**HTEHCBS**	**27**
		.078	2,0	.187	4,8	edge snap lock	arrowhead snap lock	Imperial	**HEHCBS**	*

* Consult Heyco for HEHCBS Series.

Heyco® Nylon PCB Supports - Imperial Spacing



TWO PRONG SNAP LOCK / TWO PRONG SNAP LOCK

HSP1



TWO PRONG SNAP LOCK / TWO PRONG SNAP LOCK

HSP2



TWO PRONG SNAP LOCK / TWO PRONG SNAP LOCK

HSP3



TEARDROP SNAP LOCK / TEARDROP SNAP LOCK

HDLSPTH

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.157	4,0	.062	1,6	.187	4,8	.062	1,6	.157	4,0	.062	1,6	.098	2,5
Chassis	.062	1,6	.157	4,0	.062	1,6	.187	4,8	.062	1,6	.187	4,8	.062	1,6	.098	2,5

A		PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
in.	mm.								
.063	1,6							**10036**	HDLSPTH-01
.125	3,2							**10037**	HDLSPTH-02
.187	4,8	**10000**	HSP1-03	**10012**	HSP2-03	**10024**	HSP3-03	**10038**	HDLSPTH-03
.250	6,4	**10001**	HSP1-04	**10013**	HSP2-04	**10025**	HSP3-04	**10039**	HDLSPTH-04
.312	7,9	**10002**	HSP1-05	**10014**	HSP2-05	**10026**	HSP3-05	**10040**	HDLSPTH-05
.375	9,5	**10003**	HSP1-06	**10015**	HSP2-06	**10027**	HSP3-06	**10041**	HDLSPTH-06
.437	11,1	**10004**	HSP1-07	**10016**	HSP2-07	**10028**	HSP3-07	**10042**	HDLSPTH-07
.500	12,7	**10005**	HSP1-08	**10017**	HSP2-08	**10029**	HSP3-08	**10043**	HDLSPTH-08
.562	14,3	**10006**	HSP1-09	**10018**	HSP2-09	**10030**	HSP3-09	**10044**	HDLSPTH-09
.625	15,9	**10007**	HSP1-10	**10019**	HSP2-10	**10031**	HSP3-10	**10045**	HDLSPTH-10
.750	19,1	**10008**	HSP1-12	**10020**	HSP2-12	**10032**	HSP3-12		
.875	22,2	**10009**	HSP1-14	**10021**	HSP2-14	**10033**	HSP3-14	**10046**	HDLSPTH-14
1.000	25,4	**10010**	HSP1-16	**10022**	HSP2-16	**10034**	HSP3-16		

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

Heyco® Nylon PCB Supports - Imperial Spacing

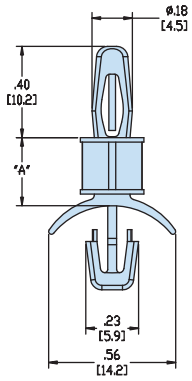

BAYONET SNAP LOCK 10,2 / ARROWHEAD SNAP LOCK

HLSP1

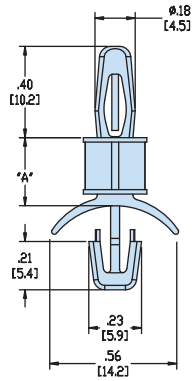

BAYONET SNAP LOCK 10,2 / ARROWHEAD SNAP LOCK

HLSP2

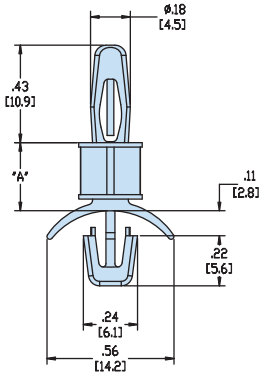

BAYONET SNAP LOCK 10,9 / ARROWHEAD SNAP LOCK

HLSP3

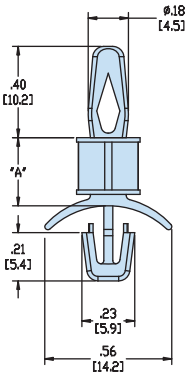

BAYONET SNAP FIT 10,2 / ARROWHEAD SNAP LOCK

HLSP4

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.157	4,0	.062	1,6	.157	4,0	.090	2,3	.157	4,0	.062	1,6	.157	4,0
Chassis	.078	2,0	.187	4,8	.141	3,6	.187	4,8	.078	2,0	.187	4,8	.078	2,0	.187	4,8

A		PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
in.	mm.	Natural		Natural		Natural		Natural*	
.187	4,8	**10048**	HLSP1-03	**10062**	HLSP2-03	**10076**	HLSP3-03	**10090**	HLSP4-03
.250	6,4	**10049**	HLSP1-04	**10063**	HLSP2-04	**10077**	HLSP3-04	**10091**	HLSP4-04
.312	7,9	**10050**	HLSP1-05	**10064**	HLSP2-05	**10078**	HLSP3-05	**10092**	HLSP4-05
.375	9,5	**10051**	HLSP1-06	**10065**	HLSP2-06	**10079**	HLSP3-06	**10093**	HLSP4-06
.437	11,1	**10052**	HLSP1-07	**10066**	HLSP2-07	**10080**	HLSP3-07	**10094**	HLSP4-07
.500	12,7	**10053**	HLSP1-08	**10067**	HLSP2-08	**10081**	HLSP3-08	**10095**	HLSP4-08
.625	15,9	**10054**	HLSP1-10	**10068**	HLSP2-10	**10082**	HLSP3-10	**10096**	HLSP4-10
.750	19,1	**10055**	HLSP1-12	**10069**	HLSP2-12	**10083**	HLSP3-12	**10097**	HLSP4-12
.875	22,2	**10056**	HLSP1-14	**10070**	HLSP2-14	**10084**	HLSP3-14	**10098**	HLSP4-14
1.000	25,4	**10057**	HLSP1-16	**10071**	HLSP2-16	**10085**	HLSP3-16	**10099**	HLSP4-16
1.125	28,6	**10058**	HLSP1-18	**10072**	HLSP2-18	**10086**	HLSP3-18	**10100**	HLSP4-18
1.250	31,8	**10059**	HLSP1-20	**10073**	HLSP2-20	**10087**	HLSP3-20	**10101**	HLSP4-20
1.375	34,9	**10060**	HLSP1-22	**10074**	HLSP2-22	**10088**	HLSP3-22	**10102**	HLSP4-22

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.
*Consult Heyco for HLSP4 in V-0 material.

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

Quick Specs

Heyco® Nylon PCB Supports - Imperial Spacing

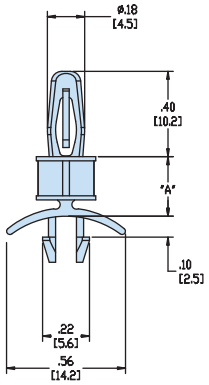

BAYONET SNAP LOCK 10,2 / WINGED TWO PRONG SNAP LOCK

HLSP5

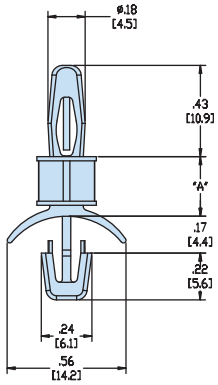

BAYONET SNAP LOCK 10,9 / ARROWHEAD SNAP LOCK

HLSP6

* A Dimension is to Top of PCB

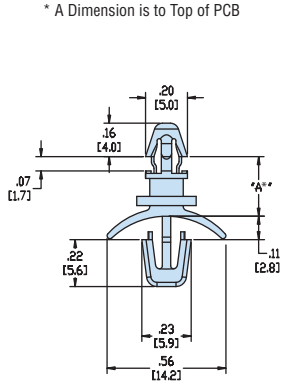

ARROWHEAD SNAP LOCK / ARROWHEAD SNAP LOCK

HLSP7

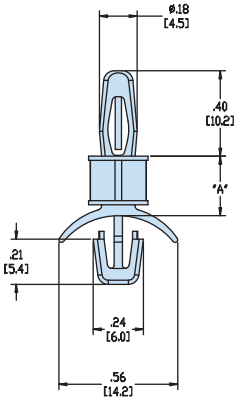

BAYONET SNAP LOCK 10,2 / ARROWHEAD SNAP LOCK

HLSP8

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.157	4,0	.090	2,3	.157	4,0	.062	1,6	.157	4,0	.062	1,6	.157	4,0
Chassis	.078	2,0	.187	4,8	.141	3,6	.187	4,8	.078	2,0	.187	4,8	.055	1,4	.187	4,8

A		HLSP5		HLSP6		HLSP7		HLSP8	
in.	mm.	PART NO. Natural*	DESCRIPTION	PART NO. Natural*	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
.187	4,8	**10104**	HLSP5-03	**10118**	HLSP6-03	**10132**	HLSP7-03	**10146**	HLSP8-03
.250	6,4	**10105**	HLSP5-04	**10119**	HLSP6-04	**10133**	HLSP7-04	**10147**	HLSP8-04
.312	7,9	**10106**	HLSP5-05	**10120**	HLSP6-05	**10134**	HLSP7-05	**10148**	HLSP8-05
.375	9,5	**10107**	HLSP5-06	**10121**	HLSP6-06	**10135**	HLSP7-06	**10149**	HLSP8-06
.437	11,1	**10108**	HLSP5-07	**10122**	HLSP6-07	**10136**	HLSP7-07	**10150**	HLSP8-07
.500	12,7	**10109**	HLSP5-08	**10123**	HLSP6-08	**10137**	HLSP7-08	**10151**	HLSP8-08
.625	15,9	**10110**	HLSP5-10	**10124**	HLSP6-10	**10138**	HLSP7-10	**10152**	HLSP8-10
.750	19,1	**10111**	HLSP5-12	**10125**	HLSP6-12	**10139**	HLSP7-12	**10153**	HLSP8-12
.875	22,2	**10112**	HLSP5-14	**10126**	HLSP6-14	**10140**	HLSP7-14	**10154**	HLSP8-14
1.000	25,4	**10113**	HLSP5-16	**10127**	HLSP6-16	**10141**	HLSP7-16	**10155**	HLSP8-16
1.125	28,6	**10114**	HLSP5-18	**10128**	HLSP6-18	**10142**	HLSP7-18	**10156**	HLSP8-18
1.250	31,8	**10115**	HLSP5-20	**10129**	HLSP6-20	**10143**	HLSP7-20	**10157**	HLSP8-20
1.375	34,9	**10116**	HLSP5-22	**10130**	HLSP6-22	**10144**	HLSP7-22	**10158**	HLSP8-22

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.
*Consult Heyco for HLSP5 & HLSP6 in V-0 material.

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

Heyco® Nylon PCB Supports - Imperial Spacing

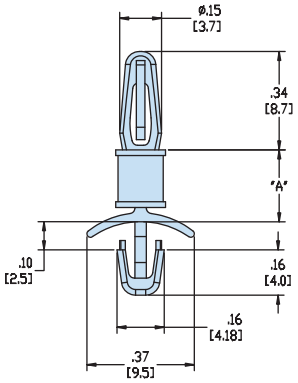

BAYONET SNAP LOCK 8,7 / ARROWHEAD SNAP LOCK

HLSP9

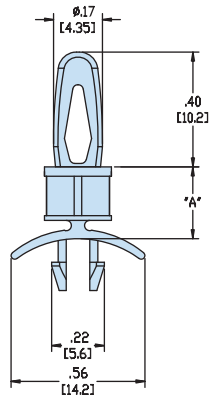

BAYONET SNAP FIT 10,2 / WINGED TWO PRONG SNAP LOCK

HLSP10



BAYONET SNAP LOCK 8,7 / TWO PRONG SNAP LOCK

HLSP11

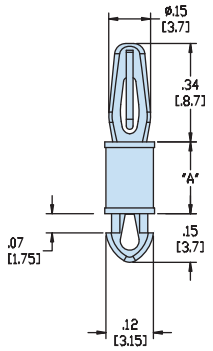

BAYONET SNAP LOCK 8,7 / TEARDROP SNAP LOCK

HTLSP

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.125	3,2	.062	1,6	.157	4,0	.062	1,6	.125	3,2	.062	1,6	.098	2,5
Chassis	.078	2,0	.125	3,2	.078	2,0	.187	4,8	.062	1,6	.125	3,2	.062	1,6	.125	3,2

A		HLSP9		HLSP10		HLSP11		HTLSP	
in.	mm.	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
.125	3,2	**10160**	HLSP9-02			**10178**	HLSP11-02	**10190**	HTLSP-02
.187	4,8	**10161**	HLSP9-03	**10170**	HLSP10-03	**10179**	HLSP11-03	**10191**	HTLSP-03
.250	6,4	**10162**	HLSP9-04	**10171**	HLSP10-04	**10180**	HLSP11-04	**10192**	HTLSP-04
.312	7,9	**10163**	HLSP9-05			**10181**	HLSP11-05	**10193**	HTLSP-05
.375	9,5	**10164**	HLSP9-06	**10172**	HLSP10-06	**10182**	HLSP11-06	**10194**	HTLSP-06
.437	11,1	**10165**	HLSP9-07			**10183**	HLSP11-07	**10195**	HTLSP-07
.500	12,7	**10166**	HLSP9-08	**10173**	HLSP10-08	**10184**	HLSP11-08	**10196**	HTLSP-08
.562	14,3	**10167**	HLSP9-09			**10185**	HLSP11-09		
.625	15,9	**10168**	HLSP9-10	**10174**	HLSP10-10	**10186**	HLSP11-10	**10197**	HTLSP-10
.750	19,1			**10175**	HLSP10-12	**10187**	HLSP11-12		
.875	22,2			**10176**	HLSP10-14	**10188**	HLSP11-14		

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

Quick Specs

Heyco® Nylon PCB Supports - Imperial Spacing



ARROWHEAD SNAP LOCK / ARROWHEAD SNAP LOCK

HDLSP4

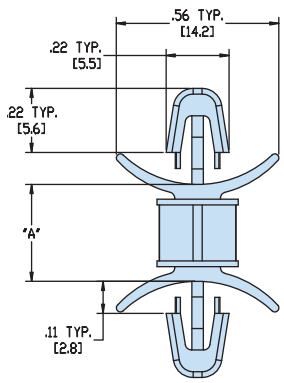

ARROWHEAD SNAP LOCK / ARROWHEAD SNAP LOCK

HDLSP5

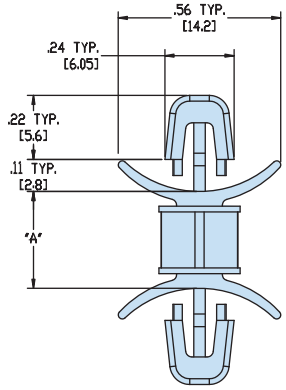

ARROWHEAD SNAP LOCK / ARROWHEAD SNAP LOCK

HDLSP6

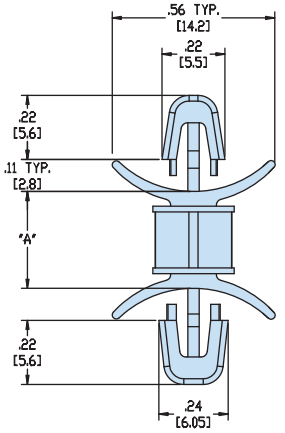

ARROWHEAD SNAP LOCK / ARROWHEAD SNAP LOCK

HDLSP7

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.078	2,0	.125	3,2	.078	2,0	.157	4,0	.078	2,0	.187	4,8	.078	2,0	.157	4,0
Chassis	.078	2,0	.125	3,2	.078	2,0	.157	4,0	.078	2,0	.187	4,8	.078	2,0	.187	4,8

A		HDLSP4		HDLSP5		HDLSP6		HDLSP7	
in.	mm.	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
.187	4,8	**10199**	HDLSP4-03	**10209**	HDLSP5-03	**10217**	HDLSP6-03	**10225**	HDLSP7-03
.250	6,4	**10200**	HDLSP4-04	**10210**	HDLSP5-04	**10218**	HDLSP6-04	**10226**	HDLSP7-04
.312	7,9	**10201**	HDLSP4-05						
.375	9,5	**10202**	HDLSP4-06	**10211**	HDLSP5-06	**10219**	HDLSP6-06	**10227**	HDLSP7-06
.437	11,1	**10203**	HDLSP4-07						
.500	12,7	**10204**	HDLSP4-08	**10212**	HDLSP5-08	**10220**	HDLSP6-08	**10228**	HDLSP7-08
.562	14,3	**10205**	HDLSP4-09						
.625	15,9	**10206**	HDLSP4-10	**10213**	HDLSP5-10	**10221**	HDLSP6-10	**10229**	HDLSP7-10
.750	19,1			**10214**	HDLSP5-12	**10222**	HDLSP6-12	**10230**	HDLSP7-12
.875	22,2	**10207**	HDLSP4-14	**10215**	HDLSP5-14	**10223**	HDLSP6-14	**10231**	HDLSP7-14

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

Heyco® Nylon PCB Supports - Imperial Spacing

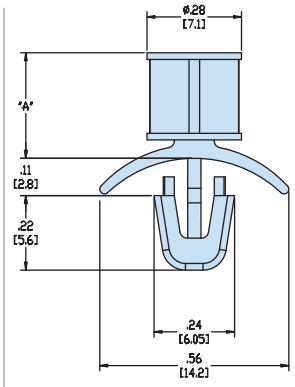

FLAT TOP REST MOUNT / ARROWHEAD LOCK

HPS

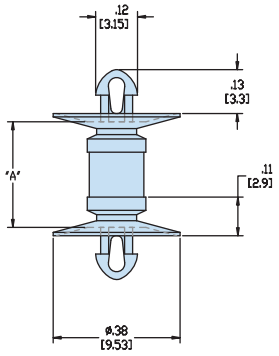

CUPPED TEARDROP / CUPPED TEARDROP

HCDLCBST

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	flat top rest mount				.062	1,6	.098	2,5
Chassis	.078	2,0	.187	4,8	.062	1,6	.098	2,5

A		PART NO. Natural	DESCRIPTION	PART NO. Natural*	DESCRIPTION
in.	mm.				
.187	4,8	**10233**	HPS-03	**10836**	HCDLCBST-03
.250	6,4	**10234**	HPS-04	**10837**	HCDLCBST-04
.312	7,9	**10235**	HPS-05	**10838**	HCDLCBST-05
.375	9,5	**10236**	HPS-06	**10839**	HCDLCBST-06
.437	11,1	**10237**	HPS-07	**10840**	HCDLCBST-07
.500	12,7	**10238**	HPS-08	**10841**	HCDLCBST-08
.562	14,3			**10842**	HCDLCBST-09
.625	15,9	**10239**	HPS-10	**10843**	HCDLCBST-10
.750	19,1	**10240**	HPS-12		
.875	22,2	**10241**	HPS-14		

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

*Consult Heyco for HCDLCBST in V-0 material.

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

Quick Specs

Heyco® Nylon PCB Supports - Imperial Spacing

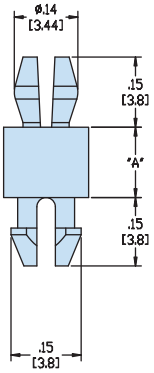

TWO PRONG SNAP FIT /
TWO PRONG SNAP LOCK

HMCBP

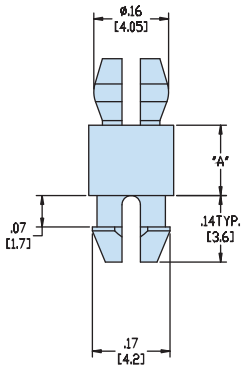

TWO PRONG SNAP FIT /
TWO PRONG SNAP LOCK

HCBP



TWO PRONG SNAP LOCK /
TWO PRONG SNAP LOCK

HMSPDLN



TWO PRONG SNAP LOCK /
TWO PRONG SNAP LOCK

HMSPDL

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.125	3,2	.062	1,6	.153	3,9	.062	1,6	.125	3,2	.062	1,6	.153	3,9
Chassis	.062	1,6	.125	3,2	.062	1,6	.153	3,9	.062	1,6	.125	3,2	.062	1,6	.153	3,9

A		PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
in.	mm.	Natural		Natural		Natural		Natural	
.063	1,6	**10243**	HMCBP-01						
.125	3,2	**10244**	HMCBP-02	**10263**	HCBP-02	**10282**	HMSPDLN-02	**10301**	HMSPDL-02
.187	4,8	**10245**	HMCBP-03	**10264**	HCBP-03	**10283**	HMSPDLN-03	**10302**	HMSPDL-03
.250	6,4	**10246**	HMCBP-04	**10265**	HCBP-04	**10284**	HMSPDLN-04	**10303**	HMSPDL-04
.312	7,9	**10247**	HMCBP-05	**10266**	HCBP-05	**10285**	HMSPDLN-05	**10304**	HMSPDL-05
.375	9,5	**10248**	HMCBP-06	**10267**	HCBP-06	**10286**	HMSPDLN-06	**10305**	HMSPDL-06
.437	11,1	**10249**	HMCBP-07	**10268**	HCBP-07	**10287**	HMSPDLN-07	**10306**	HMSPDL-07
.500	12,7	**10250**	HMCBP-08	**10269**	HCBP-08	**10288**	HMSPDLN-08	**10307**	HMSPDL-08
.562	14,3	**10251**	HMCBP-09	**10270**	HCBP-09	**10289**	HMSPDLN-09	**10308**	HMSPDL-09
.625	15,9	**10252**	HMCBP-10	**10271**	HCBP-10	**10290**	HMSPDLN-10	**10309**	HMSPDL-10
.689	17,5	**10253**	HMCBP-11	**10272**	HCBP-11	**10291**	HMSPDLN-11	**10310**	HMSPDL-11
.750	19,1	**10254**	HMCBP-12	**10273**	HCBP-12	**10292**	HMSPDLN-12	**10311**	HMSPDL-12
.811	20,6	**10255**	HMCBP-13	**10274**	HCBP-13	**10293**	HMSPDLN-13	**10312**	HMSPDL-13
.875	22,2	**10256**	HMCBP-14	**10275**	HCBP-14	**10294**	HMSPDLN-14	**10313**	HMSPDL-14
1.000	25,4	**10257**	HMCBP-16	**10276**	HCBP-16	**10295**	HMSPDLN-16	**10314**	HMSPDL-16
1.125	28,6	**10258**	HMCBP-18	**10277**	HCBP-18	**10296**	HMSPDLN-18	**10315**	HMSPDL-18
1.250	31,8	**10259**	HMCBP-20	**10278**	HCBP-20	**10297**	HMSPDLN-20	**10316**	HMSPDL-20
1.375	34,9	**10260**	HMCBP-22	**10279**	HCBP-22	**10298**	HMSPDLN-22	**10317**	HMSPDL-22
1.500	38,1	**10261**	HMCBP-24	**10280**	HCBP-24	**10299**	HMSPDLN-24	**10318**	HMSPDL-24

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

Heyco® Nylon PCB Supports - Imperial Spacing



FLANGED TWO PRONG SNAP FIT / FLANGED TWO PRONG SNAP LOCK

HMSPS



FLAT TOP REST MOUNT / ARROWHEAD LOCK

HMPS



FLAT TOP REST MOUNT / TEARDROP SNAP LOCK

HPS-TD



TEARDROP SNAP LOCK / TEARDROP SNAP LOCK

HSP-MDL-3

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.157	4,0	flat top rest mount				flat top rest mount				.062	1,6	.098	2,5
Chassis	.062	1,6	.157	4,0	.078	2,0	.125	3,2	.062	1,6	.098	2,5	.039	1,0	.078	2,0

A in.	**A** mm.	**PART NO. Natural**	**DESCRIPTION**	**PART NO. Natural**	**DESCRIPTION**	**PART NO. Natural**	**DESCRIPTION**	**PART NO. Natural**	**DESCRIPTION**
.063	1,6					**10341**	HPS-TD-01	**10352**	HSP-MDL-3-01
.125	3,2			**10331**	HMPS-02	**10342**	HPS-TD-02	**10353**	HSP-MDL-3-02
.187	4,8	**10320**	HMSPS-03	**10332**	HMPS-03	**10343**	HPS-TD-03	**10354**	HSP-MDL-3-03
.250	6,4	**10321**	HMSPS-04	**10333**	HMPS-04	**10344**	HPS-TD-04	**10355**	HSP-MDL-3-04
.312	7,9	**10322**	HMSPS-05	**10334**	HMPS-05	**10345**	HPS-TD-05	**10356**	HSP-MDL-3-05
.375	9,5	**10323**	HMSPS-06	**10335**	HMPS-06	**10346**	HPS-TD-06	**10357**	HSP-MDL-3-06
.437	11,1	**10324**	HMSPS-07	**10336**	HMPS-07	**10347**	HPS-TD-07		
.500	12,7	**10325**	HMSPS-08	**10337**	HMPS-08	**10348**	HPS-TD-08		
.562	14,3			**10338**	HMPS-09	**10349**	HPS-TD-09		
.625	15,9	**10326**	HMSPS-10	**10339**	HMPS-10	**10350**	HPS-TD-10		
.689	17,5	**10327**	HMSPS-11						
.750	19,1	**10328**	HMSPS-12						
.875	22,2	**10329**	HMSPS-14						

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

Quick Specs

Heyco® Nylon PCB Supports - Metric Spacing



TEARDROP SNAP LOCK / TEARDROP SNAP LOCK

HSP-MDL-1



TEARDROP SNAP LOCK / TEARDROP SNAP LOCK

HSP-MDL-2

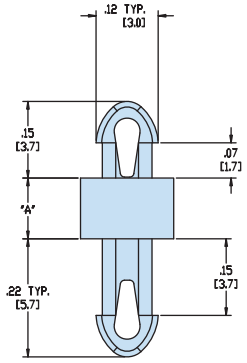

TEARDROP SNAP LOCK / TEARDROP SNAP LOCK

HSP-MDLS-1

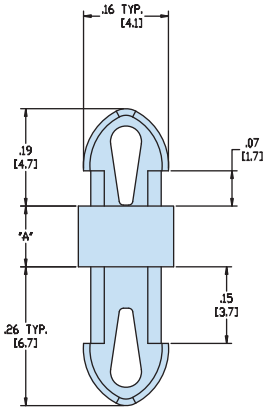

TEARDROP SNAP LOCK / TEARDROP SNAP LOCK

HSP-MDLS-2

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.098	2,5	.062	1,6	.137	3,5	.062	1,6	.098	2,5	.062	1,6	.137	3,5
Chassis	.062	1,6	.098	2,5	.062	1,6	.137	3,5	.141	3,6	.098	2,5	.141	3,6	.137	3,5

A mm.	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
2,0	**10444**	HSP-MDL-1-02M	**10461**	HSP-MDL-2-02M	**10478**	HSP-MDLS-1-02M	**10493**	HSP-MDLS-2-02M
3,0	**10445**	HSP-MDL-1-03M	**10462**	HSP-MDL-2-03M	**10479**	HSP-MDLS-1-03M	**10494**	HSP-MDLS-2-03M
4,0	**10446**	HSP-MDL-1-04M	**10463**	HSP-MDL-2-04M	**10480**	HSP-MDLS-1-04M	**10495**	HSP-MDLS-2-04M
5,0	**10447**	HSP-MDL-1-05M	**10464**	HSP-MDL-2-05M	**10481**	HSP-MDLS-1-05M	**10496**	HSP-MDLS-2-05M
6,0	**10448**	HSP-MDL-1-06M	**10465**	HSP-MDL-2-06M	**10482**	HSP-MDLS-1-06M	**10497**	HSP-MDLS-2-06M
7,0	**10449**	HSP-MDL-1-07M	**10466**	HSP-MDL-2-07M	**10483**	HSP-MDLS-1-07M	**10498**	HSP-MDLS-2-07M
8,0	**10450**	HSP-MDL-1-08M	**10467**	HSP-MDL-2-08M	**10484**	HSP-MDLS-1-08M	**10499**	HSP-MDLS-2-08M
9,0	**10451**	HSP-MDL-1-09M	**10468**	HSP-MDL-2-09M				
10,0	**10452**	HSP-MDL-1-10M	**10469**	HSP-MDL-2-10M	**10485**	HSP-MDLS-1-10M	**10500**	HSP-MDLS-2-10M
12,0	**10453**	HSP-MDL-1-12M	**10470**	HSP-MDL-2-12M	**10486**	HSP-MDLS-1-12M	**10501**	HSP-MDLS-2-12M
14,0	**10454**	HSP-MDL-1-14M	**10471**	HSP-MDL-2-14M	**10487**	HSP-MDLS-1-14M	**10502**	HSP-MDLS-2-14M
16,0	**10455**	HSP-MDL-1-16M	**10472**	HSP-MDL-2-16M	**10488**	HSP-MDLS-1-16M	**10503**	HSP-MDLS-2-16M
18,0	**10456**	HSP-MDL-1-18M	**10473**	HSP-MDL-2-18M	**10489**	HSP-MDLS-1-18M	**10504**	HSP-MDLS-2-18M
20,0	**10457**	HSP-MDL-1-20M	**10474**	HSP-MDL-2-20M	**10490**	HSP-MDLS-1-20M	**10505**	HSP-MDLS-2-20M
22,0	**10458**	HSP-MDL-1-22M	**10475**	HSP-MDL-2-22M	**10491**	HSP-MDLS-1-22M	**10506**	HSP-MDLS-2-22M
26,5	**10459**	HSP-MDL-1-26.5M	**10476**	HSP-MDL-2-26.5M				

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

Heyco® Nylon PCB Supports - Metric Spacing



TEARDROP SNAP LOCK / TWO PRONG SNAP LOCK

HSP-MDL-AH-1



WINGLESS ARROWHEAD LOCK / WINGLESS ARROWHEAD LOCK

HDLSP1



WINGLESS ARROWHEAD LOCK / WINGLESS ARROWHEAD LOCK

HDLSP2

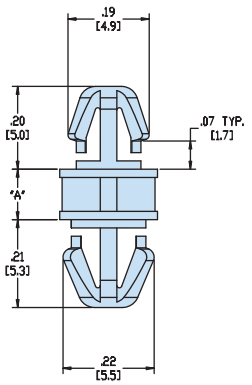

WINGLESS ARROWHEAD LOCK / WINGLESS ARROWHEAD LOCK

HDLSP3

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.098	2,5	.062	1,6	.157	4,0	.062	1,6	.187	4,8	.062	1,6	.157	4,0
Chassis	.062	1,6	.098	2,5	.062	1,6	.157	4,0	.062	1,6	.187	4,8	.062	1,6	.187	4,8

A mm.	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
2,0	**10508**	HSP-MDL-AH-1-02M						
3,0	**10509**	HSP-MDL-AH-1-03M	**10523**	HDLSP1-03M	**10533**	HDLSP2-03M	**10543**	HDLSP3-03M
4,0	**10510**	HSP-MDL-AH-1-04M	**10524**	HDLSP1-04M	**10534**	HDLSP2-04M	**10544**	HDLSP3-04M
5,0	**10511**	HSP-MDL-AH-1-05M						
6,0	**10512**	HSP-MDL-AH-1-06M	**10525**	HDLSP1-06M	**10535**	HDLSP2-06M	**10545**	HDLSP3-06M
7,0	**10513**	HSP-MDL-AH-1-07M						
8,0	**10514**	HSP-MDL-AH-1-08M	**10526**	HDLSP1-08M	**10536**	HDLSP2-08M	**10546**	HDLSP3-08M
10,0	**10515**	HSP-MDL-AH-1-10M	**10527**	HDLSP1-10M	**10537**	HDLSP2-10M	**10547**	HDLSP3-10M
12,0	**10516**	HSP-MDL-AH-1-12M	**10528**	HDLSP1-12M	**10538**	HDLSP2-12M	**10548**	HDLSP3-12M
14,0	**10517**	HSP-MDL-AH-1-14M	**10529**	HDLSP1-14M	**10539**	HDLSP2-14M	**10549**	HDLSP3-14M
16,0	**10518**	HSP-MDL-AH-1-16M	**10530**	HDLSP1-16M	**10540**	HDLSP2-16M	**10550**	HDLSP3-16M
18,0	**10519**	HSP-MDL-AH-1-18M	**10531**	HDLSP1-18M	**10541**	HDLSP2-18M	**10551**	HDLSP3-18M
20,0	**10520**	HSP-MDL-AH-1-20M						
22,0	**10521**	HSP-MDL-AH-1-22M						

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

Quick Specs

Heyco® Nylon PCB Supports - Reverse Locking

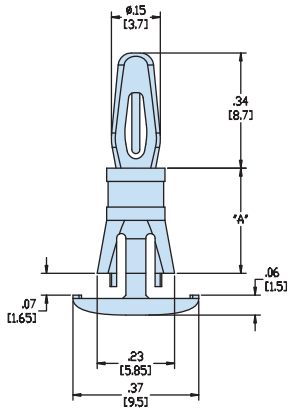

BAYONET SNAP LOCK 8,7 / REVERSE BUTTON LOCK

HLCBSC2



FLAT TOP REST MOUNT / REVERSE BUTTON LOCK

HLCBSC3

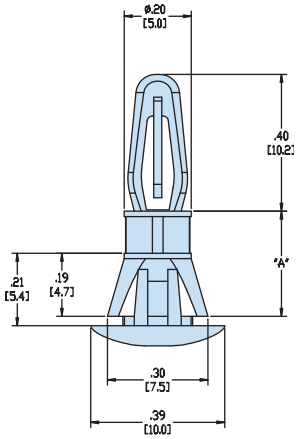

BAYONET SNAP LOCK 10,2 / REVERSE BUTTON LOCK

HLCBSC4

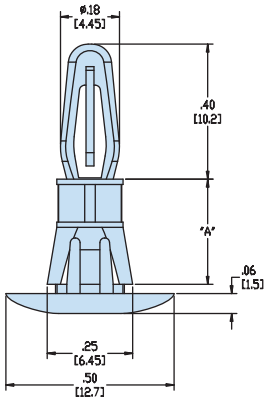

BAYONET SNAP LOCK 10,2 / REVERSE BUTTON LOCK

HLCBSC5

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.125	3,2	flat top rest mount				.062	1,6	.157	4,0	.062	1,6	.157	4,0
Chassis	.062	1,6	.187	4,8	.062	1,6	.187	4,8	.047	1,2	.236	6,0	.078	2,0	.212	5,4

A in.	**A** mm.	**PART NO. Natural**	**DESCRIPTION**	**PART NO. Natural**	**DESCRIPTION**	**PART NO. Natural**	**DESCRIPTION**	**PART NO. Natural**	**DESCRIPTION**
.187	4,8					**10375**	HLCBSC4-03		
.250	6,4	**10359**	HLCBSC2-04	**10367**	HLCBSC3-04	**10376**	HLCBSC4-04	**10382**	HLCBSC5-04
.312	7,9	**10360**	HLCBSC2-05	**10368**	HLCBSC3-05	**10377**	HLCBSC4-05		
.375	9,5	**10361**	HLCBSC2-06	**10369**	HLCBSC3-06	**10378**	HLCBSC4-06	**10383**	HLCBSC5-06
.437	11,1	**10362**	HLCBSC2-07	**10370**	HLCBSC3-07				
.500	12,7	**10363**	HLCBSC2-08	**10371**	HLCBSC3-08	**10379**	HLCBSC4-08	**10384**	HLCBSC5-08
.562	14,3	**10364**	HLCBSC2-09	**10372**	HLCBSC3-09				
.625	15,9	**10365**	HLCBSC2-10	**10373**	HLCBSC3-10	**10381**	HLCBSC4-10	**10385**	HLCBSC5-10
.750	19,1					**10380**	HLCBSC4-12		

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

Heyco® Nylon PCB Supports - Reverse Locking

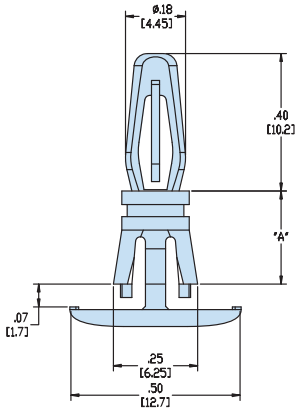

BAYONET SNAP LOCK 10,2 / REVERSE BUTTON LOCK

HLCBSC6

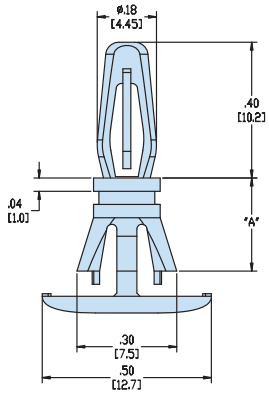

BAYONET SNAP LOCK 10,2 / REVERSE BUTTON LOCK

HLCBSC7



TWO PRONG SNAP LOCK / REVERSE BUTTON LOCK

HLCBSC8

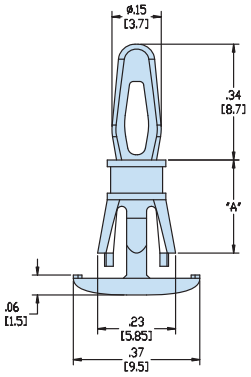

BAYONET SNAP FIT 8,7 / REVERSE BUTTON LOCK

HLCBSC9

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.157	4,0	.062	1,6	.157	4,0	.062	1,6	.125	3,2	.062	1,6	.125	3,2
Chassis	.065	1,7	.212	5,4	.065	1,7	.250	6,4	.062	1,6	.187	4,8	.062	1,6	.187	4,8

A		PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
in.	mm.	Natural		Natural		Natural		Natural	
.250	6,4	**10387**	HLCBSC6-04	**10392**	HLCBSC7-04	**10397**	HLCBSC8-04	**10405**	HLCBSC9-04
.312	7,9					**10398**	HLCBSC8-05	**10406**	HLCBSC9-05
.375	9,5	**10388**	HLCBSC6-06	**10393**	HLCBSC7-06	**10399**	HLCBSC8-06	**10407**	HLCBSC9-06
.437	11,1					**10400**	HLCBSC8-07	**10408**	HLCBSC9-07
.500	12,7	**10389**	HLCBSC6-08	**10394**	HLCBSC7-08	**10401**	HLCBSC8-08	**10409**	HLCBSC9-08
.562	14,3					**10402**	HLCBSC8-09	**10410**	HLCBSC9-09
.625	15,9	**10390**	HLCBSC6-10	**10395**	HLCBSC7-10	**10403**	HLCBSC8-10	**10411**	HLCBSC9-10

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

Quick Specs

Heyco® Nylon PCB Supports - Reverse Locking



FLAT TOP REST MOUNT / REVERSE BUTTON LOCK

HLCBSC11

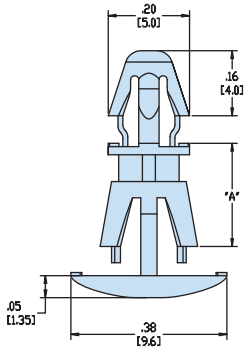

ARROWHEAD SNAP LOCK / REVERSE BUTTON LOCK

HLCBSC12-2

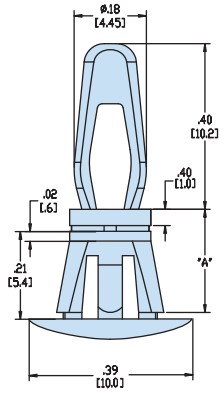

BAYONET SNAP FIT 10,2 / REVERSE BUTTON LOCK

HLCBSC13

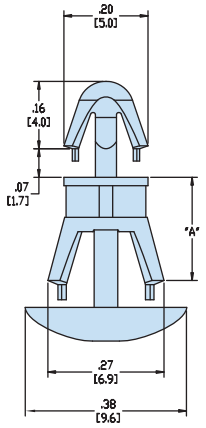

ARROWHEAD LOCK / REVERSE BUTTON LOCK

HCPS

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	flat top rest mount				.062	1,6	.157	4,0	.062	1,6	.157	4,0	.062	1,6	.157	4,0
Chassis	.062	1,6	.212	5,4	.078	2,0	.212	5,4	.047	1,2	.236	6,0	.062	1,6	.216	5,5

A in.	**A** mm.	**PART NO. Natural***	**DESCRIPTION**	**PART NO. Natural**	**DESCRIPTION**	**PART NO. Natural**	**DESCRIPTION**	**PART NO. Natural**	**DESCRIPTION**
.187	4,8					**10426**	HLCBSC13-03		
.250	6,4					**10427**	HLCBSC13-04		
.312	7,9					**10428**	HLCBSC13-05	**10845**	HCPS-05
.375	9,5	**10413**	HLCBSC11-06	**10420**	HLCBSC12-2-06	**10429**	HLCBSC13-06	**10846**	HCPS-06
.488	12,4	**10414**	HLCBSC11-7.8						
.500	12,7	**10415**	HLCBSC11-08	**10421**	HLCBSC12-2-08	**10430**	HLCBSC13-08	**10847**	HCPS-08
.625	15,9	**10416**	HLCBSC11-10	**10422**	HLCBSC12-2-10			**10848**	HCPS-10
.750	19,1	**10417**	HLCBSC11-12	**10423**	HLCBSC12-2-12	**10431**	HLCBSC13-12	**10849**	HCPS-12
.875	22,2	**10418**	HLCBSC11-14	**10424**	HLCBSC12-2-14			**10850**	HCPS-14
1.000	25,4							**10851**	HCPS-16
1.125	28,6							**10852**	HCPS-18
1.250	31,8							**10853**	HCPS-20
1.375	34,9							**10854**	HCPS-22
1.500	38,1							**10855**	HCPS-24

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.
*Consult Heyco for HLCBSC11 in V-0 material.

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

Heyco® Nylon PCB Supports - Metric Reverse Locking

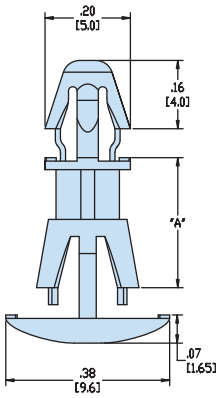

ARROWHEAD SNAP LOCK / REVERSE BUTTON LOCK

HLCBSC

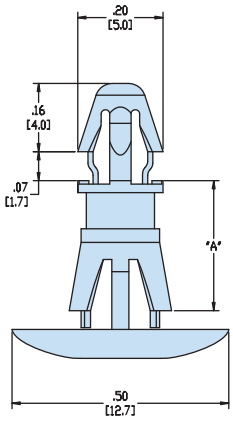

ARROWHEAD SNAP LOCK / REVERSE BUTTON LOCK

HLCBSC10



	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.157	4,0	.062	1,6	.157	4,0
Chassis	.062	1,6	.212	5,4	.062	1,6	.212	5,4

A mm.	**PART NO. Natural**	**DESCRIPTION**	**PART NO. Natural**	**DESCRIPTION**
6,0	**10433**	HLCBSC-06M		
8,0	**10434**	HLCBSC-08M	**10439**	HLCBSC10-08M
10,0	**10435**	HLCBSC-10M	**10440**	HLCBSC10-10M
12,0	**10436**	HLCBSC-12M	**10441**	HLCBSC10-12M
14,0	**10437**	HLCBSC-14M	**10442**	HLCBSC10-14M

Standard color natural. For special order parts in UL 94V-0 material, add the suffix "F" to Part No.

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

Quick Specs

Heyco® Nylon PCB Supports - Blind Mount

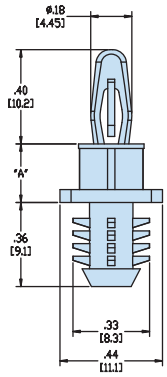

BAYONET SNAP LOCK 10,2 / BLIND FIR TREE

HBS

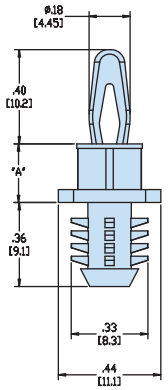

BAYONET SNAP FIT 10,2 / BLIND FIR TREE

HBS2

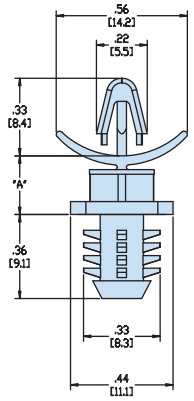

ARROWHEAD SNAP LOCK / BLIND FIR TREE

HBS3

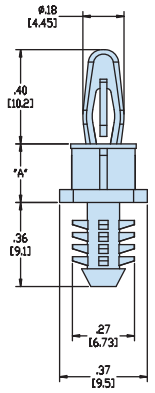

BAYONET SNAP LOCK 10,2 / BLIND FIR TREE

HBS4

	HBS				HBS2				HBS3				HBS4			
	Minimum Thickness		Mounting Hole Diameter		Minimum Thickness		Mounting Hole Diameter		Minimum Thickness		Mounting Hole Diameter		Minimum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.157	4,0	.062	1,6	.157	4,0	.078	2,0	.157	4,0	.062	1,6	.157	4,0
Chassis	.250	6,4	.312	7,9	.250	6,4	.312	7,9	.250	6,4	.312	7,9	.250	6,4	.250	6,4

A		HBS		HBS2		HBS3		HBS4	
in.	mm.	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
.187	4,8	**10553**	HBS-03	**10562**	HBS2-03			**10578**	HBS4-03
.250	6,4	**10554**	HBS-04	**10563**	HBS2-04	**10571**	HBS3-04	**10579**	HBS4-04
.375	9,5	**10555**	HBS-06	**10564**	HBS2-06	**10572**	HBS3-06	**10580**	HBS4-06
.437	11,1	**10556**	HBS-07	**10565**	HBS2-07			**10581**	HBS4-07
.500	12,7	**10557**	HBS-08	**10566**	HBS2-08	**10573**	HBS3-08	**10582**	HBS4-08
.625	15,9	**10558**	HBS-10	**10567**	HBS2-10	**10574**	HBS3-10	**10583**	HBS4-10
.750	19,1	**10559**	HBS-12	**10568**	HBS2-12	**10575**	HBS3-12	**10584**	HBS4-12
.875	22,2	**10560**	HBS-14	**10569**	HBS2-14	**10576**	HBS3-14	**10585**	HBS4-14

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

Heyco® Nylon PCB Supports - Blind, Key Slot & Rivet Mount

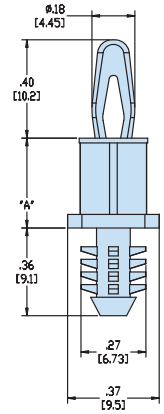

BAYONET SNAP FIT 10,2 / BLIND FIR TREE

HBS5

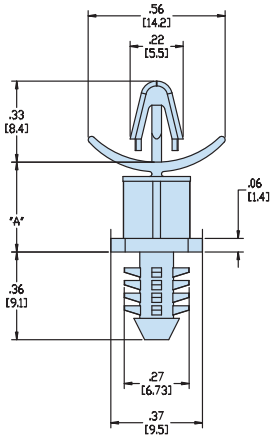

ARROWHEAD SNAP LOCK / BLIND FIR TREE

HBS6

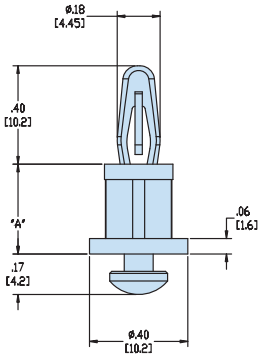

BAYONET SNAP LOCK 10,2 / KEY SLOT BUTTON

HKSLBN - Key Slot



BAYONET SNAP LOCK 10,2 / RIVET

HRLSP - Rivet

	HBS5				HBS6				HKSLBN - Key Slot				HRLSP - Rivet			
	Minimum Thickness		Mounting Hole Diameter		Minimum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Slot Width		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.157	4,0	.078	2,0	.157	4,0	.062	1,6	.157	4,0	.062	1,6	.157	4,0
Chassis	.250	6,4	.250	6,4	.250	6,4	.250	6,4	.062	1,6	see diagram		see table		.165	4,2

A		HBS5		HBS6		HKSLBN - Key Slot		HRLSP - Rivet	
in.	mm.	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
.125	3,2					**10611**	HKSLBN-02		
.187	4,8	**10587**	HBS5-03						
.250	6,4	**10588**	HBS5-04	**10596**	HBS6-04	**10612**	HKSLBN-04		
.375	9,5	**10589**	HBS5-06	**10597**	HBS6-06	**10613**	HKSLBN-06	**10603**	HRLSP-06
.437	11,1	**10590**	HBS5-07					**10604**	HRLSP-07
.500	12,7	**10591**	HBS5-08	**10598**	HBS6-08	**10614**	HKSLBN-08	**10605**	HRLSP-08
.625	15,9	**10592**	HBS5-10	**10599**	HBS6-10			**10606**	HRLSP-10
.750	19,1	**10593**	HBS5-12	**10600**	HBS6-12			**10607**	HRLSP-12
.875	22,2	**10594**	HBS5-14	**10601**	HBS6-14			**10608**	HRLSP-14
1.000	25,4							**10609**	HRLSP-16

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.



RECOMMENDED PANEL CUT-OUT FOR HKSLBN

Rivet Table for HRLSP		
PART NO. Black	PANEL THICKNESS in.	mm.
9058	.03 - .06	0,7 - 1,6
9060	.06 - .11	1,6 - 2,7
9062	.11 - .15	2,7 - 3,7
9064	.15 - .19	3,7 - 4,7
9068	.22 - .26	5,7 - 6,7

Rivet applied from Chassis side.

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

Quick Specs

Heyco® Nylon PCB Supports - Stackable Self-Retaining Spacers

- May be stacked for multi-level PCB applications.
- Self aligning.
- One end locks into PCB.
- Clear hole variations for #4, #6 or #8 screw.

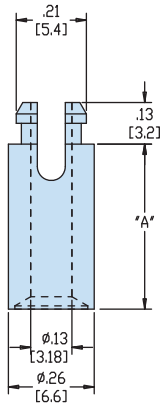

TWO PRONG SNAP LOCK / #4 SELF-TAPPING SCREW

HSSRS4

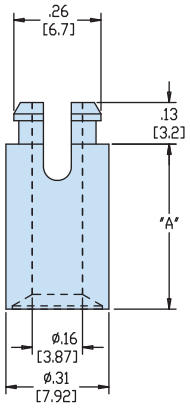

TWO PRONG SNAP LOCK / #6 SELF-TAPPING SCREW

HSSRS6

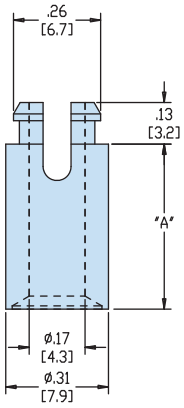

TWO PRONG SNAP LOCK / #8 SELF-TAPPING SCREW

HSSRS8

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.187	4,7	.062	1,6	.232	5,9	.062	1,6	.232	5,9
Chassis	self-tapping		#4		self-tapping		#6		self-tapping		#8	M4

A in.	**A** mm.	**PART NO. FR Natural**	**DESCRIPTION**	**PART NO. FR Natural**	**DESCRIPTION**	**PART NO. Natural***	**DESCRIPTION**
.125	3,2	**3681**	HSSRS4-02				
.187	4,8	**3683**	HSSRS4-03				
.250	6,4	**3684**	HSSRS4-04	**3689**	HSSRS6-04	**10857**	HSSRS8-04
.312	7,9					**10858**	HSSRS8-05
.375	9,5	**3685**	HSSRS4-06	**3690**	HSSRS6-06	**10859**	HSSRS8-06
.437	11,1					**10860**	HSSRS8-07
.500	12,7	**3687**	HSSRS4-08	**3691**	HSSRS6-08	**10861**	HSSRS8-08
.625	15,9	**3688**	HSSRS4-10	**3692**	HSSRS6-10	**10862**	HSSRS8-10
.750	19,1					**10863**	HSSRS8-12
.875	22,2					**10864**	HSSRS8-14
1.000	25,4					**10865**	HSSRS8-16

Standard material is FR natural.

*HSSRS8 standard material is UL 94V-2 natural.

Quick Specs

Material	Nylon 6/6
Flammability Rating	HSSRS4 & HSSRS6 - 94V-0; HSSRS8 - 94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

Heyco® Nylon PCB Supports - Thru Hole Self-Retaining Spacers

- Large surface area base will not deform under heavy pre-load.
- One end locks into PCB.
- Clear hole variations for #4, #6 or #8 screw.

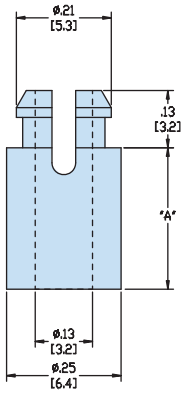

TWO PRONG SNAP LOCK / #4 or M3 SELF-TAPPING SCREW

HSRS4

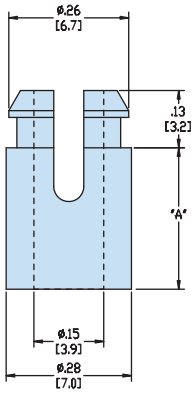

TWO PRONG SNAP LOCK / #6 or M3 SELF-TAPPING SCREW

HSRS6

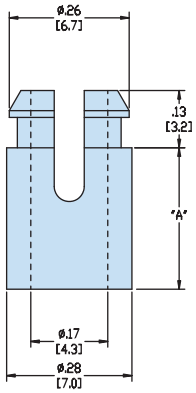

TWO PRONG SNAP LOCK / #8 or M4 SELF-TAPPING SCREW

HSRS8

	Maximum Thickness †		Mounting Hole Diameter		Maximum Thickness †		Mounting Hole Diameter		Maximum Thickness †		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.187	4,7	.062	1,6	.232	5,9	.062	1,6	.232	5,9
Chassis	self-tapping			M3	self-tapping			M3	self-tapping			M4

A		PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
in.	mm.						
.125	3,2	**10627**	HSRS4-02				
.187	4,8	**10628**	HSRS4-03				
.250	6,4	**10629**	HSRS4-04	**10639**	HSRS6-04	**10649**	HSRS8-04
.312	7,9	**10630**	HSRS4-05	**10640**	HSRS6-05	**10650**	HSRS8-05
.375	9,5	**10631**	HSRS4-06	**10641**	HSRS6-06	**10651**	HSRS8-06
.437	11,1	**10632**	HSRS4-07	**10642**	HSRS6-07	**10652**	HSRS8-07
.500	12,7	**10633**	HSRS4-08	**10643**	HSRS6-08	**10653**	HSRS8-08
.625	15,9	**10634**	HSRS4-10	**10644**	HSRS6-10	**10654**	HSRS8-10
.750	19,1	**10635**	HSRS4-12	**10645**	HSRS6-12	**10655**	HSRS8-12
.875	22,2	**10636**	HSRS4-14	**10646**	HSRS6-14	**10656**	HSRS8-14
1.000	25,4	**10637**	HSRS4-16	**10647**	HSRS6-16	**10657**	HSRS8-16

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

†Thread depth at Chassis end. For HSRS4, -6 and -8, thread depth = "A" dimension

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

Quick Specs

Heyco® Nylon PCB Supports - Screw and Lock



BAYONET SNAP LOCK 10,2 / 6-32 SELF-TAPPING SCREW

HHCBS

	Maximum Thickness*		Mounting Hole Diameter	
	in.	mm.	in.	mm.
PCB	.062	1,6	.157	4,0
Chassis	.312	7,9	6-32	

A		PART NO.	DESCRIPTION
in.	mm.	Natural	
.250	6,4	**10616**	HHCBS-04 †
.375	9,5	**10617**	HHCBS-06
.500	12,7	**10618**	HHCBS-08
.625	15,9	**10619**	HHCBS-10
.750	19,1	**10620**	HHCBS-12
.875	22,2	**10621**	HHCBS-14
1.000	25,4	**10622**	HHCBS-16
1.125	28,6	**10623**	HHCBS-18
1.250	31,8	**10624**	HHCBS-20
1.406	35,7	**10625**	HHCBS-22.5



BAYONET SNAP LOCK 10,2 / M4 THREADED FEMALE

HLCBS-TF

	Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.
PCB	.062	1,6	.157	4,0
Chassis	threaded			M4

PART NO.	DESCRIPTION
Natural**	
10829	HLCBS-TF-M4-06
10830	HLCBS-TF-M4-08
10831	HLCBS-TF-M4-10
10832	HLCBS-TF-M4-12
10833	HLCBS-TF-M4-14
10834	HLCBS-TF-M4-16

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

*Refers to thread depth at chassis which is .312˝ (7,9 mm)

**Consult Heyco for HLCBS-TF in V-0 material

†Thread depth is .20˝ (5,2 mm)



BAYONET SNAP LOCK 9,5 / METRIC THREADED FEMALE

HTCBS Series

	Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.
PCB	varies		.157	4,0
Chassis	screw*			M3, M4

A	T	PART NO.	DESCRIPTION
mm.	mm.	Black	
HTCBS-M3-6 mm Hex			
8,0	1,6	**10659**	HTCBS-M3-6-8
10,0	1,6	**10660**	HTCBS-M3-6-10
15,0	1,6	**10661**	HTCBS-M3-6-15
20,0	1,7	**10662**	HTCBS-M3-6-20
HTCBS-M3-8 mm Hex			
8,0	1,6	**10664**	HTCBS-M3-8-8
23,0	1,6	**10665**	HTCBS-M3-8-23
HTCBS-M4-8 mm Hex			
10,0	1,6	**10667**	HTCBS-M4-8-10
12,0	1,7	**10668**	HTCBS-M4-8-12
15,0	1,6	**10669**	HTCBS-M4-8-15
30,0	1,6	**10670**	HTCBS-M4-8-30-16
	1,7	**10671**	HTCBS-M4-8-30-17
	2,1	**10672**	HTCBS-M4-8-30-21
35,0	2,1	**10673**	HTCBS-M4-8-35
70,0	1,6	**10674**	HTCBS-M4-8-70

Standard color black.

*Shoulder and thread depths vary, consult Heyco.

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

Heyco® Nylon PCB Supports - Threaded Male

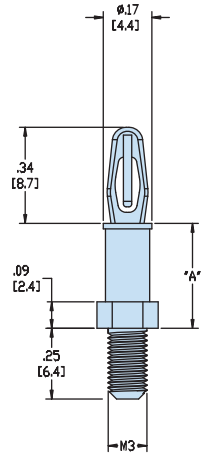

BAYONET SNAP LOCK 8,7 / M3 MALE THREAD

HSCBS3

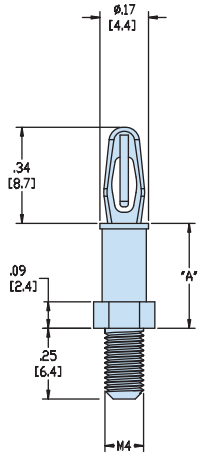

BAYONET SNAP LOCK 8,7 / M4 MALE THREAD

HSCBS4

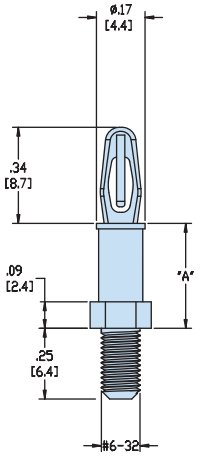

BAYONET SNAP LOCK 8,7 / 6-32 MALE THREAD

HSCBS5

	Maximum Thread Lg †		Mounting Hole Diameter		Maximum Thread Lg †		Mounting Hole Diameter		Maximum Thread Lg †		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.125	3,2	.062	1,6	.125	3,2	.062	1,6	.125	3,2
Chassis	.250	6,4		M3	.250	6,4		M4	.250	6,4	6-32	

A		PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
in.	mm.						
.125	3,2	**10716**	HSCBS3-02	**10726**	HSCBS4-02	**10736**	HSCBS5-02
.187	4,8	**10717**	HSCBS3-03	**10727**	HSCBS4-03	**10737**	HSCBS5-03
.250	6,4	**10718**	HSCBS3-04	**10728**	HSCBS4-04	**10738**	HSCBS5-04
.312	7,9	**10719**	HSCBS3-05	**10729**	HSCBS4-05	**10739**	HSCBS5-05
.375	9,5	**10720**	HSCBS3-06	**10730**	HSCBS4-06	**10740**	HSCBS5-06
.437	11,1	**10721**	HSCBS3-07	**10731**	HSCBS4-07	**10741**	HSCBS5-07
.500	12,7	**10722**	HSCBS3-08	**10732**	HSCBS4-08	**10742**	HSCBS5-08
.562	14,3	**10723**	HSCBS3-09	**10733**	HSCBS4-09	**10743**	HSCBS5-09
.625	15,9	**10724**	HSCBS3-10	**10734**	HSCBS4-10	**10744**	HSCBS5-10

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

†Thread length at Chassis

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

Quick Specs

Heyco® Nylon PCB Supports - Threaded Male



BAYONET SNAP LOCK 10,2 / 6-32 MALE THREAD

HSCBS6



BAYONET SNAP LOCK 10,2 / M4 MALE THREAD

HSCBS7

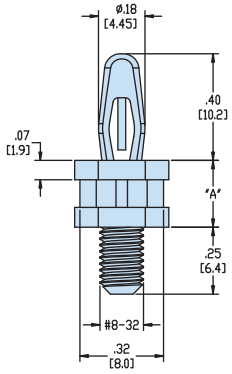

BAYONET SNAP LOCK 10,2 / 8-32 MALE THREAD

HSCBS8



BAYONET SNAP LOCK 10,2 / M4 MALE THREAD

HSCBS

	Maximum Thread Lg †		Mounting Hole Diameter		Maximum Thread Lg †		Mounting Hole Diameter		Maximum Thread Lg †		Mounting Hole Diameter		Maximum Thread Lg †		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.157	4,0	.062	1,6	.157	4,0	.062	1,6	.157	4,0	.062	1,6	.157	4,0
Chassis	.300	7,6	6-32		.300	7,6		M4	.250	6,4	8-32		.250	6,4		M4

A		PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
in.	mm.								
.250	6,4	**10746**	HSCBS6-04	**10754**	HSCBS7-04	**10762**	HSCBS8-04	**10678**	HSCBS-04
.375	9,5	**10747**	HSCBS6-06	**10755**	HSCBS7-06	**10763**	HSCBS8-06	**10679**	HSCBS-06
.500	12,7	**10748**	HSCBS6-08	**10756**	HSCBS7-08	**10764**	HSCBS8-08	**10680**	HSCBS-08
.625	15,9	**10749**	HSCBS6-10	**10757**	HSCBS7-10	**10765**	HSCBS8-10	**10681**	HSCBS-10
.750	19,1	**10750**	HSCBS6-12	**10758**	HSCBS7-12	**10766**	HSCBS8-12	**10682**	HSCBS-12
.812	20,6							**10683**	HSCBS-13
.875	22,2	**10751**	HSCBS6-14	**10759**	HSCBS7-14	**10767**	HSCBS8-14	**10684**	HSCBS-14
1.000	25,4	**10752**	HSCBS6-16	**10760**	HSCBS7-16	**10768**	HSCBS8-16	**10685**	HSCBS-16
1.125	28,6					**10769**	HSCBS8-18	**10686**	HSCBS-18
1.406	35,7					**10770**	HSCBS8-22.5	**10687**	HSCBS-22.5

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

†Thread length at Chassis

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

Heyco® Nylon PCB Supports - Threaded Male

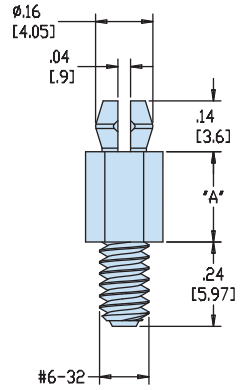

TWO PRONG SNAP FIT / 6-32 MALE THREAD

HSCBS1-632

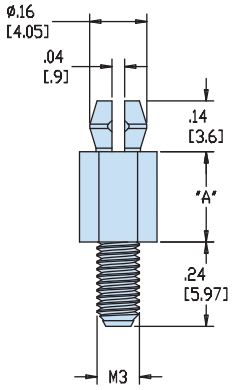

TWO PRONG SNAP FIT / M3 MALE THREAD

HSCBS1-M3

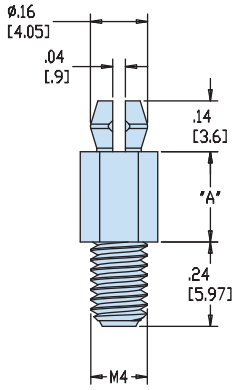

TWO PRONG SNAP FIT / M4 MALE THREAD

HSCBS1-M4

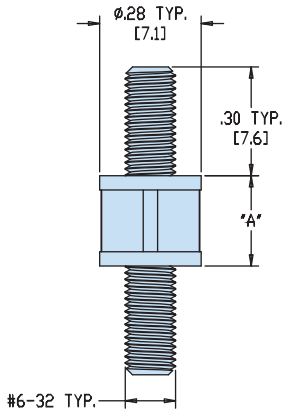

6-32 MALE THREAD / 6-32 MALE THREAD

HCBS-TMM

	HSCBS1-632				HSCBS1-M3				HSCBS1-M4				HCBS-TMM			
	Maximum Thread Lg †		Mounting Hole Diameter		Maximum Thread Lg †		Mounting Hole Diameter		Maximum Thread Lg †		Mounting Hole Diameter		Maximum Thread Lg †		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.153	3,9	.062	1,6	.153	3,9	.062	1,6	.153	3,9	.300	7,6	6-32	
Chassis	.236	6,0	6-32		.236	6,0		M3	.236	6,0		M4	.300	7,6	6-32	

A		PART NO. Natural	DESCRIPTION	PART NO. Natural*	DESCRIPTION	PART NO. Natural*	DESCRIPTION	PART NO. Natural	DESCRIPTION
in.	mm.								
.125	3,2	**10689**	HSCBS1-632-02	**10698**	HSCBS1-M3-02	**10707**	HSCBS1-M4-02		
.187	4,8	**10690**	HSCBS1-632-03	**10699**	HSCBS1-M3-03	**10708**	HSCBS1-M4-03		
.250	6,4	**10691**	HSCBS1-632-04	**10700**	HSCBS1-M3-04	**10709**	HSCBS1-M4-04	**10817**	HCBS-TMM-04
.375	9,5	**10692**	HSCBS1-632-06	**10701**	HSCBS1-M3-06	**10710**	HSCBS1-M4-06	**10818**	HCBS-TMM-06
.500	12,7	**10693**	HSCBS1-632-08	**10702**	HSCBS1-M3-08	**10711**	HSCBS1-M4-08	**10819**	HCBS-TMM-08
.625	15,9	**10694**	HSCBS1-632-10	**10703**	HSCBS1-M3-10	**10712**	HSCBS1-M4-10	**10820**	HCBS-TMM-10
.750	19,1	**10695**	HSCBS1-632-12	**10704**	HSCBS1-M3-12	**10713**	HSCBS1-M4-12	**10821**	HCBS-TMM-12
.875	22,2	**10696**	HSCBS1-632-14	**10705**	HSCBS1-M3-14	**10714**	HSCBS1-M4-14	**10822**	HCBS-TMM-14
1.000	25,4							**10823**	HCBS-TMM-16

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

*Consult Heyco for HSCBS1-M3 and HSCBS1-M4 in V-0 material.

†Thread length at Chassis (and at PCB for HCBS-TMM)

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

Quick Specs

Heyco® Nylon PCB Supports - Adhesive-Back Mount

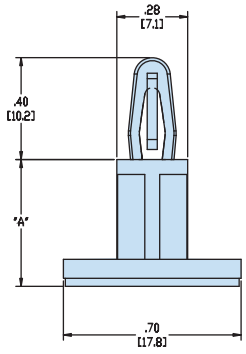

BAYONET SNAP LOCK 10,2 / ADHESIVE-BACK BASE 17,8 sq

HCBS

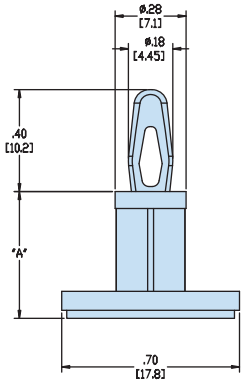

BAYONET SNAP FIT 10,2 / ADHESIVE-BACK BASE 17,8 sq

HCBS2

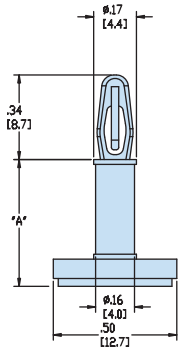

BAYONET SNAP LOCK 8,7 / ADHESIVE-BACK BASE 12,7 sq

HCBS3



TEARDROP SNAP LOCK / ADHESIVE-BACK BASE 12,7 sq

HCBS4

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.157	4,0	.062	1,6	.157	4,0	.062	1,6	.125	3,2	.062	1,6	.098	2,5
Chassis	adhesive-back mount				adhesive-back mount				adhesive-back mount				adhesive-back mount			

A		PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
in.	mm.	Natural		Natural		Natural		Natural	
.187	4,8	**10772**	HCBS-03-AB	**10784**	HCBS2-03-AB	**10794**	HCBS3-03-AB	**10803**	HCBS4-03-AB
.250	6,4	**10773**	HCBS-04-AB	**10785**	HCBS2-04-AB	**10795**	HCBS3-04-AB	**10804**	HCBS4-04-AB
.312	7,9					**10796**	HCBS3-05-AB		
.375	9,5	**10774**	HCBS-06-AB	**10786**	HCBS2-06-AB	**10797**	HCBS3-06-AB	**10805**	HCBS4-06-AB
.437	11,1					**10798**	HCBSC-07-AB	**10806**	HCBS4-07-AB
.500	12,7	**10775**	HCBS-08-AB	**10787**	HCBS2-08-AB	**10799**	HCBS3-08-AB	**10807**	HCBS4-08-AB
.562	14,3					**10800**	HCBS3-09-AB		
.625	15,9	**10776**	HCBS-10-AB	**10788**	HCBS2-10-AB	**10801**	HCBS3-10-AB	**10808**	HCBS4-10-AB
.750	19,1	**10777**	HCBS-12-AB	**10789**	HCBS2-12-AB				
.875	22,2	**10778**	HCBS-14-AB	**10790**	HCBS2-14-AB				
1.000	25,4	**10779**	HCBS-16-AB	**10791**	HCBS2-16-AB				
1.125	28,6	**10780**	HCBS-18-AB	**10792**	HCBS2-18-AB				

Standard color natural.

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

Heyco® Nylon PCB Supports - Adhesive-Back Mount and Edge Holding



BAYONET SNAP LOCK 10,2 / ADHESIVE-BACK BASE 17,8 sq

HCBS-Metric



FLAT TOP REST MOUNT / ADHESIVE-BACK BASE 17,8 sq

HPSB

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.157	4,0	flat top rest mount			
Chassis	adhesive-back mount				adhesive-back mount			

A mm.	**PART NO. Natural**	**DESCRIPTION**	**PART NO. Natural V-0**	**DESCRIPTION**
6,0			**10810F**	HPSB-06M-AB
8,0	**10781**	HCBS-08M-AB	**10811F**	HPSB-08M-AB
10,0	**10782**	HCBS-10M-AB	**10812F**	HPSB-10M-AB
12,0			**10813F**	HPSB-12M-AB
14,0			**10814F**	HPSB-14M-AB
16,0			**10815F**	HPSB-16M-AB

Standard color natural. *For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No. Note: Consult Heyco for HCBS in V-0 material. V-0 material is standard for HPSB series parts.





EDGE SNAP LOCK / #6 SELF-TAPPING SCREW

HTEHCBS

	Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.
PCB	.062	1,6	.157	4,0
Chassis	Varies		#6 Screw	

A in.	**A** mm.	**PART NO. Natural***	**DESCRIPTION**
.250	6,4	**10935**	HTEHCBS-04
.312	7,9	**10936**	HTEHCBS-05
.375	9,5	**10937**	HTEHCBS-06
.500	12,7	**10939**	HTEHCBS-08
.625	15,9	**10941**	HTEHCBS-10
.750	19,1	**10942**	HTEHCBS-12
.875	22,2	**10943**	HTEHCBS-14
1.000	25,4	**10944**	HTEHCBS-16

- Long nose facilitates alignment of components on board with the mating parts on the chassis.
- PCB is easy to remove for service.

Material	Nylon 6/6
Flammability Rating	HPSB - 94V-0; all others 94V-2
Temperature Range	.4°F (-18°C) to 185°F (85°C)

Quick Specs

Heyco® PVC and Nylon LED Spacers

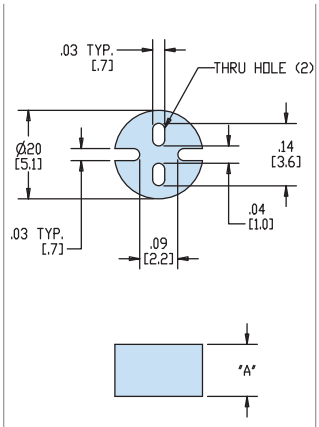

Fits T-1 3/4 (5 mm)

HLEDM-1

A mm.	PART NO. Black PVC	DESCRIPTION
2,0		
3,0	**11000**	HLEDM-1-03M
5,0		
6,0		
7,0		
10,0	**11001**	HLEDM-1-25M
12,0		
13,0		
17,0		

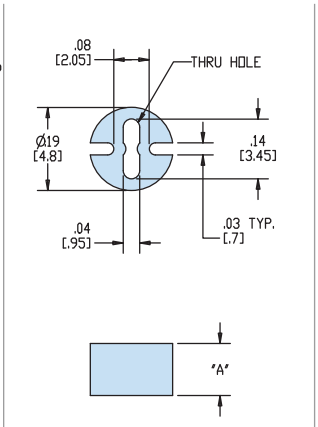

Fits T-1 (3 mm)

HLEDM-2

PART NO. Black V-0	DESCRIPTION
11002F	HLEDM-2-02M
11003F	HLEDM-2-03M
11004F	HLEDM-2-05M
11005F	HLEDM-2-06M
11006F	HLEDM-2-07M
11010F	HLEDM-2-10M
11007F	HLEDM-2-12M
11008F	HLEDM-2-13M
11009F	HLEDM-2-17M

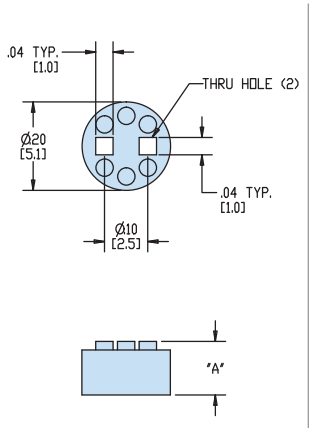

Fits T-1 3/4 (5 mm)

HLEDS2M

A in.	A mm.	PART NO. Natural	DESCRIPTION
.122	3,1	**11011**	HLEDS2M-120
.141	3,6	**11012**	HLEDS2M-140
.161	4,1	**11013**	HLEDS2M-160
.177	4,5	**11014**	HLEDS2M-180
.200	5,1	**11015**	HLEDS2M-200
.220	5,6	**11016**	HLEDS2M-220
.240	6,1	**11017**	HLEDS2M-240

Standard color as noted.

For Heyco PCB Surface Mount Miniature Connectors for LED PCB's, contact Heyco.

Quick Specs

	HLEDM-1	HLEDM-2	HLEDS2M
Material	PVC	PVC	Nylon 6/6
Flammability Rating	94HB	94V-0	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C) (All)		

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

Heyco® PVC and Nylon LED Spacers

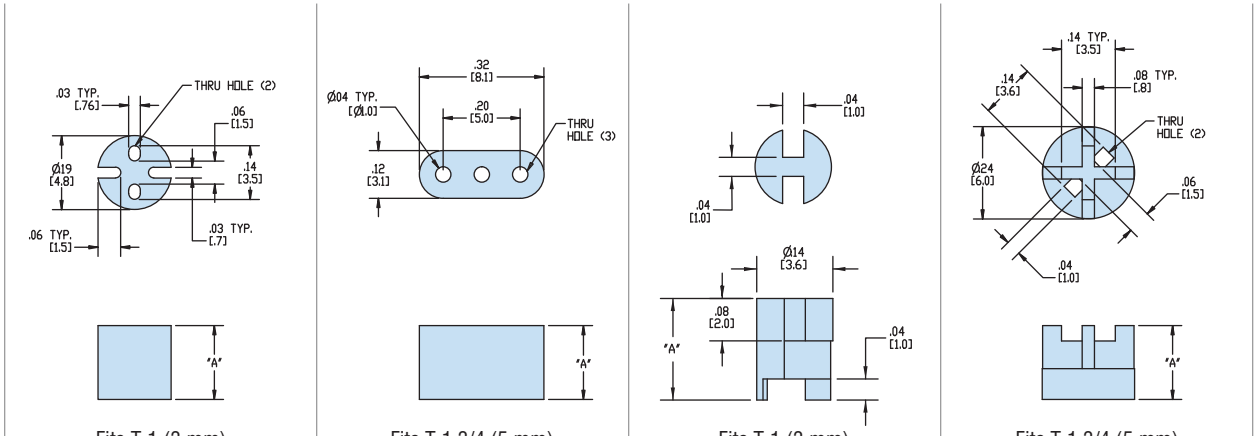

Fits T-1 (3 mm)

HLEDS2

Fits T-1 3/4 (5 mm)

HLEDS3

Fits T-1 (3 mm)

HLEDS1E

Fits T-1 3/4 (5 mm)

HLEDS2E

A in.	A mm.	PART NO. Black PVC*	DESCRIPTION	PART NO. Black PVC	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
.187	4,8			**11025**	HLEDS3-03	**11032**	HLEDS1E-03	**11041**	HLEDS2E-03
.250	6,4	**11019**	HLEDS2-04	**11026**	HLEDS3-04	**11033**	HLEDS1E-04	**11042**	HLEDS2E-04
.375	9,5	**11020**	HLEDS2-06	**11027**	HLEDS3-06	**11034**	HLEDS1E-06	**11043**	HLEDS2E-06
.500	12,7	**11021**	HLEDS2-08	**11028**	HLEDS3-08	**11035**	HLEDS1E-08	**11044**	HLEDS2E-08
.625	15,9	**11022**	HLEDS2-10	**11029**	HLEDS3-10	**11036**	HLEDS1E-10	**11045**	HLEDS2E-10
.750	19,1	**11023**	HLEDS2-12	**11030**	HLEDS3-12	**11037**	HLEDS1E-12	**11046**	HLEDS2E-12
.875	22,2					**11038**	HLEDS1E-14	**11047**	HLEDS2E-14
1.000	25,4					**11039**	HLEDS1E-16	**11048**	HLEDS2E-16

Standard as color noted.

*V-0 material available, consult Heyco.

For Heyco PCB Surface Mount Miniature Connectors for LED PCB's, contact Heyco.

Quick Specs

	HLEDS2	HLEDS3	HLEDS1E & HLEDS2E
Material	PVC	PVC	Nylon 6/6
Flammability Rating	94HB	94HB	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C) (All)		

Heyco® Nylon Cable Clamps

- **For clamping cable or tubing securely into place.**
- Resist corrosion, salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL certification or testing.)
- All parts are size marked in inches and millimeters.
- Standard material Nylon 6/6. 94V-0 available, consult Heyco.
- For Snap Rivets compatible with Heyco Cable Clamps, see the table on page 31.

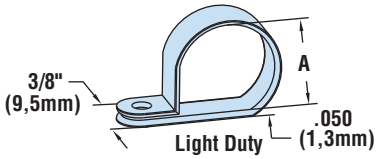

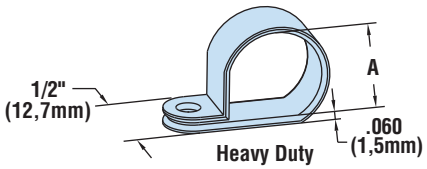

MOUNTING HOLE DIAMETER in.	MOUNTING HOLE DIAMETER mm.	SCREW SIZE	PART DIMENSION A in.	PART DIMENSION A mm.	PART NO. Black	PART NO. Natural	DESCRIPTION
Light Duty - 3/8˝ (9,5 mm) wide, .05˝ (1,3 mm) thick							
			.125	3,2	**3362**	**3312**	CCL 125-170
			.187	4,7	**3363**	**3313**	CCL 187-170
			.250	6,3	**3364**	**3314**	CCL 250-170
.170	4,3	8	.312	7,9	**3365**	**3315**	CCL 312-170
			.375	9,5	**3366**	**3316**	CCL 375-170
			.437	11,1	**3367**	**3317**	CCL 437-170
			.500	12,7	**3368**	**3318**	CCL 500-170
			.125	3,2	**3352**	**3302**	CCL 1/8
			.187	4,7	**3353**	**3303**	CCL 3/16
			.250	6,3	**3354**	**3304**	CCL 1/4
.203	5,2	10	.312	7,9	**3355**	**3305**	CCL 5/16
			.375	9,5	**3356**	**3306**	CCL 3/8
			.437	11,1	**3357**	**3307**	CCL 7/16
			.500	12,7	**3358**	**3308**	CCL 1/2
Heavy Duty - 1/2˝ (12,7 mm) wide, .06˝ (1,5 mm) thick							
			.125	3,2	**3372**	**3322**	CCH 1/8
			.187	4,7	**3373**	**3323**	CCH 3/16
			.250	6,3	**3374**	**3324**	CCH 1/4
			.312	7,9	**3375**	**3325**	CCH 5/16
			.375	9,5	**3376**	**3326**	CCH 3/8
			.437	11,1	**3377**	**3327**	CCH 7/16
			.500	12,7	**3378**	**3328**	CCH 1/2
			.562	14,3	**3379**	**3329**	CCH 9/16
			.625	15,9	**3380**	**3330**	CCH 5/8
.203	5,2	10	.687	17,4	**3381**	**3331**	CCH 11/16
			.750	19,1	**3382**	**3332**	CCH 3/4
			.812	20,6	**3383**	**3333**	CCH 13/16
			.875	22,2	**3384**	**3334**	CCH 7/8
			1.000	25,4	**3390**	**3340**	CCH 1
			1.125	28,6	**3392**	**3342**	CCH 1-1/8
			1.187	30,1	**3393**	**3343**	CCH 1-3/16
			1.250	31,8	**3394**	**3344**	CCH 1-1/4
			1.375	34,9	**3396**	**3346**	CCH 1-3/8
			1.500	38,1	**3398**	**3348**	CCH 1-1/2

Standard colors black and natural.

Quick Specs

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E54523
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 221°F (105°C) - Black 32°F (0°C) to 185°F (85°C) - Natural

Heyco® Lockit™ Nylon Cable Clamps

Lock onto Wire and Cable for Faster Final Assembly

Heavy Duty - 1/2˝ (12,7 mm) Wide, .06˝ (1,5 mm) Thick

MOUNTING HOLE DIAMETER in.	MOUNTING HOLE DIAMETER mm.	SCREW SIZE	PART DIMENSION A in.	PART DIMENSION A mm.	PART NO. Black	PART NO. Natural	DESCRIPTION
Push Lock Style	For Panels up to .125" (3,2 mm) thick						
.187	4,7	Push Mount	1.13	28,6	**3730**	**3731**	PLCC 1125
			1.19	30,1	**3734**	**3735**	PLCC 1187
			1.25	31,8	**3738**	**3739**	PLCC 1250
			1.38	34,9	**3742**	**3743**	PLCC 1375
			1.50	38,1	**3746**	**3747**	PLCC 1500
Snap Lock Style							
.190	4,8	#10	1.13	28,6	**3728**	**3729**	SLCC 1125
			1.19	30,1	**3732**	**3733**	SLCC 1187
			1.25	31,8	**3736**	**3737**	SLCC 1250
			1.38	34,9	**3740**	**3741**	SLCC 1375
			1.50	38,1	**3744**	**3745**	SLCC 1500

Standard colors black and natural.

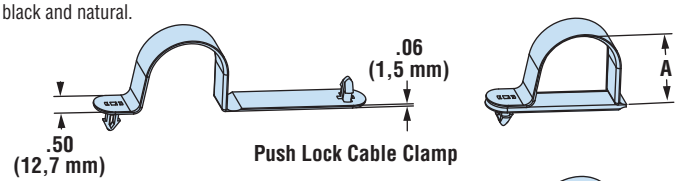

Push Lock Cable Clamp

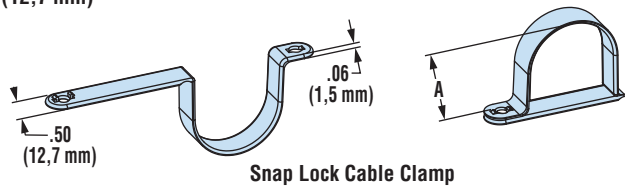

Snap Lock Cable Clamp

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 221°F (105°C) - Black
	32°F (0°C) to 185°F (85°C) - Natural

Push Lock Style

- Push-in "arrowhead" locks part onto cable quickly and easily, for faster final assembly requiring **no additional hardware**.
- Resist corrosion, salt water, weak acids, grease, and common solvents.

Snap Lock Style

- Locking feature allows for preassembly onto cable quickly and easily, for faster final assembly.
- Lock securely but can be **removed and reused**.
- Resist corrosion, salt water, weak acids, grease, and common solvents.
- Standard Material Nylon 6/6. 94V-0 available. Consult Heyco.

Quick Specs

Snap Rivet Table - for use with Heyco® Nylon Cable Clamps

For our complete line of Snap Rivets, see pages 7-62 & 7-63

PANEL THICKNESS Minimum in.	PANEL THICKNESS Minimum mm.	PANEL THICKNESS Maximum in.	PANEL THICKNESS Maximum mm.	PART NO. Black	PART NO. White	PART NO. V-0 Black	DESCRIPTION
For .170˝ (4,3 mm) Mounting Hole, Light Duty Cable Clamps							
.08	2,0	.12	3,0	**9062**	**9063**	**9062F**	PR 161-177
.12	3,0	.16	4,1	**9064**	**9065**	**9064F**	PR 161-217
.16	4,1	.20	5,1	**9066**	**9067**	**9066F**	PR 161-256
.20	5,1	.24	6,1	**9068**	**9069**	**9068F**	PR 161-295
.25	6,4	.31	7,9	**9318**	**9319**	**9318F**	PR 161-354
.39	9,9	.45	11,4	**9320**	**9321**	**9320F**	PR 161-492
For .203˝ (5,2 mm) Mounting Hole, Light or Heavy Duty Cable Clamps							
.06	1,5	.10	2,5	**9076**	**9077**	**9076F**	PR 201-177
.10	2,5	.14	3,6	**9078**	**9079**	**9078F**	PR 201-217
.14	3,6	.18	4,6	**9080**	**9081**	**9080F**	PR 201-256
.18	4,6	.22	5,6	**9082**	**9083**	**9082F**	PR 201-295

ALL NEW PRODUCTS!

Heyco® Nylon Wire Harness Clamps

- Ideal for securing, insulating, and routing cable and tubing.
- Cable and wire can be installed or removed for repair without removing clamp.
- Mounts with screws, mounting buttons or rivets.

MOUNTING HOLE DIAMETER		SCREW SIZE	PART DIMENSIONS A Bundle Dia.		B Overall Length		C Width		PART NO. Natural	DESCRIPTION	STYLE
in.	mm.		in.	mm.	in.	mm.	in.	mm.			
Snap Mouth *											
.157	4,0	#8	.71	18,0	1.38	35,1	.50	12,7	**4148**	WHCX 750	1
Open Mouth											
.157	4,0	#8	.13	3,2	.77	19,5	.34	8,5	**4149**	WHC 125	2
.205	5,2	#10	.25	6,4	.86	21,8	.41	10,4	**4150**	WHC 250	3
			.38	9,0	.83	21,0	.40	10,2	**4151**	WHC 375	
			.50	12,5	1.16	29,4	.40	10,2	**4152**	WHC 500	
			.63	15,9	1.13	28,6	.50	12,7	**4153**	WHC 625	
			.75	19,1	1.28	32,5	.50	12,7	**4154**	WHC 750	
			1.00	25,4	1.53	38,9	.50	12,7	**4210**	WHC 1000	
			1.50	38,1	2.12	53,9	.50	12,7	**4211**	WHC 1500	

Standard color natural.
*Bundle Diameter in closed position.



Style 1



Style 2



Style 3

- **Retainer clip allows clamp to be pre-positioned** on hose before final installation.
- Double row of teeth for more secure grip.
- Quick and easy installation. Tighten instantly with hand pliers or Air Tool (on page 33).
- Reusable. Can be removed without cutting.
- Supertough nylon clamps offer additional clamping strength.
- Outlast tubing under pressure.
- Non-conductive and non-magnetic.
- No moving pieces to seize or vibrate loose.
- Maximum Pressure Rating: 200 PSI.

Heyco® Nylon Lockit™ Hose Clamps

EFFECTIVE CLAMP RANGE Minimum Diameter		Maximum Diameter		PART NO. Black	DESCRIPTION	PART DIMENSIONS A Clamp Thickness		B Strap Thickness	
in.	mm.	in.	mm.			in.	mm.	in.	mm.
LHC Series									
.34	8,7	.41	10,3	**2388**	LHC 344	.25	6,4	.08	2,0
.53	13,5	.59	15,1	**2391**	LHC 531				
.67	17,0	.81	20,6	**2393**	LHC 672				

Standard color black.

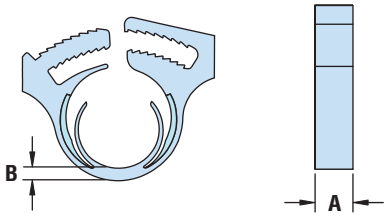

Quick Specs

	WHCX & WHC	LHC
Material	Nylon 6/6	Nylon 6/6 Supertough
Flammability Rating	94V-2	94HB
Temperature Range	32°F (0°C) to 185°F (85°C)	32°F (0°C) to 185°F (85°C)

Heyco® Nylon Hose Clamps

EFFECTIVE CLAMP RANGE				PART NO.			DESCRIPTION	PART DIMENSIONS			
Minimum Diameter		Maximum Diameter		6/6 NYLON		GF* NYLON		A		B	
in.	mm.	in.	mm.	Black	White	Black		in.	mm.	in.	mm.
Regular Style											
.25	6,4	.31	7,9	—	—	**2302**	HC 250	.13	3,2	.04	1,0
.34	8,7	.41	10,3	**2306**	**2307**	**2308**	HC 344	.21	5,3	.07	1,8
.41	10,3	.47	11,9	**2310**	**2311**	**2312**	HC 406				
.47	11,9	.53	13,5	**2314**	**2315**	**2316**	HC 468				
.53	13,5	.59	15,1	**2318**	**2319**	**2320**	HC 531				
.59	15,1	.66	16,7	**2322**	**2323**	**2324**	HC 593				
.67	17,1	.81	20,6	**2326**	**2327**	**2328**	HC 672				
.75	19,1	.88	22,2	**2330**	**2331**	**2332**	HC 750				
.88	22,2	1.00	25,4	**2334**	**2335**	**2336**	HC 875				
.95	24,1	1.09	26,2	**2338**	**2339**	**2340**	HC 953	.31	7,9		
1.03	26,2	1.19	30,2	**2342**	**2343**	**2344**	HC 1031				
1.25	31,8	1.44	36,5	**2346**	**2347**	**2348**	HC 1250				
1.41	35,7	1.63	41,3	**2350**	**2351**	**2352**	HC 1406	.36	9,1		
1.59	40,4	1.81	46,0	**2354**	**2355**	**2356**	HC 1593				
1.69	42,9	1.91	48,4	**2358**	**2359**	**2360**	HC 1687				
1.88	47,6	2.13	54,0	**2362**	**2363**	**2364**	HC 1875	.40	10,2		
2.13	54,0	2.38	60,3	**2366**	**2367**	**2368**	HC 2.125				
Strap Mate Style											
1.94	49,2	2.28	57,9	-	-	**2374**	HC 1930	.44	11,2	.08	2,0
2.25	57,1	2.88	73,0	-	-	**2377**	HC 2.25				
2.75	69,8	3.63	92,1	-	-	**2380**	HC 2.75				
3.50	88,9	4.25	108,0	-	-	**2383**	HC 3.5				
4.00	101,6	5.00	127,0	-	-	**2386**	HC 4.0				

Standard colors 6/6 nylon black and white. Glass filled nylon standard color is black.

* HC 250 features a single tang design in glass-filled nylon only.

- **Quick and easy installation. Tighten instantly with hand pliers or Air Tools.**
- **Reusable**. Can be removed without cutting.
- Glass-filled nylon clamps offer additional clamping strength.
- Outlast tubing under pressure.
- Lightweight yet resist corrosion, salt water, weak acids, grease, and common solvents.



Regular Style



Strap Mate Style

Heyco® Pneumatic Air Tool for Nylon Hose Clamps

For Lockit and Regular Style Hose Clamps only

AIR TOOL PART NO. INCLUDING JAWS	JAW PART NO.*	
	Upper	Lower
0170	0T83	0T84

*Jaw Part No. if purchased separately.

- Allows for a **semi-automated process** which increases speed over manual tools.
- Activated by hand lever reducing stress on the hand and the risk of carpal tunnel syndrome associated with repetitive assembly.
- Maximum Pressure Rating: 125 psi
- Adjustable jaws allow tool to accommodate a wide range of Heyco Hose Clamps.
- Operates only when lever is depressed.
- Tool operates on standard shop air.

Materials	Nylon 6/6 or glass-filled Nylon
Flammability Rating	94V-2 for 6/6 Nylon, 94HB for glass-filled Nylon
Temperature Range	32°F (0°C) to 221°F(105°C)

Quick Specs

ALL NEW PRODUCTS!

Heyco® Self-Aligning Nylon Cable Clamps

- Interlocking surfaces prevent the cable clamp from separating when installing the mounting screw.
- Easily guide and locate wires and cables.
- Designed with rounded edges to prevent chaffing and cutting wire insulation.

MOUNTING HOLE DIAMETER		SCREW SIZE	PART DIMENSION A		PART NO.		DESCRIPTION
in.	mm.		in.	mm.	Black	Natural	
.390″ (9,9 mm) Wide, .04″ (1,0 mm) Thick							
.187	4,7	10	.125	3,2	**13050B**	**13050**	CCSA 1/8
			.187	4,7	**13051B**	**13051**	CCSA 3/16
			.250	6,3	**13052B**	**13052**	CCSA 1/4
			.312	7,9	**13053B**	**13053**	CCSA 5/16
			.375	9,5	**13054B**	**13054**	CCSA 3/8
			.500	12,7	**13056B**	**13056**	CCSA 1/2*
.500″ (12,7 mm) Wide, .06″ (1,5 mm) Thick							
.187	4,7	10	.625	15,9	**13058B**	**13058**	CCSA 5/8
			.750	19,1	**13060B**	**13060**	CCSA 3/4
			1.000	25,4	**13062B**	**13062**	CCSA 1

Standard colors black and natural.

*.06″ (1,5 mm) Thick





CCSA Series

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C)

Heyco® Stainless Steel Cable Clamps

PART DIMENSION A		STANDARD		COATED	
		PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
in.	mm.				
P Clamp Style					
.25	6,3	**S3374**	CC H 1/4 SS	**S3324**	CC H 1/4 SS Coated
.38	9,5	**S3376**	CC H 3/8 SS	**S3326**	CC H 3/8 SS Coated
.50	12,7	**S3378**	CC H 1/2 SS	**S3328**	CC H 1/2 SS Coated
.63	15,9	**S3380**	CC H 5/8 SS	**S3330**	CC H 5/8 SS Coated
.75	19,1	**S3382**	CC H 3/4 SS	**S3332**	CC H 3/4 SS Coated
.88	22,2	**S3384**	CC H 7/8 SS	**S3334**	CC H 7/8 SS Coated

Consult Heyco for additional sizes.



- For clamping cable or tubing securely into place, especially in **harsh environments**.
- Smooth "coined clamp" edges prevent damage to cable insulation.
- Constructed from corrosion resistant 304 stainless steel.
- Coated parts are constructed from 304 stainless steel and coated with polyolefin a thermoplastic co-polymer.
- Coating provides a durable non-toxic, odorless coating that has very good low temperature flexibility and excellent electrical properties. This coating also has **FDA food contact** approval.
- All parts require a .203˝ (5,2 mm) mounting hole suitable for a #10 screw.
- Not for use in a marine salt water environment. Contact Heyco for alternative materials.
- DFARS Compliant

Heyco® Vinyl Coated Steel Clamps

ALL NEW PRODUCTS!

Screw Mount

PART NO. Black	DESCRIPTION	PART DIMENSIONS									
		A Overall Length		B Flange Diameter		C Arm Width		D Mounting Hole Dia.		Coating Length	
		in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
12067	VCSC 087-18	.87	22,1	.32	8,1	.18	4,6	.18	4,6	.47	11,9
12068	VCSC 110-12	1.10	27,9	.32	8,1	.12	3,0	.12	3,0	.71	18,0
12069	VCSC 134-12	1.34	34,0	.24	6,1	.08	2,0	.12	3,0	.94	23,9
12070	VCSC 137-14	1.38	35,1	.32	8,1	.20	5,1	.14	3,6	.98	24,9
12071	VCSC 157-14	1.57	39,9	.32	8,1	.12	3,0	.14	3,6	1.18	30,0
12072	VCSC 177-17	1.77	45,0	.35	8,9	.16	4,1	.17	4,3	1.38	35,1
12073	VCSC 189-12	1.89	48,0	.24	6,1	.08	2,0	.12	3,0	1.57	39,9
12074	VCSC 213-13	2.13	54,1	.24	6,1	.14	3,6	.13	3,3	1.81	46,0
12075	VCSC 213-18	2.13	54,1	.32	8,1	.19	4,8	.18	4,6	1.65	41,9
12076	VCSC 252-17	2.52	64,0	.32	8,1	.20	5,1	.17	4,3	2.09	53,1
12077	VCSC 260-13	2.60	66,0	.31	7,9	.18	4,6	.13	3,3	2.17	55,1
12078	VCSC 299-18	2.99	75,9	.32	8,1	.18	4,6	.18	4,6	2.56	65,0
12079	VCSC 299-28	2.99	75,9	.43	10,9	.20	5,1	.28	7,1	2.44	62,0
12080	VCSC 331-18	3.31	84,1	.32	8,1	.18	4,6	.18	4,6	2.83	71,9
12081	VCSC 496-18	4.96	126,0	.32	8,1	.24	6,1	.18	4,6	4.41	112,0

Adhesive Back Mount

PART NO. White	DESCRIPTION	PART DIMENSIONS							
		A Arm Length		B Arm Width		C Base Width		D Base Length	
		in.	mm.	in.	mm.	in.	mm.	in.	mm.
12082	VCSC 71-08A	.71	18,0	.08	2,0	.31	7,9	.35	8,9
12083	VCSC 98-14A	.98	24,9	.14	3,6	.55	14,0	.55	14,0
12084	VCSC 157-16A	1.57	39,9	.16	4,1	.75	19,1	.79	20,1

	CC H
Material	304 Stainless Steel

	VCSC
Material	Body: Soft steel, electrogalvanized .02" (0,5 mm) thick Coating: Soft, PVC, .032" (0,8 mm) minimum thickness

- Flexible soft steel easily bends and forms to desired shape and holding diameter.
- Vinyl coating both grips and insulates the cable or wire bundle.

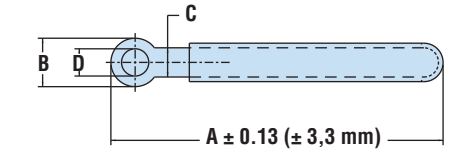



VCSC-CLAMPS

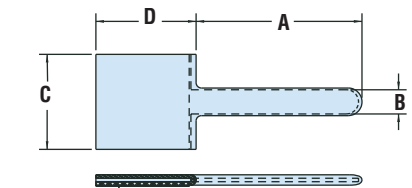

VCSC-A CLAMPS

HEYClip™ SunRunner® Cable Clip

- Robust double-compression design securely holds 1 or 2 cables from .20˝ (5,1 mm) to .30˝ (7,6 mm) in diameter.
- May be used wherever single or multiple cable management is needed.
- Smooth clip edges prevent damage to cable insulation.
- Locking tabs securely fasten clips to panels.
- Generous lead-in for installation without tools.
- Screwdriver slot for easy removal or movement of clips if necessary.
- Neatly dresses cables on panels, frames or along mounting channels.
- Fits panels up to .125" (3,2 mm) thick.
- Constructed from corrosion resistant 304 stainless steel.
- 316 stainless steel now available for marine and other harsh environments.
- SunRunner EZ designed for thicker panels - up to .250" (6,4 mm) thick.
- DFARS Compliant

PANEL THICKNESS CLAMPING RANGE Minimum in.	Minimum mm.	Maximum in.	Maximum mm.	WIRE DIA. RANGE Maximum (2) Wires	PART NO. 304 Stainless	PART NO. 316 Stainless	DESCRIPTION	FOOTPRINT A x B in.	FOOTPRINT A x B mm.	OVERALL HEIGHT C in.	OVERALL HEIGHT C mm.
Double-Compression Design for panels up to .125˝ (3,2 mm) thick											
.06	1,4	.13	3,2	.20˝ (5,1 mm)-.30˝ (7,6 mm) each cable	S6405	S6490	SunRunner 100 Pack	.97 x .50	24,6 x 12,7	.39	9,9
					S6445	S6495	SunRunner Bulk				

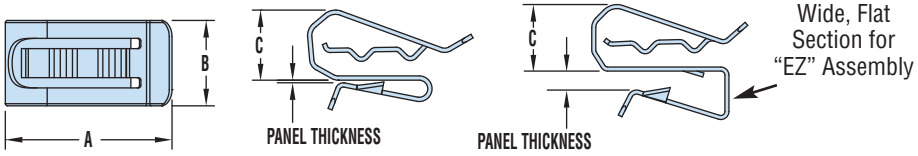

SunRunner® (above) **SunRunner® EZ (below)**

SunRunner® EZ with (optional) SunBundler (page 56) looped through slot

HEYClip™ SunRunner® EZ™ Cable Clip

PANEL THICKNESS CLAMPING RANGE Minimum in.	Minimum mm.	Maximum in.	Maximum mm.	WIRE DIA. RANGE Maximum (2) Wires	PART NO. 304 Stainless	DESCRIPTION	FOOTPRINT A x B in.	FOOTPRINT A x B mm.	OVERALL HEIGHT C in.	OVERALL HEIGHT C mm.
Double-Compression Design for panels up to .250˝ (6,4 mm) thick										
.09	2,3	.25	6,4	.20˝ (5,1 mm)-.30˝ (7,6 mm) each cable	S6407	SunRunner® EZ 100 Pack	.97 x .50	24,6 x 12,7	.41	10,4
					S6447	SunRunner® EZ Bulk				

Quick Specs

Material .025˝ thick 304 or 316 stainless steel

Certifications c UL us Certified by UL for compliance with both Canadian and US Requirements under File E54523

Temperature Range -40°F (-40°C) to 572°F (300°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

HEYClip™ SunRunner 4™ Cable Clip

PANEL THICKNESS CLAMPING RANGE Minimum in.	mm.	Maximum in.	mm.	WIRE DIA. RANGE Maximum (4) Wires	PART NO.	DESCRIPTION	FOOTPRINT A x B in.	mm.	OVERALL HEIGHT C in.	mm.
Double-Compression Design for panels up to .250˝ (6,4 mm) thick										
.13	3,2	.25	6,4	.20˝ (5,1 mm)-.30˝ (7,6 mm) each cable	S6400	SunRunner 4™ 100 Pack	1.34 x .50	34,0 x 12,7	.36	9,1
					S6440	SunRunner 4™ Bulk				

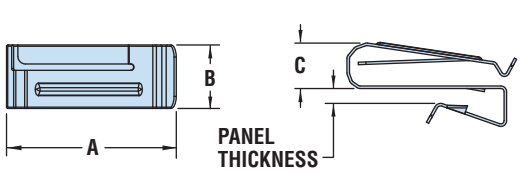

SunRunner 4™

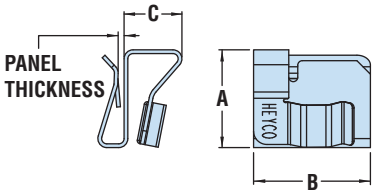

SunRunner® 90°

- Designed to hold up to (4) .20" (5,1 mm) to .30" (7,6 mm) diameter cables.
- May be used whenever multiple cable management is needed.
- Smooth clip edges prevent damage to cable insulation.
- SunRunner 4 Cable Clip is designed to accommodate panels up to .250" (6,4 mm) thick.
- Constructed from heat treated 410 stainless steel for excellent strength and corrosion protection for outdoor exposure.
- DFARS Compliant

HEYClip™ SunRunner® 90° Cable Clip

PANEL THICKNESS CLAMPING RANGE Minimum in.	mm.	Maximum in.	mm.	WIRE DIA. RANGE Maximum (1) Wire	PART NO.	DESCRIPTION	FOOTPRINT A x B in.	mm.	OVERALL HEIGHT C in.	mm.
Double-Compression, Right Angle Design for panels up to .125˝ (3,2 mm) thick										
.06	1,4	.13	3,2	.20˝ (5,1 mm)-.30˝ (7,6 mm) each cable	S6406	SunRunner 90° 100 Pack	.65 x .78	16,5 x 19,8	.39	9,9
					S6446	SunRunner 90° Bulk				

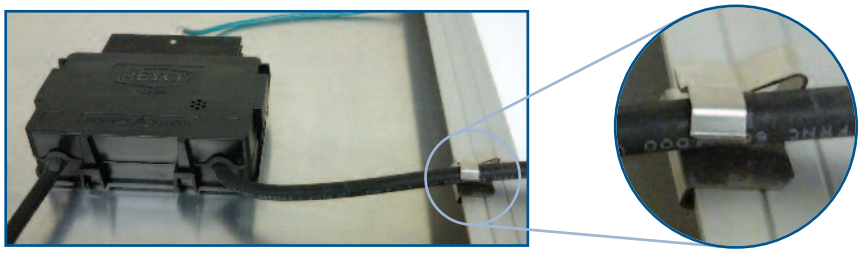

- SunRunner 90° Cable Clip is **designed to mount at a 90° angle** to the original SunRunner. The SunRunner 90° will accommodate a single cable from .20˝ (5,1 mm) to .30˝ (7,6 mm).
- SunRunner 90° is designed for use with PV modules mounted in the landscape mode. PV modules with shorter than normal junction box cables cannot be dressed out to the sides of the module. The SunRunner 90° will allow the junction box cables to be run to the adjacent modules across the short side of the PV module frame.
- DFARS Compliant

Material	SunRunner 4 – .020˝ thick heat treated 410 stainless steel SunRunner 90° – .025˝ thick 304 stainless steel
Certifications c UL us	Certified by UL for compliance with both Canadian and US Requirements under File E54523 (SunRunner 90° only)

Quick Specs

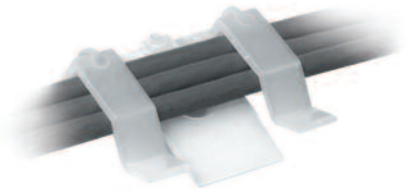

HEYClip™ Tension Wire Clips - Nylon

Adhesive-Back Mount

- **Gather and direct cables singly or in groups** smaller than those accommodated by other Heyco Wire Holders.
- Part No. 3639 (WCA-5) may also be screw mounted. #8 screws not included.
- Apply to a clean, dry surface.



WIRE CAPACITY		PART NO. Natural	DESCRIPTION	OVERALL HEIGHT		FOOTPRINT	
in.	mm.			in.	mm.	in.	mm.
Bundle Thickness x Width							
.33 x .11	8,4 x 2,8	**4218**	WC A-2	.25	6,4	.37 x .50	9,5 x 12,7
		4219	WC A-3	.25	6,4	.50 x .50	12,7 x 12,7
.13 x .25 x .50	3,2 x 6,4 x 12,7	**3638**	WC A-4	.25	6,4	.63 x .63	15,9 x 15,9
		3639	WC A-5	.28	7,1	1.00 x 1.13	25,4 x 28,6
Bundle Diameter							
.19	4,8	**3628**	WC A-42	.28	7,1	.61 x .61	15,5 x 15,5
.19	4,8	**3629**	WC A-43	.31	7,9	.63 x .63	15,9 x 15,9
.25	6,4	**3636**	WC A-44	.38	9,5		
.38	9,5	**3637**	WC A-46	.50	12,7	.75 x .75	19,1 x 19,1
.50	12.7	**3664**	WC A-47	.48	12,2	1.00 x 1.00	25,4 x 25,4
.75	19,1	**3665**	WC A-48	.65	16,5	.98 x 1.00	24,9 x 25,4

Standard color natural. For black color, consult Heyco.



WC A-2 & WC A-3



WC A-4



WC A-5



WC A-42



WC A-43 thru WC A-46



WC A-47 & WC A-48

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	-20°F (-29°C) to 150°F (66°C)

ALL NEW PRODUCTS!

HEYClip™ Tension Wire Clips - Vinyl U Style

Adhesive-Back Mount



MAXIMUM BUNDLE DIAMETER A		PART NO. Gray	DESCRIPTION	OVERALL HEIGHT D*		FOOTPRINT** B x C	
in.	mm.			in.	mm.	in.	mm.
WCUA Series							
.13	3,2	**3335**	WCUA 125	.29	7,4		
.25	6,4	**3336**	WCUA 250	.47	11,9	.75 x .75	19,1 x 19,1
.38	9,5	**3337**	WCUA 375	.59	15,1		
.50	12,7	**3338**	WCUA 500	.61	15,5		
.56	14,3	**3339**	WCUA 562	.64	16,3	1.00 x 1.00	25,4 x 25,4
.75	19,1	**3341**	WCUA 750	.90	22,9		

Standard color gray.
* At maximum wire capacity.
** Custom lengths available by special order, consult Heyco.

- Manufactured from a general purpose PVC with an excellent NFPA fire and flame resistance rating.
- The compact design combined with a strong acrylic based adhesive provides a low cost means of routing a .250˝ (6,4 mm) diameter cable or tubing.

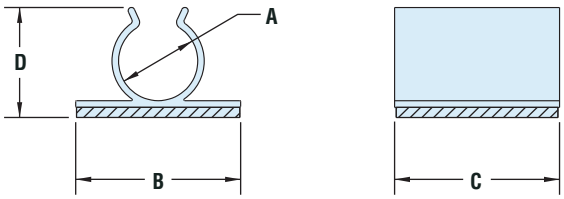

Material	PVC
Flammability Rating	94V-O
Temperature Range	-20°F (-29°C) to 150°F (66°C)

Quick Specs

HEYClip™ MaxRunner® Cable Clip Arrays

Clip Mount or Flush Mount with Screws, accommodates up to **12 Cables**

- **Hold up to 12 cables** with wire diameters ranging from .20˝ (5,2 mm) to .28˝ (7,2 mm).
- Patent Pending design is the ultimate multiple strand wire management.
- Molded internal locking tabs securely hold the cables in place preventing side-to-side movement or slippage of the cables.
- Constructed from PPE+PS flame retardant "Noryl" material with a V-0 flame rating and a UV (f1) rating for excellent resistance to outdoor exposure.
- **Clip Mount** features a versatile, 301 stainless steel mounting clip.
- Clip is designed to secure the holder to a wide variety of aluminum extruded mounting rails of various profiles with thicknesses up to .250" (6,4 mm).
- **Flush Mount** designed to mount on flat panels or extrusions without mounting ledges.
- Easily attaches to any flat surface with four mounting screws.

PANEL THICKNESS CLAMPING RANGE Minimum		Maximum		WIRE DIA. RANGE Maximum (12) Wires		PART NO.	DESCRIPTION	FOOTPRINT		OVERALL HEIGHT	
in.	mm.	in.	mm.	in.	mm.			in.	mm.	in.	mm.
Clip Mount											
.06	1,5	.25	6,4	.20 - .28	5,2 - 7,2	**S6403**	MaxRunner 12 Clip Mount	3.00 x 3.13	76,2 - 79,5	.98	24,9
Flush Mount*											
N/A: designed for flat mount				.20 - .28	5,2 - 7,2	**S6433**	MaxRunner 12 Flush Mount	3.00 x 3.13	76,2 - 79,5	1.00	25,4

*Screws not included

Clip Mount

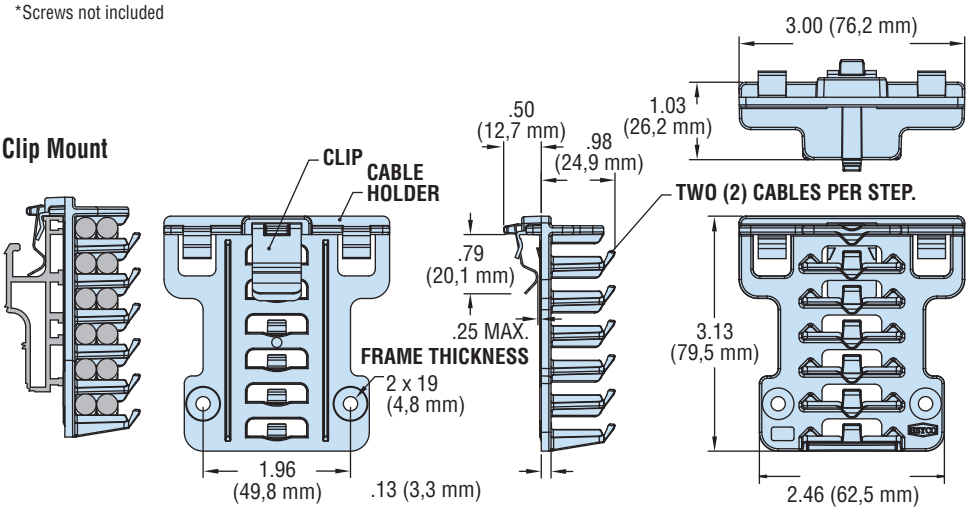

Flush Mount

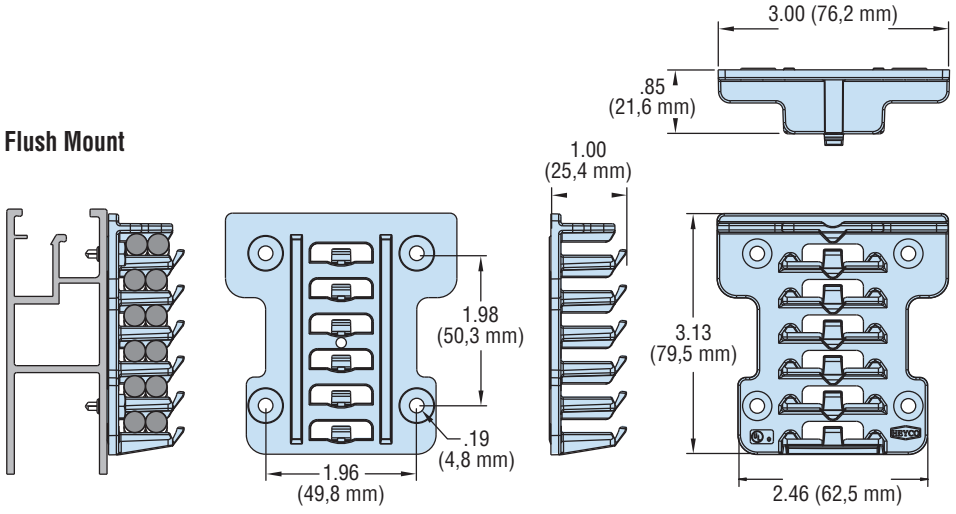

Quick Specs

Materials		PPE & PS Noryl (Clip Mount includes a 301 stainless steel mounting clip)
Certifications	c UL us	Certified by UL for Compliance with both Canadian and U.S. requirements under File E54523
Flammability Rating		94V-0
Temperature Range		-40°F (-40°C) to 203°F (95°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

HEYClip™ Wave Locks

ALL NEW PRODUCTS!

Wave Locks - Standard

BUNDLE DIAMETER RANGE in.	BUNDLE DIAMETER RANGE mm.	PART NO. Natural	DESCRIPTION	OVERALL HEIGHT C in.	OVERALL HEIGHT C mm.
WL Series					
.13 - .15	3,2 - 3,8	**12085**	WL 125	.48	12,2
.16 - .24	4,1 - 6,1	**12086**	WL 200	.82	20,7
.20 - .30	5,1 - 7,6	**12087**	WL 250	.91	23,0
.30 - .40	7,6 - 10,2	**12088**	WL 350	1.03	26,2

Standard color natural.

- Part Description Key: WL XXX, where XXX = Average Bundle Diameter (inches).
- Barreled ends for greater holding power.
- Smooth rounded edges won't cut into cable's insulations - or installer's hand.
- Locking ends twist into place with fingertip pressure.

Wave Locks - Side Entry - Arrowhead Mount

BUNDLE DIAMETER RANGE in.	BUNDLE DIAMETER RANGE mm.	PART NO. Natural	DESCRIPTION	OVERALL HEIGHT C in.	OVERALL HEIGHT C mm.
WL-90 Series For .063" (1,6 mm) thick panels					
.50 - .60	12,7 - 15,2	**12094**	WLS 550-90	.90	22,8

Standard color natural. Natural 94V-0 material available, consult Heyco.

- Part Description Key: WLS XXX-90, where XXX = Average Bundle Diameter (inches).
- .187" (4,8 mm) diameter mounting hole.

Wave Locks - Adhesive Back Mount

MAXIMUM BUNDLE DIAMETER in.	MAXIMUM BUNDLE DIAMETER mm.	PART NO. Natural	DESCRIPTION	OVERALL HEIGHT C in.	OVERALL HEIGHT C mm.
WL-A Series					
.30 - .40	7,6 - 10,2	**12096**	WL 350A	1.10	27,9
.40 - .50	10,2 - 12,7	**12097**	WL 450A	1.26	32,0
.70 - .80	17,8 - 20,3	**12098**	WL 750A	1.61	40,9

Standard color natural.

- Part Description Key: WL XXXA, where XXX = Average Bundle Diameter (inches).



Wave Locks-Standard



Wave Locks-Arrowhead

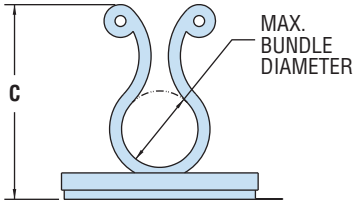

Wave Locks-Adhesive

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	32°F (0°C) 185°F (85°C)

Quick Specs

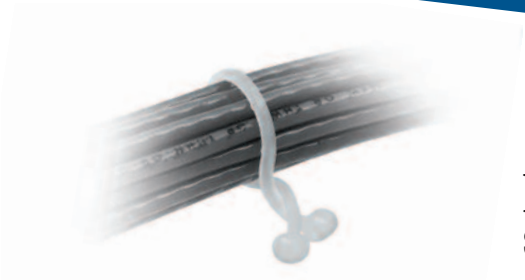

HEYClip™ Lockit™ Loops

Standard Loops

- **Barreled ends for greater holding power**.
- Smooth, rounded edges ensure that Lockit Clips won't cut into cable's insulation–or the installer's hand.
- Releasable and reusable loops for easy wire bundling.
- Locking ends twist into place with fingertip pressure.
- Part Description Key: LL XXX, where XXX = Maximum Bundle Diameter (inches).

MAXIMUM BUNDLE DIAMETER		PART NO. Natural	DESCRIPTION	OVERALL HEIGHT C	
in.	mm.			in.	mm.
LL Series					
.25	6,4	**3793**	LL 250	.84	21,2
.38	9,5	**3795**	LL 375	1.02	25,9
.50	12,7	**3797**	LL 500	1.20	30,4
.75	19,1	**3799**	LL 750	1.45	36,8

Standard color natural.



- Part Description Key (part numbers **4155** thru **4172** only): PMLL XX-YY, where XX = Maximum Bundle Diameter (inches) and YY = Height Above Panel (inches).



ALL NEW PRODUCTS!

Standoff Loops - Arrowhead Mount

MAXIMUM BUNDLE DIAMETER		PART NO. Natural	DESCRIPTION	SPACER HEIGHT A		OVERALL LENGTH ABOVE PANEL C		MOUNTING HOLE	
in.	mm.			in.	mm.	in.	mm.	in.	mm.
PMLL Series For Panels from .03" (0,8 mm) - .08" (2,0 mm) thick									
.28	7,0	**4155**	PMLL 28-19	.19	4,8	.94	23,9	.236	6,0
		4156	PMLL 28-50	.50	12,7	1.25	31,8		
		4157	PMLL 28-75	.75	19,1	1.50	38,2		
		4158	PMLL 28-100	1.00	25,4	1.75	44,5		
.39	10,0	**4160**	PMLL 39-19	.19	4,8	1.10	27,9		
		4161	PMLL 39-50	.50	12,7	1.41	35,8		
		4162	PMLL 39-75	.75	19,1	1.66	42,2		
		4163	PMLL 39-100	1.00	25,4	1.91	48,5		
.50	12,5	**4165**	PMLL 50-19	.19	4,8	1.28	32,5		
		4166	PMLL 50-50	.50	12,7	1.59	40,4		
		4167	PMLL 50-75	.75	19,1	1.84	46,8		
		4168	PMLL 50-100	1.00	25,4	2.09	53,1		
.59	15,0	**4170**	PMLL 59-19	.19	4,8	1.47	37,2		
		4171	PMLL 59-50	.50	12,7	1.78	45,2		
		4172	PMLL 59-75	.75	19,1	2.03	51,6		
		4173	PMLL 59-100	1.00	25,4	2.28	57,9		
For Panels up to .09" (2,4 mm) thick									
.25	6,4	**3778**	PMLL 250	.14	3,6	.93	23,6	.185	4,7
.38	9,5	**3779**	PMLL 375			1.11	28,2		
.50	12,7	**3780**	PMLL 500			1.26	32,0		
.75	19,1	**3782**	PMLL 750			1.55	39,4		
For Panels up to .06" (1,5 mm) thick									
1.00	25,4	**3796**	PMLL 1000	.14	3,6	2.22	56,4	.250	6,4

Standard color natural.

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

ALL NEW PRODUCTS!

HEYClip™ Lockit™ Loops and Clips

Standoff Loops - Blind Mount

MAXIMUM BUNDLE DIAMETER		PART NO. Natural	DESCRIPTION	SPACER HEIGHT A		OVERALL LENGTH ABOVE PANEL C		MOUNTING HOLE DIAMETER	
in.	mm.			in.	mm.	in.	mm.	in.	mm.
BMLL Series		For .25" (6,4 mm) *Minimum* Thickness Panels							
.28	7,0	**4052**	BMLL 28-19	.19	4,8	.94	23,9	.312	7,9
		4053	BMLL 28-50	.50	12,7	1.25	31,8		
		4260	BMLL 28-75	.75	19,1	1.50	38,2		
.39	10,0	**4056**	BMLL 39-19	.19	4,8	1.10	27,9		
		4057	BMLL 39-50	.50	12,7	1.41	35,8		
		4261	BMLL 39-75	.75	19,1	1.66	42,2		
.50	12,5	**4175**	BMLL 50-19	.19	4,8	1.28	32,5		
		4176	BMLL 50-50	.50	12,7	1.59	40,4		
		4177	BMLL 50-75	.75	19,1	1.84	46,8		
.59	15,0	**4180**	BMLL 59-19	.19	4,8	1.47	37,3		
		4181	BMLL 59-50	.50	12,7	1.78	45,2		
		4182	BMLL 59-75	.75	19,1	2.03	51,6		

Standard color natural.

- Part Description Key: BMLL XX-YY, where XX = Maximum Bundle Diameter (inches) and YY = Height Above Panel (inches).



Standoff Lockit™ Clips - Arrowhead Mount

MAXIMUM BUNDLE DIAMETER		PART NO. Natural	DESCRIPTION	SPACER HEIGHT A		OVERALL LENGTH ABOVE PANEL C		MOUNTING HOLE DIAMETER		STYLE
in.	mm.			in.	mm.	in.	mm.	in.	mm.	
PMLC Series		For Panels up to .06" (1,6 mm) thick								
.25	6,4	**4185**	PMLC 25-19	.19	4,8	.72	18,3	.187	4,8	1
		4186	PMLC 25-25	.25	6,4	.78	19,9			
		4187	PMLC 25-37	.37	9,5	.91	23,0			
		4188	PMLC 25-50	.50	12,7	1.03	26,2			
		4189	PMLC 25-63	.63	15,9	1.16	29,4			
		4190	PMLC 25-100	1.00	25,4	1.53	39,9			
For Panels from .03" (0,8 mm) - .08" (2,0 mm) thick										
.47	11,9	**4345**	PMLC 50-19	.19	4,8	.96	24,4	.187	4,8	2
		4346	PMLC 50-25	.25	6,4	1.02	26,0			
		4347	PMLC 50-37	.37	9,5	1.15	29,1			
		4348	PMLC 50-50	.50	12,7	1.27	32,3			
.73	18,5	**4191**	PMLC 73-19	.19	4,8	1.22	30,9			
		4192	PMLC 73-25	.25	6,4	1.28	32,5			
		4193	PMLC 73-37	.37	9,5	1.40	35,6			
		4194	PMLC 73-50	.50	12,7	1.53	38,8			
For Panels from .08" (2,0 mm) - .16" (4,0 mm) thick										
.47	11,9	**4366**	PMLC 50-19-1	.19	4,8	.96	24,4	.187	4,8	2
		4367	PMLC 50-25-1	.25	6,4	1.02	26,0			
		4368	PMLC 50-37-1	.37	9,5	1.15	29,1			
		4369	PMLC 50-50-1	.50	12,7	1.27	32,3			
.73	18,5	**4195**	PMLC 73-19-1	.19	4,8	1.22	30,9			
		4196	PMLC 73-25-1	.25	6,4	1.28	32,5			
		4197	PMLC 73-37-1	.37	9,5	1.40	35,6			
		4198	PMLC 73-50-1	.50	12,7	1.53	38,8			

Standard color natural.

- Locking ends click into place.
- Part Description Key: PMLC XX-YY, where XX = Maximum Bundle Diameter (inches) and YY = Height Above Panel (inches).



Style 1



Style 2

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C)

HEYClip™ Locking Releasable Wire Clips - Arrowhead Mount

- Push mount design allows for fast installation.
- Releasable and reusable wire clip.
- Bayonet design allows from .02″ (0,5 mm) panel thickness to .15″ (3,8 mm).
- Bayonet snap locks into a .250″ (6,3 mm) hole and will hold a 25 pound continuous load or a 50 pound impact load.
- Multiple sizes available for bundles from .19″ (4,7 mm) to 1.00″ (25,4 mm).

MAXIMUM BUNDLE DIAMETER		PART NO.		DESCRIPTION	FOOTPRINT A x B		OVERALL HEIGHT C		CLAMP WIDTH D		MOUNTING HOLE DIA.	
in.	mm.	Gray	Black		in.	mm.	in.	mm.	in.	mm.	in.	mm.
PMWC Series For Panels .02″ (0,5 mm) to .08″ (2,0 mm) thick												
.19	4,7	**3845**	**3870**	PMWC 187-20	.54 x 1.01	13,7 x 25,7	.39	9,9	.38	9,7	.250	6,4
.25	6,4	**3846**	**3871**	PMWC 250-20	.58 x 1.01	14,7 x 25,7	.45	11,4	.41	10,4		
.38	9,5	**3847**	**3872**	PMWC 375-20	.65 x 1.01	16,5 x 25,7	.53	13,5	.50	12,7		
.50	12,7	**3848**	**3906**	PMWC 500-20	.75 x 1.20	19,1 x 30,5	.73	18,5	.59	15,0		
.75	19,1	**3849**	**3908**	PMWC 750-20	.88 x 1.38	22,4 x 35,1	.99	25,1	.67	17,0		
1.00	25,4	**3853**	**3909**	PMWC 1000-20	1.37 x 1.88	34,8 x 47,8	1.35	34,3	.99	25,1		
For Panels .09″ (2,3 mm) to .15″ (3,8 mm) thick												
.19	4,7	**3880**	**3910**	PMWC 187-90	.54 x 1.01	13,7 x 25,7	.39	9,9	.38	9,7	.250	6,4
.25	6,4	**3881**	**3912**	PMWC 250-90	.58 x 1.01	14,7 x 25,7	.45	11,4	.41	10,4		
.38	9,5	**3882**	**3913**	PMWC 375-90	.65 x 1.01	16,5 x 25,7	.53	13,5	.50	12,7		
.50	12,7	**3883**	**3914**	PMWC 500-90	.75 x 1.20	19,1 x 30,5	.73	18,5	.59	15,0		
.75	19,1	**3884**	**3915**	PMWC 750-90	.88 x 1.38	22,4 x 35,1	.99	25,1	.67	17,0		
1.00	25,4	**3885**	**3916**	PMWC 1000-90	1.37 x 1.88	34,8 x 47,8	1.35	34,3	.99	25,1		

Standard color gray or black.

Arrowhead Mount Instructions

Simply insert base of clip into .250″ diameter hole.



HEYClip opens easily for access to bundle.



Unique lock/release feature operates easily and locks securely. When closed, HEYClip will not open until tab is released.







Release tab provides easy opening without forcing.

Barbed locking element ensures reliable retention.

Quick lock/release allows fast lock-up and easy access to wire bundle.

Unique design of push mount permits fast installation and provides high pull-out resistance.

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C) - Gray 32°F (0°C) to 221°F (105°C) - Black

HEYClip™ Locking Releasable Wire Clips - Adhesive-Back Mount



MAXIMUM BUNDLE DIAMETER		RATED STATIC LOAD	PART NO. Adhesive			DESCRIPTION	FOOTPRINT A x B		OVERALL HEIGHT C		CLAMP WIDTH D	
			Standard		Super							
in.	mm.	lb.	Gray	Black	Black		in.	mm.	in.	mm.	in.	mm.
WCA Series												
.19	4,7	1/2	**3857**	**3917**	-	WCA 187-500	.74 x .62	18,8 x 15,7	.34	8,6	.39	9,9
.25	6,4	3/4	**3858**	**3918**	**3918A**	WCA 250-750	1.00 x .87	25,4 x 22,1	.42	10,7	.63	16,0
.38	9,5	1	**3859**	**3919**	**3919A**	WCA 375-1000	1.00 x 1.00	25,4 x 25,4	.50	12,7		
.50	12,7	1-1/4	**3860**	**3920**	**3920A**	WCA 500-1250	1.00 x 1.21	25,4 x 30,7	.68	17,3	.64	16,3
.75	19,1	1-3/4	**3861**	**3921**	-	WCA 750-1750	1.15 x 1.45	29,2 x 36,8	.99	25,1		
1.00	25,4	4	**3867**	**3923**	-	WCA1000-4000	1.98 x 2.24	50,3 x 56,9	1.37	34,8	1.26	32,0
1.50	38,1	6	**3868**	**3930**	-	WCA 1500-6000	2.42 x 2.95	61,5 x 74,9	1.77	45,0	1.31	33,3

Standard color gray or black. Super duty adhesive backing available as shown.

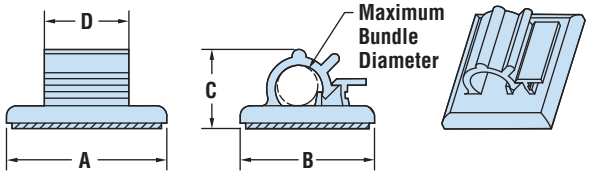

- Adhesive backing on part has a tab for easy removal.
- Releasable and reusable clips for easy wire bundle routing.
- Quick and easy installation–simply peel off backing and press into place.
- Multiple sizes for bundles from .19″ (4,7 mm) to 1.50″ (38,1 mm) in diameter.
- Static Loads pertain to parts fastened to a flat, clean, and dry surface.
- Three sizes in Super Adhesive Black.

HEYClip™ Locking Releasable Wire Clips - Adjustable

ALL NEW PRODUCTS!

MAXIMUM BUNDLE DIAMETER RANGE A				PART NO.	DESCRIPTION	OVERALL HEIGHT		FOOTPRINT	
Mimimum		Maximum		Natural		D *		B x C	
in.	mm.	in.	mm.			in.	mm.	in.	mm.
WCLP Series - Arrowhead Mount									
.47	11,9	.55	14,0	**4335**	WCLP 562	1.17	29,8	.50 x 1.24	12,7 x 31,5
.58	14,7	.75	19,1	**4336**	WCLP 750	1.36	34,5	.50 x 1.48	12,7 x 37,6
WCLA Series - Adhesive Mount**									
.22	5,5	.26	6,5	**4323**	WCLA 258	.74	18,8	.65 x .85	16,5 x 21,6
.31	7,9	.41	10,3	**4324**	WCLA 406	.90	22,8	.75 x 1.00	19,1 x 25,4
.47	11,9	.56	14,3	**4325**	WCLA 562	1.12	28,5	.75 x 1.24	19,1 x 31,5
.58	14,7	.75	19,1	**4326**	WCLA 750	1.32	33,6	.75 x 1.50	19,1 x 38,1
.87	22,2	1.00	25,4	**4327**	WCLA 1000	1.78	45,3	1.00 x 1.97	25,4 x 50,1

Standard color natural. *At maximum wire capacity. **Adhesive-Back is 1/16″ (1,6 mm) thick.

WCLP Series:
- Gather and route wires.
- Adjust to diameter needed to bundle.
- Push mount design allows for fast installation.

WCLA Series:
- Lock securely and easily. Re-open for routing changes.
- Ratcheting clip holds bundle securely in place.
- Good for high vibration applications. Once closed the clip will not open until tab is released.



WCLP Series

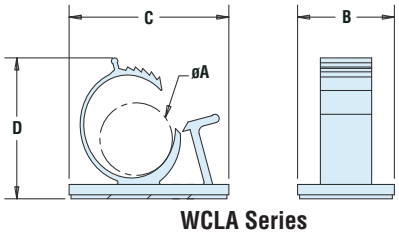

WCLA Series

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	-20°F (-29°C) to 150°F (66°C) (Adhesive-Back)
	-40°F (-40°C) to 185°F (85°C) (Adjustable)

Quick Specs

ALL NEW PRODUCTS!

HEYClip™ Cable Holders - Snap Rivet Mount

- Designed to mount easily on panel with push rivet (see table) or a #6 screw.
- Allows mounting to a wide range of panel thicknesses.
- See Quick Specs on page 7-49.

WIRE CAPACITY in.	WIRE CAPACITY mm.	PART NO. Natural	DESCRIPTION	OVERALL HEIGHT C in.	OVERALL HEIGHT C mm.	FOOTPRINT A x B in.	FOOTPRINT A x B mm.	MOUNTING HOLE DIAMETER in.	MOUNTING HOLE DIAMETER mm.
Top Entry - Regular Gate									
.44 x .17	11,1 x 4,3	**12025**	CHSR R-11	.45	11,4	.49 x .61	12,4 x 15,5	.144	3,7
.44 x .36	11,1 x 9,1	**12026**	CHSR R-16	.64	16,3				
.44 x .73	11,1 x 18,5	**12027**	CHSR R-25	1.00	18,5				
.44 x 1.04	11,1 x 26,4	**12028**	CHSR R-33	1.31	26,4				

Standard color natural.

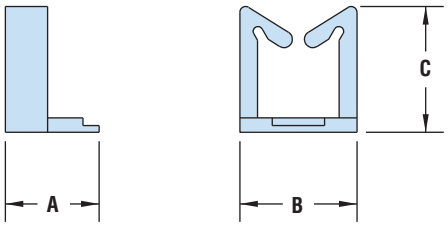

Rivet Table for CHSR			
PART NO. Black	DESCRIPTION	PANEL THICKNESS in.	PANEL THICKNESS mm.
9044	PR 142-047 BLACK	.01-.05	0,3-1,2
9046	PR 142-083 BLACK	.05-.08	1,2-2,1
9048	PR 142-106 BLACK	.07-.11	1,8-2,7
9050	PR 142-118 BLACK	.08-.12	2,1-3,0
9052	PR 142-146 BLACK	.11-.14	2,8-3,7
9054	PR 142-177 BLACK	.14-.18	3,6-4,6
9056	PR 142-217 BLACK	.18-.22	4,6-5,6

HEYClip™ Cable Holders - Two Prong Mount

For panels up to .063" (1,6 mm) thick

- Gather and direct single or bundles of cable at low cost.
- **Two orientations:**
  1. Vertical for **Top Entry** and narrow width.
  2. Horizontal for **Side Entry** and low height where clearance is a problem.
- **Two gate types:**
  1. Regular gate secures cables with tension alone.
  2. Latch gate locks cables in place.

  Both types install with fingertip pressure into a 3/16" (4,8 mm) diameter mounting hole.
- Part Description Key: CH X-Y-Z, where R = Regular Gate, L = Latch Gate, Y = Overall Height (mm) and P indicates the Split Prong mounting design.
- See Quick Specs on page 7-49.

WIRE CAPACITY in.	WIRE CAPACITY mm.	PART NO. Natural	DESCRIPTION	OVERALL HEIGHT C in.	OVERALL HEIGHT C mm.	FOOTPRINT A x B in.	FOOTPRINT A x B mm.	MOUNTING HOLE DIAMETER in.	MOUNTING HOLE DIAMETER mm.
Top Entry - Regular Gate									
.44 x .19	11,1 x 4,8	**4337**	CH R-13-P	.51	13,0	.22 x .61	5,6 x 15,5	.187	4,8
.44 x .38	11,1 x 9,7	**4338**	CH R-18-P	.71	18,0				
.44 x .74	11,1 x 18,8	**4339**	CH R-27-P	1.06	26,9				
.44 x 1.05	11,1 x 26,7	**4340**	CH R-35-P	1.37	34,8				
Top Entry - Latch Gate									
.44 x .14	11,1 x 3,6	**4341**	CH L-13-P	.51	13,0	.22 x .61	5,6 x 15,5	.187	4,8
.44 x .33	11,1 x 8,4	**4342**	CH L-18-P	.71	18,0				
.44 x .69	11,1 x 17,5	**4343**	CH L-27-P	1.06	27,0				
.44 x 1.00	11,1 x 25,4	**4344**	CH L-35-P	1.37	34,8				

Standard color natural. Flame retardant UL 94V-0 material available, consult Heyco.

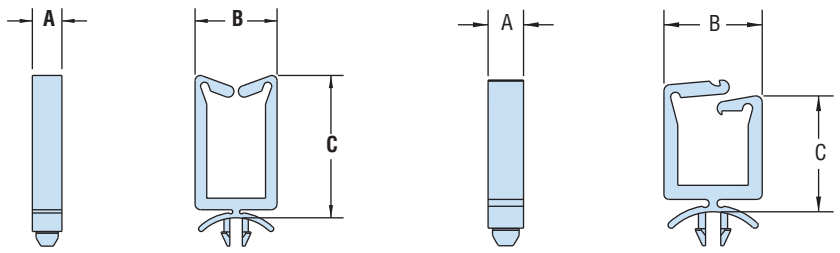

Regular Gate **Latch Gate**

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

ALL NEW PRODUCTS!

HEYClip™ Shorty Cable Holders - Arrowhead Mount

Overall Height ≤ .51˝ (13,0 mm)

WIRE CAPACITY in.	WIRE CAPACITY mm.	PART NO. Natural 94V-2	PART NO. Natural 94V-0	DESCRIPTION	OVERALL HEIGHT C in.	OVERALL HEIGHT C mm.	FOOTPRINT A x B in.	FOOTPRINT A x B mm.	MOUNTING HOLE DIA. in.	MOUNTING HOLE DIA. mm.	STYLE
MH1,7 Series For Panels up to .063˝ (1,6 mm) thick											
.19 x .04	4,8 x 0,9	**4245**	-	CHRS 41-1 †	.16	4,1	.08x.28	2,0x7,0	.067	1,7	3
MH1,8 Series For Panels up to .063˝ (1,6 mm) thick											
.17 x .12	4,3 x 3,0	**4222**	**4222F**	CHRS 58-1	.23	5,8	.07 x .27	1,9 x 6,9	.071	1,8	1
x .33	x 8,5	**4223**	**4223F**	CHRS 112-1	.44	11,2					
For Panels up to .090˝ (2,3 mm) thick											
.17 x .12	4,3 x 3,0	**4224**	**4224F**	CHRS 58-2	.23	5,8	.07 x .27	1,9 x 6,9	.071	1,8	1
x .33	x 8,5	**4225**	**4225F**	CHRS 112-2	.44	11,2					
MH3,0 Series For Panels up to .063˝ (1,6 mm) thick											
.16 x .25	4,1 x 6,4	**3660**	-	CHRS 1	.29	7,4	.17 x .36	4,3 x 9,1	.118	3,0	2
.26 x .12	6,6 x 3,0	**4226**	**4226F**	CHRS 73-1	.29	7,3	.16 x .36	4,0 x 9,1*			
.32 x .16	8,1 x 3,9	**4227**	**4227F**	CHRS 91-1	.36	9,1	.16 x .43	4,0 x 10,8			
.36 x .24	9,1 x 6,0	**4228**	**4228F**	CHRS 112-1	.44	11,2	.16 x .47	4,0 x 12,0			
x .30	x 7,7	**4229**	**4229F**	CHRS 130-1	.51	13,0					
For Panels up to .100˝ (2,6 mm) thick											
.26 x .12	6,6 x 3,0	**4230**	**4230F**	CHRS 73-2	.29	7,3	.16 x .36	4,0 x 9,1*	.118	3,0	2
.32 x .16	8,1 x 3,9	**4231**	**4231F**	CHRS 91-2	.36	9,1	.16 x .43	4,0 x 10,8			
.36 x .24	9,1 x 6,0	**4232**	**4232F**	CHRS 112-2	.44	11,2	.16 x .47	4,0 x 12,0			
x .30	x 7,7	**4233**	**4233F**	CHRS 130-2	.51	13,0					
MH3,5 Series For Panels up to .063˝ (1,6 mm) thick											
.16 x .25	4,1 x 6,4	**3661**	-	CHRS 2	.29	7,4	.17 x .36	4,3 x 9,1	.138	3,5	2
x .35	x 8,9	**3662**	-	CHRS 3	.45	11,4	.17 x .48	4,3 x 12,2			
.26 x .12	6,6 x 3,0	**4234**	**4234F**	CHRS 73-1-2	.29	7,3	.16 x .36	4,0 x 9,1*			
.32 x .16	8,1 x 3,9	**4235**	**4235F**	CHRS 91-1-2	.36	9,1	.16 x .43	4,0 x 10,8			
.36 x .24	9,1 x 6,0	**4236**	**4236F**	CHRS 112-1-2	.44	11,2	.16 x .47	4,0 x 12,0			
x .30	x 7,7	**4237**	**4237F**	CHRS 130-1-2	.51	13,0					
For Panels up to .090˝ (2,3 mm) thick											
.26 x .12	6,6 x 3,0	**4238**	**4238F**	CHRS 73-2-2	.29	7,3	.16 x .36	4,0 x 9,1*	.138	3,5	2
.32 x .16	8,1 x 3,9	**4239**	**4239F**	CHRS 91-2-2	.36	9,1	.16 x .43	4,0 x 10,8			
.36 x .24	9,1 x 6,0	**4262**	**4262F**	CHRS 112-2-2	.44	11,2	.16 x .47	4,0 x 12,0			
x .30	x 7,7	**4263**	**4263F**	CHRS 130-2-2	.51	13,0					

Standard color natural 94V-2 and natural 94V-0.
† Two Prong mounting style.
*Features raised "bumps" on sides of part.

- Part Description Key: CHRS-X-Y-Z, where X = Overall Height (mm), Y = Mounting Panel Thickness (mm) and Z (if present) indicates a different Mounting Hole Dia.





Style 1



Style 2



Style 3

Material		Nylon 6/6
Certifications		Recognized under UL File E54523 - pending
Flammability Rating		94V-2
Temperature Range		32°F (0°C) to 185°F (85°C)

Quick Specs

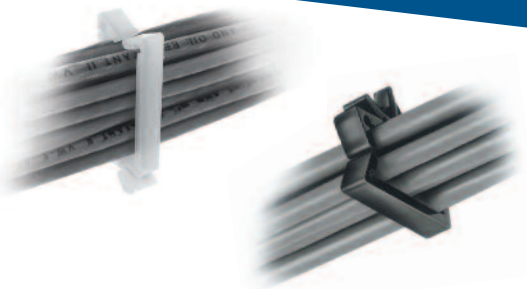

HEYClip™ Cable Holders - Arrowhead Mount

- Gather and direct single or bundles of cable at low cost.
- **Two orientations:**
  1. Vertical for **Top Entry** and narrow width.
  2. Horizontal for **Side Entry** and low height where clearance is a problem.
- **Two gate types:**
  1. Regular gate secures cables with tension alone.
  2. Latch gate locks cables in place.
- Both types install with fingertip pressure into a 3/16″ (4,8 mm) diameter mounting hole.

Top Entry: Part Description Key: CH X-Y-Z, where R = Regular Gate, L = Latch Gate, Y = Overall Height (mm), and Z, if present, distinguishes Panel Thickness.

Side Entry: Part Description Key: CH X-Y-Z, where R = Regular Gate, L = Latch Gate Y = Approximate Overall Length (mm), and Z is always 90 indicating a Side Entry part.

WIRE CAPACITY in.	WIRE CAPACITY mm.	PART NO. Natural	PART NO. Black	DESCRIPTION	OVERALL HEIGHT C in.	OVERALL HEIGHT C mm.	FOOTPRINT A x B in.	FOOTPRINT A x B mm.	MOUNTING HOLE DIA. in.	MOUNTING HOLE DIA. mm.
Top Entry-Regular Gate For Panels up to .047″ (1,2 mm) thick										
.80 x .50	20,3 x 12,7	**3596**	-	CH R-20 *	.77	19,6	.22 x .93	5,5 x 23,6	.187	4,8
.80 x .85	20,3 x 21,6	**3597**	-	CH R-28 *	1.11	28,4				
For panels up to .078″ (1,9 mm) thick										
.44 x .19	11,1 x 4,8	**3600**	**3600B**	CH R-12	.48	12,2	.22 x .61	5,6 x 15,5	.187	4,8
.44 x .38	11,1 x 9,7	**3605**	**3605B**	CH R-18	.72	18,2				
.44 x .74	11,1 x 18,8	**3610**	**3610B**	CH R-27	1.06	27,0				
.44 x 1.05	11,1 x 26,7	**3615**	**3615B**	CH R-35	1.38	35,0				
For Panels up to .125″ (3,2 mm) thick										
.44 x .19	11,1 x 4,8	**3601**	**3601B**	CH R-13-3	.51	13,0	.22 x .61	5,6 x 15,5	.187	4,8
.44 x .38	11,1 x 9,7	**3606**	**3606B**	CH R-18-3	.71	18,0				
.44 x .74	11,1 x 18,8	**3611**	**3611B**	CH R-27-3	1.06	26,9				
.44 x 1.05	11,1 x 26,7	**3616**	**3616B**	CH R-35-3	1.37	34,8				
Top Entry-Latch Gate For Panels up to .078″ (1,9 mm) thick										
.44 x .14	11,1 x 3,6	**3620**	**3620B**	CH L-12	.48	12,2	.22 x .61	5,6 x 15,5	.187	4,8
.44 x .33	11,1 x 8,4	**3625**	**3625B**	CH L-18	.72	18,3				
.44 x .69	11,1 x 17,5	**3630**	**3630B**	CH L-27	1.07	27,2				
.44 x 1.00	11,1 x 25,4	**3635**	**3635B**	CH L-35	1.39	35,3				
For Panels up to .125″ (3,2 mm) thick										
.44 x .14	11,1 x 3,6	**3602**	**3602B**	CH L-13-3	.51	13,0	.22 x .61	5,6 x 15,5	.187	4,8
.44 x .33	11,1 x 8,4	**3607**	**3607B**	CH L-18-3	.71	18,0				
.44 x .69	11,1 x 17,5	**3612**	**3612B**	CH L-27-3	1.06	27,0				
.44 x 1.00	11,1 x 25,4	**3617**	**3617B**	CH L-35-3	1.38	35,0				
Side Entry-Regular Gate For Panels up to .063″ (1,6 mm) thick										
.19 x .42	4,8 x 10,7	**3618**	–	CH R-11-90	.42	10,7	.22 x .54	5,6 x 13,6	.187	4,8
For Panels up to .090″ (2,3mm) thick										
.44 x .75	11,1 x 19,1	**3652**	**3652B**	CH R-27-90	.62	15,9	.22 x 1.00	5,6 x 25,4	.187	4,8
.44 x 1.06	11,1 x 26,9	**3667**	**3667B**	CH R-35-90			.22 x 1.33	5,6 x 33,8		
Side Entry-Latch Gate For Panels up to .090″ (2,3 mm) thick										
.44 x .72	11,1 x 18,3	**3697**	**3697B**	CH L-27-90	.66	16,7	.22 x 1.00	5,6 x 25,4	.187	4,8
.44 x 1.03	11,1 x 26,2	**3712**	**3712B**	CH L-35-90			.22 x 1.33	5,6 x 33,8		

Standard colors natural and black, except as noted. Flame retardant UL 94V-0 material available, consult Heyco.

* Part Nos. **3596** and **3597** are of relatively wide construction.

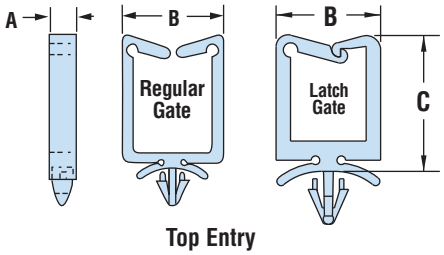

Top Entry





Side Entry



Part No. 3618

Quick Specs

Material	Nylon 6/6
Certifications	Recognized under UL File E54523 (Top Entry parts only)
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

ALL NEW PRODUCTS!

HEYClip™ Cable Holders - Blind Head Mount

For .250˝ (6,4 mm) *Minimum* Thickness Panels

- Gather and route cables.
- Part Description Key: CH RB-X, where X = Overall Height (mm).

WIRE CAPACITY in.	WIRE CAPACITY mm.	PART NO. Natural	DESCRIPTION	OVERALL HEIGHT C in.	OVERALL HEIGHT C mm.	FOOTPRINT A x B in.	FOOTPRINT A x B mm.	MOUNTING HOLE DIA. in.	MOUNTING HOLE DIA. mm.
Top Entry - Regular Gate									
x .19	x 4,8	**4202**	CH RB-13	.51	13,0	.22 x .61	5,6 x 15,5	.312	7,9
.44 x .38	11,1 x 9,7	**4203**	CH RB-18	.71	18,0				
x .74	x 18,8	**4204**	CH RB-27	1.06	26,9				
x 1.05	x 26,7	**4205**	CH RB-35	1.37	34,8				
Top Entry - Latch Gate									
x .14	x 3,6	**4206**	CH LB-13	.51	13,0	.22 x .61	5,6 x 15,5	.312	7,9
.44 x .33	11,1 x 8,4	**4207**	CH LB-18	.71	18,0				
x .69	x 17,5	**4208**	CH LB-27	1.06	27,0				
x 1.00	x 25,4	**4209**	CH LB-35	1.38	35,0				
Side Entry - Regular Gate*									
.11 x .33	2,8 x 8,3	**4220**	CH RB-13-90	.20	5,1	.37 X .50	9,5 X 12,7	.157	4,0
x .49	x 12,5	**4221**	CH RB-17-90	.20	5,1	.37 X .67	9,5 X 17,0		

Standard color natural. Flame retardant UL 94V-0 material available, consult Heyco. *For Panet thickness up to .161˝ (4,1 mm)

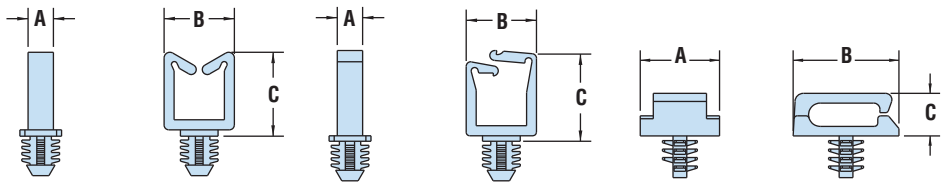

Top Entry Regular Gate | Top Entry Latch Gate | Side Entry Regular Gate

- Gather and direct single or bundles of cable.
- Apply to a clean, dry surface.
- Adhesive backing on part has tab for easy removal.
- Part Description Key: CH RA-X, where X = Overall Height (mm).
- Feature convenient peel away tab (or something like that - should agree with other AB parts).
- Part Description Key: CH RA-X, where X = Overall Height (mm).

HEYClip™ Cable Holders - Adhesive Back Mount

WIRE CAPACITY in.	WIRE CAPACITY mm.	PART NO. Natural	DESCRIPTION	OVERALL HEIGHT C in.	OVERALL HEIGHT C mm.	FOOTPRINT A x B in.	FOOTPRINT A x B mm.	STYLE
CH RA Series								
.17 x .12	4,4 x 3,0	**4271**	CH RA-72	.28	7,2	.37X.37	9,5 X 9,5	4
.18 x .04	4,6 x 1,0	**4212**	CH RA-65	.26	6,5	.37 x .37	9,4 x 9,4	
x .11	x 2,8	**4213**	CH RA-83	.33	8,3			
.25 x .13	6,4 x 3,2	**4214**	CH RA-102	.40	10,2	.50 x .50	12,7 x 12,7	1
.31 x .16	7,9 x 4,1	**4215**	CH RA-119	.47	11,9			
.35 x .24	8,9 x 6,1	**4216**	CH RA-141	.56	14,1			
x .31	x 7,9	**4217**	CH RA-157	.62	15,7			
x .19	x 4,7	**3603**	CH RA-122	.47	11,9	.76 x .74	19,3 x 18,8	2
.45 x .38	11,4 x 9,5	**3608**	CH RA-172	.68	17,2			
x .75	x 19,0	**3613**	CH RA-267	1.05	26,7			
.29 x .25	7,4 x 6,4	**3614**	CH RA-121	.48	12,1	.50 x 1.00	12,7 x 25,4	3

Standard color natural. Flame retardant UL 94V-0 material available, consult Heyco.



Style 1



Style 2



Style 3



Style 4

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C)

ALL NEW PRODUCTS!

HEYClip™ Standoff Cable Holders - Arrowhead Mount

- Self-adjusting Arrowhead Mount protrudes approximately .22″ (5,6 mm). (CHSO only)
- Part Description Key: CH SO-X, where X = Overall Height (mm).
- Self-adjusting Arrowhead Mount protrudes approximately .20″ (5,1 mm).

WIRE CAPACITY in.	WIRE CAPACITY mm.	PART NO. Natural	DESCRIPTION	HEIGHT ABOVE PANEL C in.	HEIGHT ABOVE PANEL C mm.	FOOTPRINT A x B in.	FOOTPRINT A x B mm.	MOUNTING HOLE DIA. in.	MOUNTING HOLE DIA. mm.
CH SO Series For Panels up to .063" (1,6 mm) thick									
.54 x .54	13,6 x 13,6	**3349**	CH SO-6	1.00	25,5	16 x .71	4,0 x 18,0	.187	4,8
		3350	CH SO-8	1.08	27,5				
		3351	CH SO-10	1.16	29,5				
		3359	CH SO-12	1.24	31,5				
		3360	CH SO-14	1.32	33,5				
		3361	CH SO-16	1.40	35,5				
		3369	CH SO-18	1.48	37,5				
		3370	CH SO-20	1.56	39,5				
		3371	CH SO-22	1.63	41,5				
		3385	CH SO-24	1.71	43,5				
		3386	CH SO-26	1.79	45,5				
		3387	CH SO-28	1.87	47,5				
CH RJ Series For Panels .09″ (2,3 mm) thick									
.62	15,7	**3598**	CH RJ-625	1.70	42,9	.22 x 1.00	5,6 x 25,4	.187	4,8

Standard color natural. Flame retardant UL 94V-0 material available, consult Heyco.

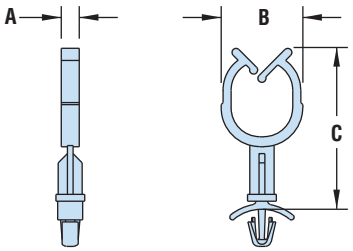

CH SO Series



CH RJ Series

HEYClip™ Round Cable Holders

BUNDLE DIAMETER in.	BUNDLE DIAMETER mm.	PART NO. Natural	PART NO. Black	DESCRIPTION	OVERALL HEIGHT C in.	OVERALL HEIGHT C mm.	FOOTPRINT A x B in.	FOOTPRINT A x B mm.	MOUNTING HOLE in.	MOUNTING HOLE mm.	STYLE
Arrowhead Mount - For Panels from .030″ (0,8 mm) to .060″ (1,5 mm) thick											
.45	11,4	**3663**	**3663B**	CHCS 4	.57	14,5	.18 x .57	4,5 x 14,5	.12	3,1	1
.62	15,9	**3666**	**3666B**	CHCS 10	.97	24,6	.30 x 1.03	7,5 x 26,2	.25	6,4	2
Arrowhead Mount - For Panels from .058″ (1,5 mm) to .064″ (2,5 mm) thick											
1.00	25,4	**3668**	**3668B**	CHCS 16	1.34	34,1	.38 x 1.25	9,5 x 31,7	.25	6,4	3
Slotted with Adhesive Back Mount											
.62	15,9	**3931**	-	CHCS 10A	.95	24,1	1.00 x 1.00	25,4 x 25,4	.25	6,4	4
Slotted for Screw Mount											
.62	15,9	**3932**	-	CHCS 10B	.92	23,3	1.00 x 1.00	25,4 x 25,4	.25	6,4	4

Standard color natural. Flame retardant UL 94V-0 material available, consult Heyco.

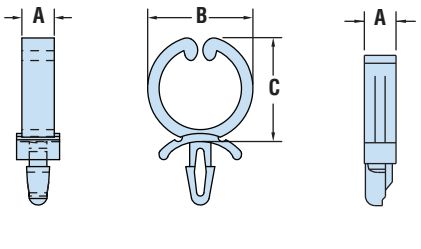

Style 1



Style 2



Style 3



Style 4

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C)

ALL NEW PRODUCTS!

HEYClip™ Lockit™ Cable Holders - Arrowhead Mount

WIRE CAPACITY in.	WIRE CAPACITY mm.	PART NO. Natural	DESCRIPTION	OVERALL HEIGHT C in.	OVERALL HEIGHT C mm.	FOOTPRINT A x B in.	FOOTPRINT A x B mm.	MOUNTING HOLE DIA. in.	MOUNTING HOLE DIA. mm.	STYLE
CH LK Series		For Panels up to .063″ (1,6 mm) thick								
.11 x .19	2,9 x 4,8	**3310**	CH LK-49	.19	4,9	.08 x .34	2,0 x 8,7	.063	1,6	1
.15 x .52	3,7 x 13,1	**3311**	CH LK-90	.35	9,0	.20 x .77	5,0 x 19,6	.138	3,5	
.15 x .53	3,7 x 13,5	**3345**	CH LK-95	.37	9,5	.20 X .77	5,0 X 19,6			
.19 x .42	4,8 x 10,7	**3319**	CH LK-106	.42	10,6	.20 x .69	5,0 x 17,4			
.35 x .42	8,8 x 10,7	**3320**	CH LK-146	.57	14,6			.187	4,8	2
.39 x .63	10,0 x 16,1	**3321**	CH LK-158	.62	15,8	.20 x .88	5,0 x 22,3			
.55 x .64	14,1 x 16,3	**3347**	CH LK-196	.77	19,6					
.74 x .85	18,0 x 21,7	**3391**	CH LK-273	1.07	27,3	.20 x .96	5,0 x 24,3			

Standard color natural. Flame retardant UL 94V-0 material available, consult Heyco.

- Lock securely on closure.
- Self-adjusting Arrowhead Mount protrudes approximately as follows:
  –PN 3310 .06″ (1,5 mm)
  –PN 3311 .12″ (3,0 mm)
  –PN 3319-3347 .22″ (5,6 mm)
- Part Description Key: CH LK-X, where X = Overall Height (mm).



Style 1



Style 2

HEYClip™ Hinged Cable Holders - Adhesive-Back Mount

WIRE CAPACITY in.	WIRE CAPACITY mm.	PART NO.	DESCRIPTION	OVERALL HEIGHT C in.	OVERALL HEIGHT C mm.	FOOTPRINT A x B in.	FOOTPRINT A x B mm.
CH HA Series							
.50 x 1.25	11,2 x 31,8	**3309**	CH HA-50-125 GRAY	.75	19,1	.75 x 1.75	19,1 x 44,5
.25 x 1.25	5,6 x 31,8	**3395**	CH HA-25-125 GRAY	.50	12,7		
.25 x 2.50	12,7 x 63,5	**3397**	CH HA-25-250 NATURAL	.50	12,7	.75 x 3.00	19,1 x 76,2

Standard color as shown.

- Lock securely and adhere to most clean, dry surfaces.
- Part No. 3309 maximum flat wire height .50″ (12,7 mm), width 1.25″ (31,8 mm)
- Part No. 3395 maximum flat wire height .25″ (6,4 mm), width 1.25″ (31,8 mm)
- Part No. 3397 maximum flat wire height .25″ (6,4 mm), width 2.50″ (63,5 mm)





Material	Nylon 6/6
Flammability Rating	94V-0
Temperature Range	32°F (0°C) to 185°F (85°C)

Quick Specs

ALL NEW PRODUCTS!

HEYClip™ Hinged Edge Cable Holders

Designed for Rectangular Edge Slot or Through-Hole Mounting - suitable for retrofit applications

- Designed for rectangular mounting hole or edge slot mounting.
- Hinged latch design permits retrofitting into pre-wired applications.
- Route cables and protect them from sharp edges.

WIRE CAPACITY		PANEL DIMENSIONS Thru Hole or Edge Slot								Thickness		PART NO. Natural	DESCRIPTION	PART DIMENSIONS			
		X		Y		Z		W						A		B	
in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.			in.	mm.	in.	mm.
CH HE SERIES																	
.77 x .20	19,5 x 5,2	.858	21,8	.421	10,7	.161	4,1	.98 1.02	25,0 26,0	.031 - .063 .079	0,8 - 1,6 2,0	**3300**	CH HE-25	1.19	30,2	.47	12,0
.77 x .47	19,5 x 12,0	.870	22,0	.710	18,0	.200	5,0	.98	25,0	.020 - .063	0,5 - 1,6	**3301**	CH HE-22	1.22	31,0	.75	19,0

Standard color natural.

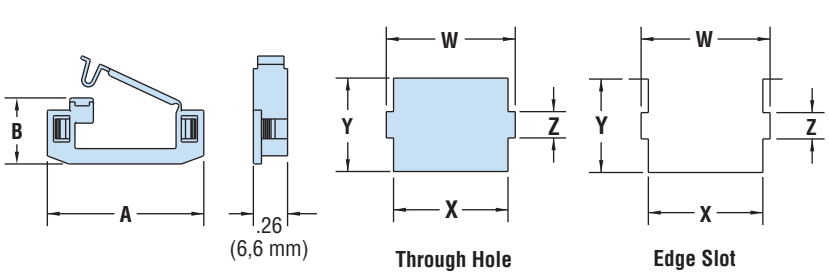

CH HE Series

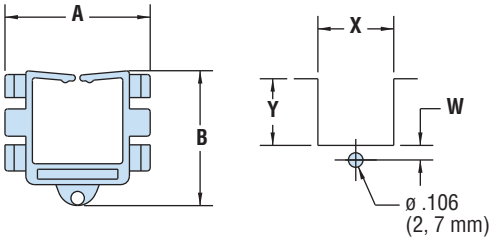

CH E Series

HEYClip™ Edge Cable Holders

Designed for Rectangular Edge Slot Mounting - suitable for retrofit applications

WIRE CAPACITY		PANEL DIMENSIONS Edge Slot Size						Thickness		PART NO. Natural	DESC.	PART DIMENSIONS			
		X		Y		W						A		B	
in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.			in.	mm.	in.	mm.
CH E Series															
.46 x .29	11,6 x 7,4	.551	14,0	.484	12,4	.106	2,7	.031 - .063	0,8 - 1,6	**4246**	CH E-14	.78	19,8	.64	16,3
.66 x .59	16,7 x 15,0	.756	19,2	.831	21,1	.098	2,5	.031 - .063	0,8 - 1,6	**4247**	CH E-19	1.06	26,8	.98	24,9
.66 x .58	16,8 x 14,7	.827	21,0	.827	21,0	.094	2,4	.031 - .063	0,8 - 1,6	**4248**	CH E-21	1.13	28,8	.98	24,9
.90 x .91	22,8 x 23,1	1.063	27,0	1.140	29,0	.118	3,0	.031 - .063	0,8 - 1,6	**4249**	CH E-27	1.37	34,8	1.31	33,3

Standard color natural.

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C)

Heyco® Hinged Edge Strain Relief Bushings

Designed for Rectangular Edge Slot or Split Panel Mounting – suitable for retrofit applications

WILL FIT THESE CABLES				PANEL DIMENSIONS						PART NO.	DESCRIPTION	BODY LENGTH	
UL Type	AWG/ Conds.	Approx. Size		Edge Slot or Split Panel X		Y		Thickness		Black			
		In.	mm.	in.	mm.	in.	mm.	in.	mm.			in.	mm.
ST 101A – for Round or Flat Cables													
SV & SVT	18/2	.220 .245	5,6 6,2	.512	13,0	.453	11,5	.06	1,6	**1839**	ST 101A	.55	14,0
	18/3	.250 .255	6,4 6,5										
HPD	18/2 16/2	.270 .290	6,9 7,4										
SR 8R-200 – For Round, Flat or Multiple Cables													
Round, Flat or Multiple		up to .600	up to 15,2	.875	22,2	.875	22,2	.10	2,5	**1266**	SR 8R-200	.80	20,3

Standard color black. Consult Heyco for white and other colors

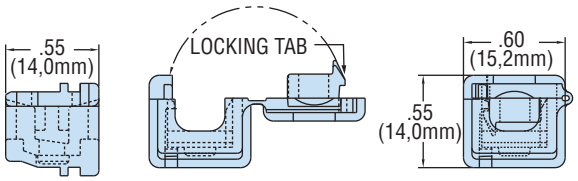

ST 101A



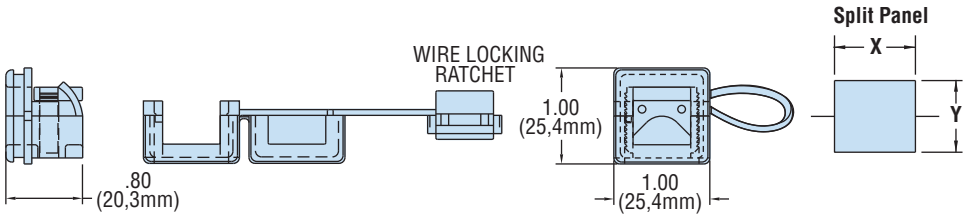

SR 8R-200

- Designed for rectangular edge slot or split panel mounting - suitable for retrofit applications.
- Independent of final mounting, Hinged Edge Strain Reliefs self-lock onto the cable and may be preassembled "off line" for final assembly at a later time or remote location.
- Hinged Edge Strain Reliefs hold so well they pass the UL pull-out test requirements with or without panel support.
- Rectangular design eliminates the possibility of part rotation under forces of twist.
- SR 8R-200's unique wire locking ratchet allows for a generous wire range of .25˝ (6,4 mm) to .60˝ (15,2 mm).
- Heyco's automated Pre-Assembly Equipment (for ST 101A only) speeds assembly onto the cable, reducing both cost and the risk of carpal tunnel syndrome. See pages 4-15 & 4-16 in the Heyco Catalog.
- Consult Heyco for other wire types and sizes.
- For our complete line of Strain Relief Bushings, see Section 4 in the Heyco Catalog.

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E15331
	Canadian Certified by Canadian Standards Association File 8919
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 221°F (105°C)

Quick Specs

Heyco® Nytye® Nylon Cable Ties

Regular Nytyes

- Smooth, radiused edges ensure that Nytyes won't cut into the cable's insulation–or the installer's hand.
- One-piece design reduces cost and installation time.
- Nytyes feature a bent tip for ease of pickup and insertion around small bundles. V-shaped raised ridges on the tip provide a sure grip.
- Close, evenly spaced teeth permit fine adjustment–from .025˝ (0,6 mm) on the smallest Nytyes to .063˝ (1,6 mm) on the largest.

Screw Mountable Nytyes

- Molded-in screw hole mount provides one-piece mounting and bundling.
- Mounting screws not included.

Push Mountable Nytyes

- Snap quickly into holes with only fingertip pressure.
- Provide one-piece mounting and bundling.
- Hold securely in panels up to 1/8˝ (3,2 mm) thick.

PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Max. Tensile Strength		Max. Bundle Diameter			UV		A Length		B Width	
Lbs.	N	in.	mm.	Natural	Black		in.	mm.	in.	mm.
NEW! Miniature										
18	80	0.63	16,0	**13100**	**13100B**	NT-18-031	3.15	80	.10	2,5
		0.86	21,8	**13102**	**13102B**	NT-18-040	4.00	100		
		1.18	30,0	**13105**	**13105B**	NT-18-047	4.72	120		
		1.40	35,6	**13107**	**13107B**	NT-18-059	5.90	150		
		1.60	40,6	**13108**	**13108B**	NT-18-060	6.00	160		
		2.00	50,8	**13111**	**13111B**	NT-18-080	8.00	200		
NEW! Intermediate										
40	135	0.86	21,8	**13120**	**13120B**	NT-40-040	4.00	100	.14	3,6
		1.18	30,0	**13121**	**13121B**	NT-40-047	4.72	120		
		1.30	33,0	**13122**	**13122B**	NT-40-055	5.51	140		
		1.40	35,6	**13123**	**13123B**	NT-40-059	5.90	150		
		1.65	41,9	**13124**	**13124B**	NT-40-070	7.08	180		
		2.00	50,8	**13126**	**13126B**	NT-40-080	8.00	200		
		2.60	66,0	**13128**	**13128B**	NT-40-098	9.84	250		
		3.00	76,2	**13129**	**13129B**	NT-40-110	11.00	280		
		3.30	83,8	**13130**	**13130B**	NT-40-118	11.80	300		
		4.01	101,9	**13134**	**13134B**	NT-40-145	14.57	370		
NEW! Standard										
50	225	1.18	30,0	**13140**	**13140B**	NT-50-047	4.72	120	.19	4,8
		1.60	40,6	**13142**	**13142B**	NT-50-063	6.30	160		
		1.65	41,9	**13143**	**13143B**	NT-50-070	7.09	180		
				13144	**13144B**	NT-50-075	7.50	190		
		2.00	50,8	**13145**	**13145B**	NT-50-078	7.87	200		
		2.60	66,0	**13147**	**13147B**	NT-50-098	9.84	250		
		3.00	76,2	**13149**	**13149B**	NT-50-110	11.02	280		
		3.30	83,8	**13151**	**13151B**	NT-50-118	11.81	300		
		3.54	89,9	**13153**	**13153B**	NT-50-137	13.77	350		
		4.01	101,9	**13155**	**13155B**	NT-50-145	14.56	370		
		4.13	104,9	**13156**	**13156B**	NT-50-157	15.74	400		
		5.11	129,8	**13158**	**13158B**	NT-50-177	17.70	450		
		5.90	149,9	**13160**	**13160B**	NT-50-196	19.68	500		
Screw Mountable										Screw #
30	133	1.00	25,4	**3550**	-	MNT 90	5.50	140	.12	2,9	4
40	178	1.25	31,8	**3555**	-	MNT 120	6.50	165	.14	3,4	8
50	222	1.75	44,4	**3560**	-	MNT 150	8.00	203	.19	4,8	10
Push Mountable										MH Diameter
40	180	1.42	36,0	-	**3907**	PWMS-155-HSB	6.23	158	.14	3,5	.19	4,6
50	222	1.75	44,4	**3904**	-	PMT 150	8.00	203	.19	4,8	.25	6,4

Standard colors natural and UV Black. Consult Heyco for colors and Extra Heavy Duty Nytyes.

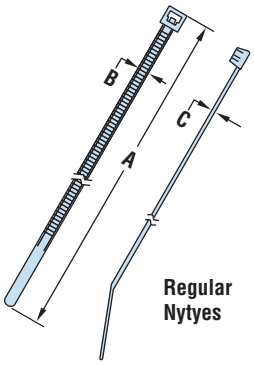

Regular Nytyes



Screw Mountable Nytyes

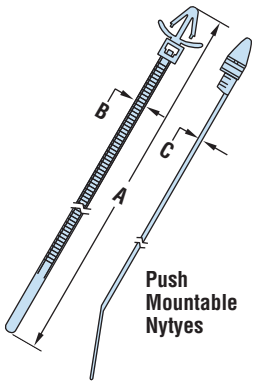

Push Mountable Nytyes

Heyco® Cable Tie Tensioning Tool

Part No. 0998 fits all standard duty Nytyes. Metal construction, has three tension settings, and automatically trims excess.

Quick Specs

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E54523
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C)

Heyco® Nytye® Mounting Platforms

NYTYE MAX. TENSILE STRENGTH lbs.	N	SCREW SIZE * no.	M	MAX. PANEL THICKNESS in.	mm.	NYTYE INSERT POINTS	PART NO. Natural	DESCRIPTION	FOOTPRINT in.	mm.
Flat Type		Adhesive-Back Mount								
18	80	-	-	-	-	4	**3591**	MP 4A-M	.50 x .50	12,7 x 12,7
40	178	-	-	-	-	4	**3594**	MP 4A-S	.80 x .80	20,3 x 20,3
50	222	8	4,6	-	-	2	**3590**	MP 2A†	1.10 x 1.10	27,9 x 27,9
				-	-	4	**3593**	MP 4A†	1.15 x 1.15	29,2 x 29,2
		Screw Mount								
40	178	6	3,5	-	-	4	**4264**	MP 4-S	.75 x .75	19,1 x 19,1
50	222	8	4,0	-	-	4	**4265**	MP 34	.38 x .75	9,5 x 19,0
						2	**3590**	MP 2A †	1.10 x 1.10	27,9 x 27,9
		8	4,6	-	-	4	**3593**	MP 4A †	1.15 x 1.15	29,2 x 29,2
Dart Type		Arrrowhead Mount								
50	222	.19	4,8	.05	1,2	2	**4266**	MP PM-19	.56 x .31	6,0 x 14,3
		.25	6,4	.11	2,8	2	**3762**	MP PM-25	.31 x .56	7,9 x 14,3
		.26	6,7	.35	9,0	2	**4267**	MP PM-26	.31 x .80	7,9 x 20,2
		Blind Mount **								
40	178	.31	7,9	.25	6,4	2	**4268**	MP PMB-31	.33 x .43	8,3 x 11,0
Saddle Type		Screw Mount								
18	80	4	3,0	-	-	2	**4269**	MP S-4	.33 x .51	8,3 x 13,0
50	222	8	4,0	-	-	2	**3759**	MP S-8	.38 x .63	9,5 x 15,9
120	534	10	5,0	-	-	2	**3753**	MP S-10	.63 x .88	15,9 x 22,2
Snap over-bolt installation-consult Heyco						2	**3754**	MP S-5/8††	1.25 x 2.31	31,8 x 58,7
Reverse		Button Mount								
50	222	.25	6,4	.13	3,2	2	**3592**	MP R-2	.42˝ (10,7 mm) dia. button	

Standard color natural.

* Data = Mounting Hole Diameter, for all **Dart Type** Mount Platforms.

Minimum Panel Thickness for **Blind Mount** Platforms.

† These adhesive-backed parts are also screw mountable.

††**Part No. 3754** standard color is black.

- Multiple sizes, strengths, and mounting options anchor Nytyes® securely.
- Four Types:
  1) Flat - Adhesive-Back and Screw Mounts
  2) Dart - Arrowhead and Blind Mounts
  3) Saddle - Screw Mount only
  4) Reverse - Button Mount only
- Apply Adhesive-Backed parts to a clean, dry surface.



MP 4A-M



MP 4A-S



MP 2A



MP 4A



MP 4S



MP 34



Dart Type 4266

Dart Type 3762, 4267



Blind Mount 4268



Saddle Type



MP S-5/8



MP R-2

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C) (Non-adhesive backed) -20°F (-29°C) to 150°F (66°C) (adhesive backed)

Quick Specs

ALL NEW PRODUCTS!

Heyco® Nytyes® with Stainless Steel Locking Device

- Non-magnetic stainless steel locking device for maximum strength.
- Notch-free tie design provides for precise locking positions.
- Serrated finger grip tail reduces slippage during installation.
- Stronger and lower profile than notched body ties.
- Rounded edge design protects cable insulation.
- Part Description Key: NTMP-XXX-YYY where XXX = tensile (foot pounds) and YYY = length (inches x 10)

PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS					
Min. Tensile Strength		Max. Bundle Diameter		Natural	Black		A Length		B Width		C Thickness	
Lbs.	N	in.	mm.				in.	mm.	in.	mm.	in.	mm.
18	80	.87	22,0	**13000**	**13000B**	NTMP-018-039	3.90	100	.12	3,0	.04	1,1
35	160	1.42	36,0	**13001**	**13001B**	NTMP-036-059	5.90	150	.16	4,0	.05	1,2
		2.09	53,0	**13002**	**13002B**	NTMP-036-079	7.90	200				
45	200	2.56	65,0	**13003**	**13003B**	NTMP-045-098	9.80	250	.20	5,0	.06	1,5
		2.99	76,0	**13004**	**13004B**	NTMP-045-118	11.80	300				
56	250	2.09	53,0	**13008**	**13008B**	NTMP-056-079	7.90	200	.31	8,0		
		2.60	66,0	**13009**	**13009B**	NTMP-056-094	9.40	240				
		2.99	76,0	**13010**	**13010B**	NTMP-056-118	11.80	300				
112	500	2.99	76,0	**13011**	**13011B**	NTMP-112-118	11.80	300				
		3.74	95,0	**13012**	**13012B**	NTMP-112-138	13.80	350				
124	550	4.45	113,0	**13013**	**13013B**	NTMP-112-157	15.70	400	.39	10,0	.07	1,7
		4.72	120,0	**13014**	**13014B**	NTMP-124-177	17.70	450				
		6.22	158,0	**13015**	**13015B**	NTMP-124-197	19.70	500				

Standard colors natural and UV Black.

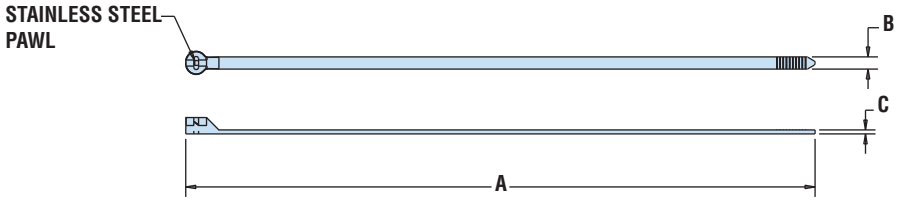

NTMP

Material	Nylon 6/6 Wire Tie with a Stainless Steel Locking Pawl
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 185°F (85°C)

Lower Cost Bulk Pack Available!

Heyco® Heavy Duty Stainless Steel Wire Cable Ties

- **Extremely durable, vinyl jacketed Stainless Steel Cable Tie.**
- Smooth vinyl jacketing prevents damage to installation cable insulation.
- Stainless steel crimp sleeve for easy field installation with electrician linesmen pliers, or wire cutters.
- UV protected vinyl jacket is excellent for solar installation where product durability is required.
- Use standard wire cutters to both crimp the sleeve and cut the excess wire.
- Covered by the Heyco Twenty Year Solar Warranty, visit solar power components section at Heyco.com.
- DFARS Compliant

PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Max. Tensile Strength		Max. Bundle Diameter		Bulk	100 Pack		A Length		B Diameter	
lbs.	N	in.	mm.				in.	mm.	in.	mm.
Black vinyl jacketed 302/304 stainless steel wire										
100	440	2.30	58,4	**S6408**	**S6409**	SunBundler® 8	8	203	.06	1,6
		2.92	74,2	**S6410**	**S6411**	SunBundler® 10	10	254		
		3.88	98,6	**S6412**	**S6413**	SunBundler® 12	12	305		
		4.20	106,7	**S6414**	**S6415**	SunBundler® 14	14	356		
		6.36	161,5	**S6420**	**S6421**	SunBundler® 20	20	508		

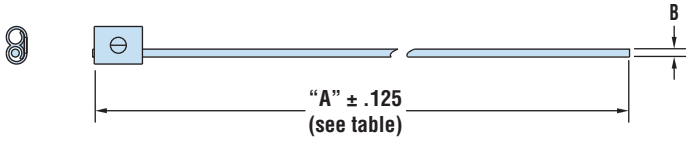

Material	Commercial Aircraft Grade 302/304 stainless wire w/UV protected vinyl jacket
Certifications	c UL us Certified by Underwriters' Laboratories for Compliance with both Canadian and U.S. Requirements under File E54523

ALL NEW PRODUCTS!

Heyco® Stainless Steel Cable Ties

Ball Lock Stainless Steel Strip Cable Ties - AISI 304*
- Standard and PVC Coated

PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Min. Tensile Strength		Max. Bundle Diameter		Standard Steel	PVC Coated Black		A Length		B Width	
Lbs.	N	in.	mm.				in.	mm.	in.	mm.
		1.18	30,0	**12801**	**12801B**	NTSS-0150-46A	5.91	150		
		2.05	52,0	**12802**	**12802B**	NTSS-0200-46A	7.87	200		
		2.68	68,0	**12803**	**12803B**	NTSS-0250-46A	9.84	250		
		3.23	82,0	**12805**	**12805B**	NTSS-0300-46A	11.81	300		
112	500	3.86	98,0	**12806**	**12806B**	NTSS-0350-46A	13.78	350	.18	4,6
		4.33	110,0	**12808**	**12808B**	NTSS-0400-46A	15.75	400		
		5.75	146,0	**12810**	**12810B**	NTSS-0500-46A	19.69	500		
		7.09	180,0	**12812**	**12812B**	NTSS-0600-46A	23.62	600		
		9.50	240,0	**12814**	**12814B**	NTSS-0800-46A	31.50	800		
		2.05	52,0	**12821**	**12821B**	NTSS-0200-79A	7.87	200		
		2.68	68,0	**12822**	**12822B**	NTSS-0250-79A	9.84	250		
		3.23	82,0	**12824**	**12824B**	NTSS-0300-79A	11.81	300		
		3.86	98,0	**12825**	**12825B**	NTSS-0350-79A	13.78	350		
		4.33	110,0	**12827**	**12827B**	NTSS-0400-79A	15.75	400		
250	1115	5.75	146,0	**12829**	**12829B**	NTSS-0500-79A	19.69	500	.31	7,9
		7.09	180,0	**12831**	**12831B**	NTSS-0600-79A	23.62	600		
		8.27	210,0	**12833**	**12833B**	NTSS-0700-79A	27.56	700		
		9.50	240,0	**12834**	**12834B**	NTSS-0800-79A	31.50	800		
		12.09	307,0	**12836**	**12836B**	NTSS-1000-79A	39.37	1000		

* AISI 316 available, consult Heyco.

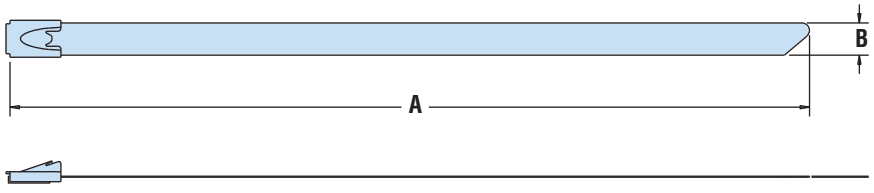

NTSS

- For ease of assembly, position locking head so the widest end is down.
- Part Description Key: NTSS-XXXX-YYA where XXXX = length (mm) and YYA = width (mm) with A indicating AISI 304 stainless steel.
- Stainless steel cable ties have more strength and better durability than nylon cable ties.
- Locking ball design for maximum holding strength and ease of installation.
- Coated ties offer additional protection and separation of dissimilar metals for improved corrosion resistance.
- Suitable for harsh outdoor environments; conform to standard IEC92 for Marine Electrical Appliances and the requirements of CB1113-85 "Plastic Covered Metal Cable Ties", "Steel Sea Boats Construction Level Standard."
- Secure bundles in moist and high temperature environments with decay, fire, corrosion, and radio resistance.
- Widely used in shipping, communication, and flight applications.
- .010" (0,25 mm) thick.
- Custom lengths available.
- 100 pack standard.

Materials	304 stainless steel with PVC coating

Quick Specs

Heyco® Beaded Ties

TENSILE STRENGTH		MAXIMUM BUNDLE DIAMETER		OVERALL LENGTH		DESCRIPTION	PART NO.				
							Black	Natural	Blue	Red	Yellow
lbs.	N	in.	mm.	in.	mm.						
Polyethylene – For Flexibility											
10	45	1-1/8	28,6	4.28	109	BT 4 PE	**3419**	**3420**	**3421**	**3422**	**3423**
		1-3/8	35,0	5.05	128	BT 5 PE	**3424**	**3425**	**3426**	**3427**	**3428**
18	80	1-7/8	48,0	6.62	168	BT 6 PE	**3429**	**3430**	**3431**	**3432**	**3433**
		2-1/2	64,0	8.90	226	BT 8 PE	**3434**	**3435**	**3436**	**3437**	**3438**
		3	76,0	10.78	274	BT 10 PE	**3439**	**3440**	**3441**	**3442**	**3443**
		4	101,6	14.00	356	BT 14 PE	**3484**	**3480**	**3476**	**3482**	**3483**
Nylon – For Strength											
40	180	1-1/8	28,6	4.25	108	BT 4 N	**3509**	**3490**			
		1-3/8	35,0	5.00	127	BT 5 N	**3519**	**3491**			
		1-7/8	48,0	6.75	171	BT 6 N	**3523**	**3492**			
75	338	2-1/2	64,0	9.00	229	BT 8 N	**3524**	**3493**			
		3	76,0	11.00	279	BT 10 N	**3495**	**3494**			
		4	101,6	15.00	381	BT 14 N	**3498**	**3496**			

Standard colors: PE-black, natural, blue, red, and yellow. N–Black and natural.

- **Releasable and reusable** ties for easy bundling, closing, bagging, holding, and tying.
- Polyethylene for high flexibility and moderate strength.
- Multiple sizes for bundles up to 4˝ (101,6 mm) diameter.

- **Mounting Platform for Beaded Ties**
  - –Part No. 3750
  - –Adhesive backed
  - –May also be screw mounted
  - –Molded of natural nylon. Consult Heyco for other colors

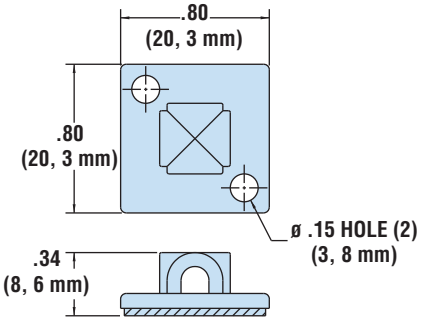

TOP VIEW



SIDE VIEW

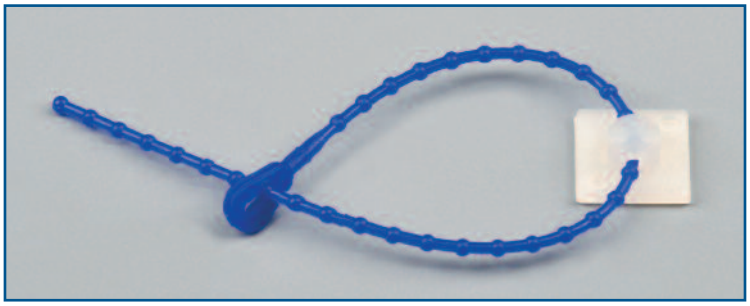

Quick Specs

Material	Polyethylene or Nylon
Flammability Rating	94V-2
Temperature Range	40°F (0°C) to 221°F (85°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

Heyco® Braided Sleeving

BUNDLE RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS			
Minimum Diameter		Maximum Diameter		Black	FR Black		Nominal Diameter		Quantity Per Spool	
in.	mm.	in.	mm.				in.	mm.	ft.	mtrs.
.09	2,3	.25	6,4	**8980**	**8983**	BS 125	.13	3,2	1000	305
.13	3,2	.44	11,1	**8985**	**8988**	BS 250	.25	6,4		
.25	6,4	.75	19,1	**8990**	**8993**	BS 500	.50	12,7	500	152
.50	12,7	1.25	31,8	**8995**	**8998**	BS 750	.75	19,1	250	76
.75	19,1	1.75	44,5	**9000**	**9003**	BS 1250	1.25	31,8		
1.25	31,8	2.75	69,9	**9005**	**9008**	BS 1750	1.75	44,5	200	61
1.50	38,1	3.50	88,9	**9010**	**9013**	BS 2.0	2.00	50,8		

Standard color black.
FR sleeving flammability rating–UL VW-1.

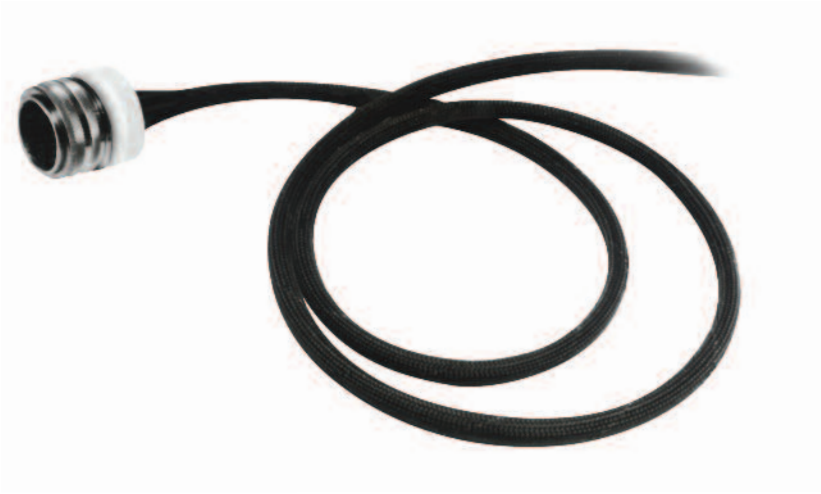

- **Braided sleeve slips on quickly and is self-fitting** over irregular shapes and contours. No wire pulling compounds are required due to its low surface friction. Slight tensioning after application makes for an even tighter fit.
- Expandable up to three times its own diameter, the open-weave construction can fit many applications, simplifying inventory. The open-weave allows for easy inspection of sleeved components and easy break out of individual cables.
- Full cable flexibility is maintained in any direction, even at low temperatures. Wires encased in Heyco Braided Sleeving can flex and bend as readily as if they had no protective oversleeving. Bundles can be flexed repeatedly without damage.
- Tough, cut-resistant sleeving is designed for protecting wire bundles and harnesses, hoses, tubing, and cable assemblies from mechanical damage and environmental hazards.
- The high tensile strength, damage-resistant filament braid:
  1) protects against rough surfaces, sharp edges or corners
  2) resists scuffing and abrasion
  3) cushions against vibration and impact damage
  4) prevents condensation while allowing complete drainage
  5) dissipates heat and moisture
  6) does not degrade in most fluid environments
- Sleeved components are more organized and attractive!
- Preferred cutting method: hot knife.

Materials	Polyester Monofilament Yarns or Flame Retardant Polyester Yarn
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E173954
Monofilament Diameter	.010˝
Temperature Range	-103°F (-75°C) to 257°F (125°C)

Quick Specs

Heyco® Hose and Cable Wrap-Polyethylene

- Easy to use: Just twist on wire!
- Allows breakouts of single/multiple wires and re-routing of replacement wires.
- Absorbs vibration, insulates cables and hose, and resists abrasion.
- Multiple sizes bundle and protect cables, wires, tubing, and hoses from .13˝ (3,2 mm) to 7.00˝ (177,8 mm) diameters.
- Conforms to: Fed Spec LP390, Mil I-631D, Mil P-21922B
- For hose and cable **clamps** see pages 30 through 35.

Standard

BUNDLE RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS					
Minimum Diameter		Maximum Diameter		UV Black	Natural		A Outside Diameter		B Pitch		C Thickness	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.
.13	3,2	1.50	38,1	**8904**	**8905**	CW 187 PE*	.19	4,8	.25	6,3	.03	0,8
.19	4,8	2.00	50,8	**8908**	**8909**	CW 250 PE	.25	6,3	.38	9,5	.05	1,1
.31	7,9	3.00	76,2	**8912**	**8913**	CW 375 PE	.38	9,5	.44	11,1	.05	1,3
.38	9,5	4.00	101,6	**8916**	**8917**	CW 500 PE	.50	12,7	.50	12,7	.06	1,6
.50	12,7	4.50	114,3	**8920**	**8921**	CW 625 PE*	.63	15,9	.63	15,9	.06	1,6
		5.00	127,0	**8924**	**8925**	CW 750 PE	.75	19,1	.75	19,1	.07	1,7
1.00	25,4	7.00	177,8	**8928**	**8929**	CW 1000 PE	1.00	25,4	1.00	25,4	.08	2,0

Standard colors UV black or natural.
* Parts are not UR recognized.

Heavy Duty

- Designed to shield hydraulic, pneumatic, and high pressure hoses; cables and cable bundles.
- Available in a **variety of sizes** that fit cable, cable bundles and hoses from .75˝ (19,1 mm) to 6˝ (152,4 mm) in diameter.
- **Smooth finish interior** wall.
- May be **color coded** (see tabular chart).
- Packaged as one continuous piece, not spooled.
- May be **cut to desired length**, please consult Heyco.

BUNDLE RANGE				PART NO.			DESCRIPTION	PART DIMENSIONS					
Minimum Diameter		Maximum Diameter		Black	Color Coded			A Outside Dia.		B Pitch		C Thickness	
in.	mm.	in.	mm.					in.	mm.	in.	mm.	in.	mm.
.75	19,1	1.50	38,1	**8964**	**8965**	Red	CWG 99 PE	.93	23,6	.95	24,1	.12	3,0
1.00	25,4	2.00	50,8	**8966**	**8967**	Blue	CWG 126 PE	1.12	28,4	1.25	31,8	.13	3,3
1.25	31,8	2.50	63,5	**8968**	**8969**	Green	CWG 153 PE	1.37	34,8	1.35	34,3	.14	3,5
1.50	38,1	3.00	76,2	**8970**	**8971**	Yellow	CWG 181 PE	1.62	41,1	1.50	38,1	.15	3,9
2.00	50,8	3.50	88,9	**8972**	**8973**	Orange	CWG 234 PE	2.09	53,1	1.60	40,6	.17	4,3
3.50	88,9	6.00	152,4	**8974**	**8975**	Gray	CWG 401 PE	3.50	88,9	1.95	49,5	.25	6,4

*Standard color black or color coded.

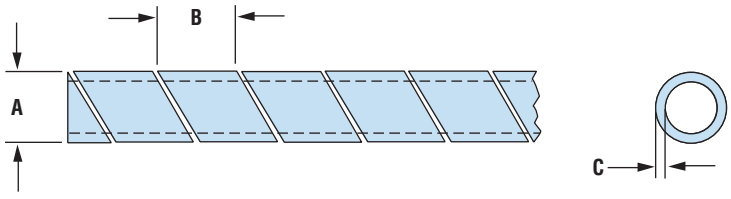

Quick Specs

Material	Polyethylene (Standard), High Density Polyethylene (Heavy Duty)
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E173954. (Standard Only)
Temperature Range	-76°F (-60°C) to 190°F (88°C) UL rated temp not to exceed 122°F (50°C) (Standard) 0°F (-18°C) to 165°F (74°C) (Heavy Duty)

Heyco® Hose and Cable Wrap-Nylon

BUNDLE RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS					
Minimum Diameter		Maximum Diameter		UV Black	Natural		A Outside Diameter		B Pitch		C Thickness	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.
.13	3,2	1.50	38,1	**8936**	**8937**	CW 187 N*	.19	4,8	.25	6,3	.02	0,5
.19	4,8	2.00	50,8	**8940**	**8941**	CW 250 N	.25	6,3	.38	9,5	.03	0,6
.31	7,9	3.00	76,2	**8944**	**8945**	CW 375 N	.38	9,5	.44	11,1	.04	0,9
.38	9,5	4.00	101,6	**8948**	**8949**	CW 500 N	.50	12,7	.50	12,7		
.50	12,7	4.50	114,3	**8952**	**8953**	CW 625 N*	.63	15,9	.63	15,9		
		5.00	127,0	**8956**	**8957**	CW 750 N	.75	19,0	.75	19,1	.03	0,8
1.00	25,4	7.00	177,8	**8960**	**8961**	CW 1000 N	1.00	25,4	1.00	25,4		

Standard colors UV black or natural.
* Parts are not UL recognized.

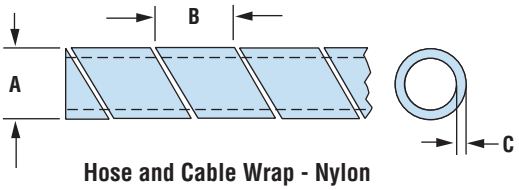

Hose and Cable Wrap - Nylon



Heyco-Flex™ V Slit Tubing - Nylon

- Easy to use: Just twist on wire!
- Allows breakouts of single/multiple wires and re-routing of replacement wires.
- Absorbs vibration, insulates cables, and resists abrasion.
- Multiple sizes bundle and protect cables, wires, tubing, and hoses from .13″ (3,2 mm) to 7.00″ (177,8 mm) diameters.
- Available in UV black or natural nylon color.
- Conforms to: ASTM D 4066, Group 2; Fed Spec LP410A
- For hose and cable **clamps**, see pages 30 through 35.

Heyco-Flex™ V Nylon Slit Tubing

NOMINAL DIAMETER	PART NO.	DESCRIPTION	PART DIMENSIONS						ROLL LENGTH
	Black		A Outside Diameter		B Inside Diameter		Wall Thickness Range		
in.			in.	mm.	in	mm.	in.	mm.	ft.
1/8	**1634A**	HF5 1/8	.26	6,6	.17	4,3			
1/4	**1635A**	HF5 1/4	.39	9,9	.29	7,3			
11/32	**1636A**	HF5 11/32	.51	13,0	.35	8,8			
3/8	**1637A**	HF5 3/8	.53	13,5	.42	10,5			
7/16	**1638A**	HF5 7/16	.63	15,9	.44	11,2			
1/2	**1639A**	HF5 1/2	.64	16,2	.53	13,3	.01-.02	0,2-0,5	100
5/8	**1641A**	HF5 5/8	.81	20,5	.66	16,8			
3/4	**1642A**	HF5 3/4	.93	23,6	.79	20,1			
1	**1643A**	HF5 1	1.12	28,5	.92	23,3			
1-1/16	**1644A**	HF5 1-1/16	1.22	30,9	1.01	25,6			
1-1/4	**1646A**	HF5 1-1/4	1.49	37,9	1.28	32,6			
1-1/2	**1649A**	HF5 1-1/2	1.73	43,9	1.47	37,2			

Standard color black.

	CW
Material	Nylon
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E173954
Temperature Range	-40°F (-40°C) to 250°F (121°C) – UL rated temp not to exceed 149°F (65°C)

	HF5
Material	Polyamide 6 Nylon
Flammability Rating	94HB
Temperature Range	-40°F (-40°C) to 239°F (115°C) Continuous -40°F (-40°C) to 374°F (190°C) Intermittent

- **Slit design allows side entry** and encirclement of preassembled harnesses and capillary tubes.
- Unique slit design allows for wire breakouts.
- Heyco-Flex V is lightweight and flexible, yet durable enough to meet your wire management requirements.
- Multiple sizes 1/8″ to 1-1/2″.
- All nylon construction resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents.
- Quick installation; cuts with utility knife, PVC cutter or Heyco cutting tool #8340. See page 2-2 in the Heyco Catalog.

Quick Specs

STANDARD PACK 1,000/BAG

HEYClip™ Snap Rivets

- Designed for **fast and easy installation with no tools** - just fingertip pressure required.
- Simply place rivet into the hole and press down on the head to fasten; legs expand to securely fasten components.
- To release, simply pull up on rivet head section.
- Round head provides a clean, finished look.
- Part Description Key: PR X-Y where X = Mounting Hole Diameter (inches) and Y = minimum Panel Thickness (inches).
- Standard Material: Nylon 6. Nylon 6/6 UL 94V-0 available by special order, consult Heyco.
- Standard Pack - 1,000/bag.

WILL FIT THESE PANELS						PART NO.			DESCRIPTION	PART DIMENSIONS						EXTRACTION FORCE	
MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS								A Length		B Head Height		C Head Diameter			
		Min.		Max.				V-0									
in.	mm.	in.	mm.	in.	mm.	Black	White	Black *		in.	mm.	in.	mm.	in.	mm.	N	Style
PR Series																	
.083	2,1	.02	0,6	.05	1,2	**9296**	**9297**	**9296F**	PR 083-024	.10	2,4	.05	1,2	.17	4,2	29	2
		.05	1,3	.08	2,0	**9300**	**9301**	**9300F**	PR 083-051	.13	3,2						
		.08	2,1	.11	2,8	**9302**	**9303**	**9302F**	PR 083-083	.16	4,0						
		.11	2,9	.14	3,6	**9304**	**9305**	**9304F**	PR 083-114	.19	4,8						
		.15	3,7	.17	4,4	**9306**	**9307**	**9306F**	PR 083-146	.22	5,6						
		.17	4,4	.20	5,0	**9308**	**9309**	**9308F**	PR 083-173	.25	6,4						
.102	2,6	.04	1,0	.08	2,0	**9020**	**9021**	**9020F**	PR 102-039	.13	3,2	.06	1,4	.20	5,0	49	2
		.08	2,0	.12	3,0	**9022**	**9023**	**9022F**	PR 102-082	.17	4,2						
		.11	2,7	.14	3,6	**9024**	**9025**	**9024F**	PR 102-106	.19	4,8						
		.13	3,4	.17	4,3	**9026**	**9027**	**9026F**	PR 102-134	.22	5,6						
		.17	4,3	.21	5,2	**9310**	**9311**	**9310F**	PR 102-169	.25	6,4						
		.20	5,1	.24	6,0	**9312**	**9313**	**9312F**	PR 102-201	.28	7,2						
.122	3,1	.04	1,0	.08	2,0	**9028**	**9029**	**9028F**	PR 122-039	.14	3,5	.06	1,6	.25	6,4	78	2
		.08	2,0	.12	3,0	**9030**	**9031**	**9030F**	PR 122-079	.18	4,5						
		.12	3,0	.16	4,0	**9032**	**9033**	**9032F**	PR 122-118	.22	5,6						
		.16	4,0	.19	5,0	**9034**	**9035**	**9034F**	PR 122-157	.26	6,5						
		.20	5,0	.24	6,0	**9036**	**9037**	**9036F**	PR 122-197	.30	7,5						
		.22	5,5	.26	6,5	**9038**	**9039**	**9038F**	PR 122-217	.32	8,0						
		.26	6,5	.30	7,5	**9040**	**9041**	**9040F**	PR 122-256	.35	9,0						
		.30	7,5	.34	8,5	**9042**	**9043**	**9042F**	PR 122-295	.39	10,0						
		.45	11,5	.51	13,0	**9314**	**9315**	**9314F**	PR 122-453	.57	14,5						
		.81	20,5	.85	21,5	**9316**	**9317**	**9316F**	PR 122-807	.91	23,0						
.142	3,6	.05	1,2	.08	2,1	**9044**	**9045**	**9044F**	PR 142-047	.14	3,5	.06	1,6	.25	6,4	118	1
		.08	2,1	.12	3,0	**9046**	**9047**	**9046F**	PR 142-083	.18	4,5						
		.11	2,7	.14	3,6	**9048**	**9049**	**9048F**	PR 142-106	.20	5,0						
		.12	3,0	.16	4,0	**9050**	**9051**	**9050F**	PR 142-118	.22	5,6						
		.15	3,7	.18	4,6	**9052**	**9053**	**9052F**	PR 142-146	.24	6,0						
		.18	4,5	.22	5,5	**9054**	**9055**	**9054F**	PR 142-177	.28	7,0						
		.22	5,5	.26	6,5	**9056**	**9057**	**9056F**	PR 142-217	.32	8,0						
.161	4,1	.10	2,5	.14	3,5	**9058**	**9059**	**9058F**	PR 161-098	.20	5,0	.07	1,8	.32	8,0	196	1
		.14	3,5	.18	4,5	**9060**	**9061**	**9060F**	PR 161-138	.24	6,0						
		.18	4,5	.22	5,5	**9062**	**9063**	**9062F**	PR 161-177	.28	7,0						
		.22	5,5	.26	6,5	**9064**	**9065**	**9064F**	PR 161-217	.32	8,0						
		.26	6,5	.30	7,5	**9066**	**9067**	**9066F**	PR 161-256	.35	9,0						
		.30	7,5	.34	8,5	**9068**	**9069**	**9068F**	PR 161-295	.39	10,0						
		.35	9,0	.41	10,5	**9318**	**9319**	**9318F**	PR 161-354	.47	12,0						
		.49	12,5	.55	14,0	**9320**	**9321**	**9320F**	PR 161-492	.61	15,5						

Standard colors black and white.
*Black nylon 6/6 UL 94V-0.



STYLE 1

STYLE 2

Quick Specs

Material	Nylon 6 UL V-2
Flammability Rating	94V-2
Temperature Range	-.4°F (-18°C) to 185°F (85°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

STANDARD PACK 1,000/BAG

HEYClip™ Snap Rivets – continued

WILL FIT THESE PANELS MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS Min.		Max.		PART NO. Black	White	V-0 Black *	DESCRIPTION	PART DIMENSIONS A Length		B Head Height		C Head Diameter		EXTRACTION FORCE N	Style
in.	mm.	in.	mm.	in.	mm.					in.	mm.	in.	mm.	in.	mm.		
PR Series																	
		.06	1,5	.10	2,5	**9070**	**9071**	**9070F**	PR 201-059	.18	4,5						
		.10	2,5	.14	3,5	**9072**	**9073**	**9072F**	PR 201-098	.22	5,6						
		.14	3,5	.18	4,5	**9074**	**9075**	**9074F**	PR 201-138	.26	6,5						
.201	5,1	.18	4,5	.22	5,5	**9076**	**9077**	**9076F**	PR 201-177	.30	7,5	.09	2,2	.35	9,0	245	
		.22	5,5	.26	6,5	**9078**	**9079**	**9078F**	PR 201-217	.34	8,5						
		.26	6,5	.30	7,5	**9080**	**9081**	**9080F**	PR 201-256	.37	9,5						
		.30	7,5	.34	8,5	**9082**	**9083**	**9082F**	PR 201-295	.41	10,5						1
.232	5,9	.12	3,0	.16	4,0	**9322**	**9323**	**9322F**	PR 232-118	.25	6,3	.11	2,7	.47	12,0	245	
.240	6,1	.10	2,5	.16	4,0	**9084**	**9085**	**9084F**	PR 240-098	.24	6,0	.10	2,5	.47	12,0	294	
		.14	3,5	.22	5,5	**9324**	**9325**	**9324F**	PR 240-138	.32	8,0	.12	3,0				

Standard colors black and white.
*Black nylon 6/6 UL 94V-0.



STYLE 1

- Designed for **fast and easy installation with no tools** - just fingertip pressure required.
- Simply place rivet into the hole and press down on the head to fasten; legs expand to securely fasten components.
- To release, simply pull up on rivet head section.
- Round head provides a clean, finished look.
- Part Description Key: PR X-Y where X = Mounting Hole Diameter (inches) and Y = minimum Panel Thickness (inches).
- Standard Material: Nylon 6. Nylon 6/6 UL 94V-0 available by special order, consult Heyco.
- Standard Pack - 1,000/bag.
- See Quick Specs on page 62.

ALL NEW PRODUCTS!

HEYClip™ Heat Resistant Snap Rivets

WILL FIT THESE PANELS MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS Min.		Max.		PART NO. Tan Nylon 4/6 UL94V-2	DESCRIPTION	PART DIMENSIONS A Length		B Head Height		C Head Diameter		EXTRACTION FORCE N	Style
in.	mm.	in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.		
PR Tan Series															
		.04	1,0	.08	2,0	**9028H**	PR 122-039 HR Tan	.14	3,5						
		.08	2,0	.12	3,0	**9030H**	PR 122-079 HR Tan	.18	4,5						
.122	3,1	.12	3,0	.16	4,0	**9032H**	PR 122-118 HR Tan	.22	5,6	.06	1,6	.25	6,4	78	2
		.16	4,0	.19	5,0	**9034H**	PR 122-157 HR Tan	.26	6,5						
		.22	5,5	.26	6,5	**9038H**	PR 122-217 HR Tan	.32	8,0						
		.05	1,2	.08	2,1	**9044H**	PR 142-047 HR Tan	.14	3,5						
.142	3,6	.08	2,1	.12	3,0	**9046H**	PR 142-083 HR Tan	.18	4,5	.06	1,6	.25	6,4	118	1
		.11	2,7	.14	3,6	**9048H**	PR 142-106 HR Tan	.20	5,0						
		.12	3,0	.16	4,0	**9050H**	PR 142-118 HR Tan	.22	5,6						
		.10	2,5	.14	3,5	**9058H**	PR 161-098 HR Tan	.20	5,0						
		.14	3,5	.18	4,5	**9060H**	PR 161-138 HR Tan	.24	6,0						
.161	4,1	.18	4,5	.22	5,5	**9062H**	PR 161-177 HR Tan	.28	7,0	.07	1,8	.32	8,0	196	1
		.22	5,5	.26	6,5	**9064H**	PR 161-217 HR Tan	.32	8,0						
		.30	7,5	.34	8,5	**9068H**	PR 161-295 HR Tan	.39	10,0						

Standard color tan (beige).

- Molded from Nylon 4/6 94V-2 - **heat resistant to 266°F (130°C)**.
- Automotive **tan** (beige) color.
- Designed for fast and easy installation with no tools - just fingertip pressure required.
- Simply place rivet into the hole and press down on the head to fasten; legs expand to securely fasten components.
- Part Description Key: PR X-Y where X = Mounting Hole Diameter (inches) and Y = minimum Panel Thickness (inches).
- Standard Pack - 1,000/bag.

Quick Specs

Material	Nylon 4/6
Flammability Rating	94V-2
Temperature Range	-.4°F (-18°C) to 266°F (130°C)

STANDARD PACK 1,000/BAG

ALL NEW PRODUCTS!

HEYClip™ Countersunk Type H Rivets

- Flat, **chamfered rivet head** for **easier disassembly** when required.
- Accommodate countersunk hole specification DIN ISO 7721.
- The "H" type rivet is designed with a flat head for fast and easy installation, without any tools.
- Simply place rivet into the hole and press down on the head to fasten.
- Part Description Key: PRH X-Y where X = Mounting Hole Diameter (inches) and Y = minimum Panel Thickness (inches).
- Standard Material: Nylon 6. Nylon 6/6 UL 94V-0 available by special order, consult Heyco.
- Standard Pack - 1,000/bag.

WILL FIT THESE PANELS						PART NO.			DESCRIPTION	PART DIMENSIONS						EXTRACTION FORCE	
MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS								A Length		B Head Height		C Head Diameter			
		Min.		Max.		Black	White	V-0 Black									Style
in.	mm.	in.	mm.	in.	mm.			*		in.	mm.	in.	mm.	in.	mm.	N	
PRH Series																	
.102	2,6	.22	5,5	.26	6,5	**9118**	**9119**	**9118F**	PRH 102-217	.33	8,5	.03	0,7	.18	4,6	49	1
.122	3,1	.04	1,0	.08	2,0	**9156**	**9157**	**9156F**	PRH 122-039	.14	3,5	.04	1,0	.25	6,4	78	1
		.08	2,0	.12	3,0	**9158**	**9159**	**9158F**	PRH 122-079	.18	4,5						
		.12	3,0	.16	4,0	**9160**	**9161**	**9160F**	PRH 122-118	.22	5,5						
		.16	4,0	.19	5,0	**9162**	**9163**	**9162F**	PRH 122-157	.26	6,5	.04	1,0	.24	6,0		
		.20	5,0	.24	6,0	**9164**	**9165**	**9164F**	PRH 122-197	.31	7,5						
		.22	5,5	.26	6,5	**9166**	**9167**	**9166F**	PRH 122-217	.32	8,0						
		.26	6,5	.30	7,5	**9168**	**9169**	**9168F**	PRH 122-256	.35	9,0	.04	1,0	.25	6,4		
		.30	7,5	.34	8,5	**9170**	**9171**	**9170F**	PRH 122-295	.39	10,0						
.142	3,6	.04	1,0	.08	2,0	**9172**	**9173**	**9172F**	PRH 142-039	.14	3,5	.04	1,0	.25	6,4	118	2
		.08	2,0	.12	3,0	**9174**	**9175**	**9174F**	PRH 142-079	.19	4,5						
		.12	3,0	.16	4,0	**9176**	**9177**	**9176F**	PRH 142-118	.22	5,5	.04	1,0	.24	6,0		
		.14	3,5	.18	4,5	**9178**	**9179**	**9178F**	PRH 142-138	.24	6,0						
		.18	4,5	.22	5,5	**9180**	**9181**	**9180F**	PRH 142-177	.28	7,0						
		.22	5,5	.26	6,5	**9182**	**9183**	–	PRH 142-217	.32	8,0						

Standard colors black and white.
*Black nylon 6/6 UL 94V-0.

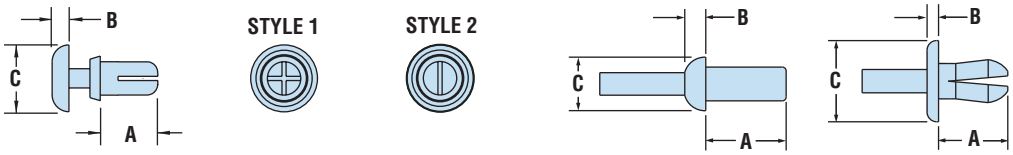

PRH Series

DR Series

HEYClip™ Push (aka Drive) Rivets

- Install by placing rivet into hole and pushing the drive pin into the rivet to expand legs and lock in place.
- No tools required.
- Part Description Key: DR X-Y where X = Mounting Hole Diameter (inches) and Y = minimum Panel Thickness (inches).
- Standard Pack - 1,000/bag.

WILL FIT THESE PANELS						PART NO.		DESCRIPTION	PART DIMENSIONS						
MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS							A Length		B Head Height		C Head Diameter		
		Min.		Max.		Black	Natural								
in.	mm.	in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	
DR Series															
.161	4,1	.10	2,5	.14	3,5	**9141**	**9142***	DR 161-098	.20	5,0	.09	2,2	.31	8,0	
.187	4,8	.04	1,0	.38	9,5	**9184**	**9185**	DR 189-039	.42	10,7	.06	1,5	.28	7,1	
		.16	4,0	.28	7,1	**9186**	**9187**	DR 189-158	.38	9,7	.06	1,5	.43	10,9	
.218	5,5	.09	2,4	.16	4,0	**9188**	**9189**	DR 217-094	.45	11,4	.08	2,0	.37	9,4	
.250	6,4	.06	1,5	.25	6,4	**9190**	**9191**	DR 252-059	.37	9,3	.19	4,7	.44	11,1	
		.28	7,1	.50	12,7	**9192**	**9193**	DR 252-280	.62	15,8	.08	2,0	.47	11,9	

Standard colors black and natural.
*Standard color white.

Quick Specs

Material	**PRH Series** - Nylon 6 **DR Series** - Nylon 6/6
Flammability Rating	94V-2
Temperature Range	-.4°F (-18°C) to 185°F (85°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

ALL NEW PRODUCTS!

STANDARD PACK 1,000/BAG

HEYClip™ Releasable Type T Rivets

WILL FIT THESE PANELS MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS Min.		Max.		PART NO. Black	White	DESCRIPTION	PART DIMENSIONS A Length		B Head Height		C Head Diameter		STYLE
in.	mm.	in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	
KR Series															
.122	3,1	.04	1,0	.08	2,0	**9088**	**9089**	KR 122-039	.14	3,5	.32	8,0	.39	10,0	1
		.08	2,0	.12	3,0	**9090**	**9091**	KR 122-079	.18	4,5					
		.12	3,0	.16	4,0	**9092**	**9093**	KR 122-118	.22	5,5					
		.16	4,0	.20	5,0	**9094**	**9095**	KR 122-157	.26	6,5					
		.20	5,0	.24	6,0	**9194**	**9195**	KR 122-197	.30	7,5					
		.22	5,5	.26	6,5	**9096**	**9097**	KR 122-217	.32	8,0					
.142	3,6	.04	1,0	.08	2,0	**9098**	**9099**	KR 142-039	.14	3,5	.32	8,0	.39	10,0	2
		.08	2,0	.12	3,0	**9100**	**9101**	KR 142-079	.18	4,5					
		.12	3,0	.16	4,0	**9102**	**9103**	KR 142-118	.22	5,5					
		.14	3,5	.18	4,5	**9104**	**9105**	KR 142-137	.24	6,0					
		.18	4,5	.22	5,5	**9106**	**9107**	KR 142-177	.28	7,0					
		.22	5,5	.26	6,5	**9196**	**9197**	KR 142-217	.32	8,0					
.161	4,1	.10	2,5	.14	3,5	**9108**	**9109**	KR 161-098	.20	5,0	.32	8,0	.47	12,0	2
		.14	3,5	.18	4,5	**9110**	**9111**	KR 161-137	.24	6,0					
		.18	4,5	.22	5,5	**9112**	**9113**	KR 161-177	.28	7,0					
		.22	5,5	.26	6,5	**9114**	**9115**	KR 161-217	.32	8,0					
		.26	6,5	.30	7,5	**9198**	**9199**	KR 161-256	.35	9,0					
		.30	7,5	.34	8,5	**9116**	**9117**	KR 161-295	.39	10,0					

Standard colors black and white.



KR Series



DF Series

- The "T" style rivet is designed with a **large finger grip**, knob-shaped head for optimal installation and removal by simply pushing or pulling the rivet from the hole.
- Can be used multiple times.
- Part Description Key: KR X-Y where X = Mounting Hole Diameter (inches) and Y = minimum Panel Thickness (inches).
- Standard Material: Nylon 6. Nylon 6/6 UL 94V-0 available by special order, consult Heyco.
- Standard Pack - 1,000/bag.

HEYClip™ Drive Fasteners

WILL FIT THESE PANELS MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS Min.		Max.		PART NO. Black	Natural	DESCRIPTION	PART DIMENSIONS A Length		B Head Height		C Head Diameter	
in.	mm.	in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.
DF Series														
.125	3,2	.04	1,0	.18	4,5	**9201**	**9202**	DF 125-039	.51	13,0	.06	1,5	.31	8,0
.154	3,9	.04	1,0	.20	5,0	**9203**	**9204**	DF 154-039	.55	14,0	.06	1,6	.35	9,0
.185	4,7	.04	1,0	.22	5,5	**9205**	**9206**	DF 185-039	.59	15,0	.07	1,7	.39	10,0
						9126	**9127**	DF 185-039-1	.59	15,0	.11	2,9	.43	11,0
.250	6,4	.06	1,5	.26	6,5	**9128**	**9129**	DF 250-059	.67	17,0	.08	2,0	.47	12,0
.307	7,8	.06	1,5	.28	7,0	**9207**	**9208**	DF 307-059	.75	19,0	.09	2,2	.55	14,0
.217	5,5	.24	6,0	.35	9,0	**9209**	**9210**	DF 217-236	.71	18,0	.08	2,0	.47	12,0

Standard colors black and natural.

- Heyco Drive Fasteners help secure and fasten components and/or panels to a wide variety of materials such as wood, metal, particle board, plastic and rubber.
- Hollow body design increases flexibility, for easy installation.
- Part Description Key: DF XXX-YYY where XXX = Mounting Hole Diameter (inches) and YYY = minimum Panel Thickness (inches).

	KR Series	DF Series
Material	Nylon 6	Acetal (POM)
Flammability Rating	94V-2	94-HB
Temperature Range	-.4°F (-18°C) to 185°F (85°C)	-.4°F (-18°C) to 220°F (104°C)

Quick Specs

ALL NEW PRODUCTS!



PRP Series Style 1



PRP Series Style 2

HEYClip™ Type P Snap Rivets

Polysulfone High Temperature Snap Rivets

WILL FIT THESE PANELS						PART NO.	DESCRIPTION	PART DIMENSIONS						STYLE
MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS						A Length		B Head Height		C Head Diameter		
		Min.		Max.										
in.	mm.	in.	mm.	in.	mm.	Black		in.	mm.	in.	mm.	in.	mm.	
PRP Series														
		.078	2.0	.118	3.0	**9349**	PRP 122-079	.18	4,5					
.122	3,1	.118	3.0	.157	4.0	**9350**	PRP 122-118	.22	5,6	.06	1,6	.25	6,4	1
.161	4,1	.157	4.0	.197	5.0	**9351**	PRP 122-157	.26	6,5	.04	1,0	.28	7,0	2

Standard color black.

SSRP Series

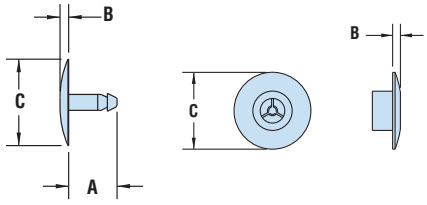

SSRPT Series



4714



RR Series

HEYClip™ Shorty Snap Rivets

Two Piece Snap Together Rivets

WILL FIT THESE PANELS				PART NO.	DESCRIPTION	PART DIMENSIONS						STYLE
MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS				A Length		B Head Height		C Head Diameter		
				Natural								
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	
SSRP Series - Pin fits a .125˝ (3,2 mm) diameter hole												
.125	3,2	.030	0,8	**4064**	SSRP-030	.06	1,6	.09	2,3	.40	10,2	1
		.062	1,6	**4065**	SSRP-062	.10	2,4					
		.100	2,5	**4069**	SSRP-100	.13	3,4					
		.125	3,2	**4071**	SSRP-125	.16	4,0					
		.187	4,8	**4073**	SSRP-187	.22	5,6					
		.250	6,4	**4075**	SSRP-250	.28	7,2					
FEMALE CAP for the above parts				**4077**	SSRC	n/a		.10	2,5	.40	10,2	2
SSRPT Series - Cap fits a .320˝ (8,1 mm) diameter hole												
.320	8,1	.170 - .190	4,3 - 4,8	**4715**	SSRPT-190	.21	5,3	.06	1,6	.40	10,2	3
		.220 - .240	5,6 - 6,1	**4716**	SSRPT-220	.26	6,6					
		.320 - .340	8,1 - 8,6	**4717**	SSRPT-340	.35	8,9					
		.320 - .600	8,1 - 15,2	**4718**	SSRPT-600	.63	16,0	.06	1,6			
		ADJUSTABLE		**4714**	SSRPT-ADJ	1.50	38,1	.06	1,6	.50	12,7	4
FEMALE CAP for the above parts				**4719**	SSRCT	n/a		.06	1,6	.63	15,9	5

Standard color natural.

HEYClip™ Ratchet Rivets

WILL FIT THESE PANELS						PART NO.	DESCRIPTION	PART DIMENSIONS					
MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS						A Length		B Head Height		C Head Diameter	
		Min.		Max.									
						Natural							
in.	mm.	in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.
RR Series													
.281	7,1	.235	6,0	.297	7,5	**12480**	RR 0297-41	.23	5,7	.06	1,6	.41	10,3
		.345	8,8	.500	12,7	**12481**	RR 0500-41	.34	8,7				
		.500	12,7	.813	20,7	**12482**	RR 0813-41	.49	12,4				
		.780	19,8	1.375	34,9	**12483**	RR 1375-41	.77	19,5				
		.235	6,0	.298	7,6	**12484**	RR 0298-75	.23	5,7	.09	2,4	.75	19,1
		.345	8,8	.500	12,7	**12485**	RR 0500-75	.34	8,7				
		.500	12,7	.812	20,6	**12486**	RR 0812-75	.49	12,4				
		.780	19,8	1.375	34,9	**12487**	RR 1375-75	.77	19,5				

Standard color natural.

	PRP	Shorty Snap & Ratchet Rivet
Material	Polysulfone (PSU)	Nylon 6/6
Flammability Rating	94-HB	94 V-2
Temperature Range	32°F (0°C) to 302°F (150°C)	32°F (0°C) to 185°F (85°C)

ALL NEW PRODUCTS!

HEYClip™ Unscrewing Snap Rivets

- Phillips head screw driver required for removal.

WILL FIT THESE PANELS						PART NO.	DESCRIPTION	PART DIMENSIONS						STYLE
MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS						A Length		B Head Height		C Head Diameter		
		Min.		Max.										
in.	mm.	in.	mm.	in.	mm.	Black		in.	mm.	in.	mm.	in.	mm.	
HUSR Series														
.197	5,0	.059	1,5	.236	6,0	**4330**	HUSR 197-158	.43	11,0	.15	3,9	.47	12,0	1
.236	6,0					**4331**	HUSR 236-059	.43	11,0	.15	3,9	.63	16,0	
.315	8,0	.118	3,0	.394	10,0	**4332**	HUSR 315-118	.55	14,0	.16	4,0	.79	20,0	2
		.276	7,0	.315	8,0	**4333**	HUSR 315-276	.80	20,3	.14	3,6	.79	20,0	3

Standard color black.



Style 1



Style 2



Style 3

HEYClip™ Mini Tough Rivets

WILL FIT THESE PANELS						PART NO.	DESCRIPTION	PART DIMENSIONS					
MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS						A Length		B Head Height		C Head Diameter	
		Min.		Max.									
in.	mm.	in.	mm.	in.	mm.	Black		in.	mm.	in.	mm.	in.	mm.
MTR Series													
.125	3,2	.155	3,9	.180	4,6	**12475**	MTR 180-125	.37	9,4	.05	1,3	.22	5,5
.150	3,8	.265	6,7	.290	7,4	**12477**	MTR 290-150	.47	11,9	.05	1,3	.30	7,6

Standard color black.



MTR Series

HEYClip™ Mounting Buttons

WILL FIT THESE PANELS						PART NO.	DESCRIPTION	PART DIMENSIONS					
MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS						A Length		B Head Height		C Head Diameter	
		Min.		Max.									
in.	mm.	in.	mm.	in.	mm.	Natural		in.	mm.	in.	mm.	in.	mm.
HMP Series													
		.031	0,8	.100	2,4	**4251**	HMP 156-031	.24	6.1				
		.094	2,4	.157	4,0	**4252**	HMP 156-094	.30	7.7				
		.189	4,8	.220	5,6	**4253**	HMP 156-189	.40	10.1				
		.220	5,6	.312	7,1	**4254**	HMP 156-220	.43	10.9				
.156	4,0	.312	7,9	.375	9,5	**4255**	HMP 156-312	.52	13.2	.19	4,8	.38	9,5
		.375	9,5	.437	11,1	**4256**	HMP 156-375	.58	14.8				
		.437	11,1	.500	12,7	**4257**	HMP 156-437	.65	16.4				
		.500	12,7	.563	14,3	**4258**	HMP 156-500	.71	18.0				
		.563	14,3	.625	15,9	**4259**	HMP 156-563	.77	19.6				

Standard color natural.



HMP Series

	HUSR & HMP	MTR
Material	Nylon 6/6	Heat stablized Nylon 6
Flammability Rating	94V-2	94 V-2
Temperature Range	32°F (0°C) to 185°F (85°C)	32°F (0°C) to 230°F (110°C)

HEYClip™ Nylon Arrow Clips

Maximum Assembled Panel Sequence

- **Hollow body design** allows the clip to compress through the mounting hole, then expand back to original shape to lock assembled components securely (PN 0306 does not have a hollow body).
- May be disassembled and reused.
- Offer a low cost way to assemble metal, plastic, composite, wood, and other thin gauge materials.
- Snap into mounting holes with fingertip pressure–no tools required.
- Vibration, abrasion, and corrosion resistant.

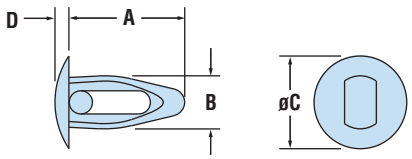

AC/ACT Series

ASSEMBLED PANEL THICKNESS RANGE				MOUNTING HOLE DIAMETER RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS							
Maximum		Minimum		Maximum		Minimum					A Length		B Clip Dia.		C Head Dia.		D Head Height	
in.	mm.	in.	mm.	in.	mm.	in.	mm.	Natural	Black		in.	mm.	in.	mm.	in.	mm.	in.	mm.
AC Series For combined Panel Thickness ≤ .250" (6,4 mm)																		
.10	2,5	.04	1,0	.190	4,8	.180	4,6	**0325**	**0325B**	AC 1996	.45	11,4	.22	5,5	.36	9,1		
				.122	3,1	.118	3,0	**0315**	**0315B**	AC 15	.39	9,9	.15	3,8			.06	1,5
				.135	3,4	.130	3,3	**0302**	**0302B**	AC 2	.38	9,7	.16	4,1	.28	7,1		
.13	3,2	.06	1,6	.165	4,2	.160	4,1	**0318**	**0318B**	AC 18 *	.40	10,2	.19	4,7	.28	7,1	.08	2,0
				.192	4,9	.182	4,6	**0301**	**0301B**	AC 1	.42	10,5	.23	5,7	.36	9,1		
				.212	5,4	.192	4,9	**0328**	**0328B**	AC 28	.45	11,4	.24	6,0	.38	9,5		
				.223	5,7	.213	5,4	**0307**	**0307B**	AC 7	.45	11,4	.22	5,6	.37	9,4		
.14	3,6	.13	3,2	.132	3,4	.130	3,3	**0313**	**0313B**	AC 13	.32	8,1	.16	4,1	.28	7,1	.06	1,5
.15	3,7	.06	1,6	.161	4,1	.151	3,8	**0304**	**0304B**	AC 4	.40	10,2	.18	4,6				
.16	4,1	.06	1,6	.223	5,7	.213	5,4	**0305**	**0305B**	AC 5	.52	13,2	.25	6,3	.37	9,4		
		.17	4,2	.192	4,9	.182	4,6	**0311**	**0311B**	AC 11	.52	13,2	.21	5,2				
.19	4,7	.06	1,6	.223	5,7	.213	5,4	**0326**	**0326B**	AC 1668	.49	12,5	.25	6,3	.63	15,9	.10	2,5
		.13	3,2	.260	6,6	.250	6,4	**0309**	**0309B**	AC 9	.58	14,6	.29	7,4	.48	12,3	.07	1,8
.25	6,4	.13	3,2	.260	6,6	.250	6,4	**0321**	**0321B**	AC 21**	.63	16,0	.28	7,1	.50	12,7	.09	2,2
ACT Series For combined Panel Thickness > .250" (6,4 mm)																		
.30	7,6	.29	7,4	.150	3,8	.145	3,7	**0314**	**0314B**	AC 14	.53	13,5	.20	5,0	.27	6,9	.07	1,7
.33	8,4	.31	7,9	.192	4,9	.182	4,6	**0306**	**0306B**	AC 6 **	.55	14,0	.23	5,7	.38	9,7	.06	1,5
.34	8,6	.06	1,6	.335	8,5	.320	8,1	**0317**	**0317B**	AC 17	.90	22,9	.38	9,5	.68	17,3		
.38	9,7	.36	9,1	.260	6,6	.250	6,4	**0316**	**0316B**	AC 16	.81	20,6	.28	7,0	.61	15,5	.07	1,7
.75	19,1	.50	12,7	.260	6,6	.250	6,4	**0324**	**0324B**	AC 24**	1.14	28,8	.29	7,3				

Standard color natural. Consult Heyco for black and other colors.
*AC 18 minimum panel thickness is .03˝ (0,8 mm), head height is .08˝ (2,0 mm)
**Webbed, not hollow body.



HMB Series

ALL NEW PRODUCTS!

HEYClip™ Shorty Mounting Buttons

ASSEMBLED PANEL THICKNESS RANGE				MOUNTING HOLE DIAMETER RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS							
Maximum		Minimum		Maximum		Minimum					A Length		B Clip Dia.		C Head Dia.		D Head Height	
in.	mm.	in.	mm.	in.	mm.	in.	mm.	Natural	Black		in.	mm.	in.	mm.	in.	mm.	in.	mm.
HMB Series																		
.10	2,5	.08	2,0	.127	3,2	.122	3,1	**4199**	**4199B**	HMB 125-06	.33	8,4	.09	2,2	.28	7,1	.05	1,2
.16	4,0	.11	2,9	.141	3,6	.131	3,3	**4200**	**4200B**	HMB 136-06	.44	11,1	.13	3,2	.41	10,3	.07	1,7
.16	4,0	.10	2,5	.192	4,9	.181	4,6	**4201**	**4201B**	HMB 187-06	.43	10,9	.16	4,0	.50	12,7	.09	2,2

Standard color natural and black.

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

ALL NEW PRODUCTS!

HEYClip™ Nylon Kayak Clips

Maximum Assembled Panel Sequence

ASSEMBLED PANEL THICKNESS RANGE Maximum in.	mm.	Minimum in.	mm.	MOUNTING HOLE DIAMETER RANGE Maximum in.	mm.	Minimum in.	mm.	PART NO. Natural	DESCRIPTION	PART DIMENSIONS A Length in.	mm.	B Clip Dia. in.	mm.	C Head Dia. in.	mm.	D Head Height in.	mm.	Head Type	Style
KC Series																			
.09	2,3	.06	1,5	.140	3,6	.135	3,4	**4272**	KC 09-14	.33	8,4	.16	4,1	.30	7,6	.06	1,5	TRUSS	
.09	2,3	.06	1,5	.141	3,6	.131	3,3	**4273**	KC 09-14-1	.27	6,9	.16	4,1	.40	10,2	.15	3,8	ROUND	2
.10	2,5	.08	2,0	.127	3,2	.123	3,1	**4274**	KC 10-13	.33	8,4	.13	3,3	.27	6,9	.04	1,0	TRUSS	
.13	3,3	.08	2,0	.141	3,6	.131	3,3	**4275**	KC 13-14	.37	9,4	.17	4,3	.41	10,4	.10	2,5	PAN	1
				.205	5,2	.175	4,4	**4276**	KC 13-21	.43	10,9	.21	5,3	.50	12,7	.25	6,4	ROUND	2
		.09	2,3	.200	5,1	.185	4,8	**4277**	KC 13-20	.44	11,2	.21	5,3	.37	9,4	.05	1,3	BINDING	
.14	3,6	.07	1,8	.150	3,8	.125	3,2	**4278**	KC 14-15	.43	10,9	.16	4,1	.30	7,6	.10	2,5	ROUND	1
.16	4,1	.10	2,5	.192	4,9	.182	4,6	**4279**	KC 16-19	.43	10,9	.21	5,3	.37	9,4	.06	1,5	TRUSS	
		.09	2,3	.200	5,1	.185	4,7	**4282**	KC 16-20	.44	11,2	.21	5,3	.38	9,7	.06	1,5	BINDING	2
.21	5,3	.09	2,3	.220	5,6	.200	5,1	**4283**	KC 21-22	.50	12,7	.24	6,1	.52	13,2	.07	1,8	PAN	
		.08	2,0	.275	7,0	.240	6,1	**4284**	KC 21-28	.63	16,0	.29	7,4	.50	12,7	.05	1,3	BINDING	
.22	5,6	.10	2,5	.280	7,1	.245	6,2	**4285**	KC 22-28	.63	16,0	.29	7,4	.86	21,8	.09	2,3	TRUSS	1
				.260	6,6	.240	6,1	**4286**	KC 22-26	.46	11,7	.29	7,4	.45	11,4	.06	1,5	PAN	

Standard color natural. Consult Heyco for black and other colors.

- A low cost **replacement for screws and rivets**.
- Snap into round mounting holes.
- Fasten securely into a variety of materials.
- Ideal for assembling lightweight panels and components.

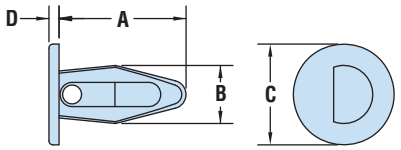

Style 1

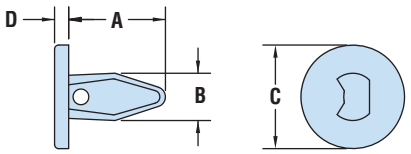

Style 2

HEYClip™ Nylon Holster Clips

Mounting Hole Diameter/Assembled Panel Thickness Sequence

MOUNTING HOLE DIA. in.	mm.	ASSEMBLED PANEL THICKNESS in.	mm.	PART NO. Natural	DESCRIPTION	HEAD DIAMETER in.	mm.
HHC Series							
.219	5,6	.093	2,3	**4287**	HHC 09-22	.34	8,6
		.125	3,3	**4289**	HHC 13-22		
		.156	4,1	**4292**	HHC 16-22		
		.187	4,8	**4294**	HHC 19-22		
		.219	5,5	**4295**	HHC 22-22		
		.250	6,4	**4296**	HHC 25-22		
		.281	7,1	**4297**	HHC 28-22		
		.312	7,9	**4298**	HHC 31-22		
		.343	8,6	**4299**	HHC 34-22		
		.375	9,7	**4322**	HHC 38-22		
.250	6,4	.093	2,3	**4288**	HHC 09-25	.50	12,7
		.156	4,1	**4293**	HHC 16-25	.31	7,9

Standard color natural. Consult Heyco for black and other colors.

- Holster shaped interior allows the part to collapse more completely, for assembly with just **fingertip pressure**.
- Tapered, bullet-style point **slides easily** into any mounting hole.
- Angled panel locking section **takes up slack** to provide for a tight assembly.
- The design allows for a relatively large clip-diameter-to-hole-size ratio, resulting in **higher retention force**.
- Consult Heyco for other mounting hole and panel thickness **variations**.



Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C)

HEYClip™ Nylon Push-In and Thick Panel Push-In Fasteners

ALL NEW PRODUCTS!

Assembled Panel Thickness Sequence

- **Slotted leg design** allows for both compression through the mounting hole and then expansion back to original shape–to lock assembled components securely.
- May be disassembled and reused.
- Offer a low cost way to assemble metal, plastic, composite, wood, and other thin gauge materials.
- Snap into mounting holes with fingertip pressure–no tools required.
- Vibration, abrasion, and corrosion resistant.



ASSEMBLED PANEL THICKNESS		MOUNTING HOLE DIA.		PART NO.		DESCRIPTION	PART DIMENSIONS							
				Natural	Black (NEW!)		A Length		B Clip Dia.		C Head Dia.		D Head Height	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	in.	mm.
PF Series For combined Panel Thickness ≧ .250" (6,4 mm)														
.07	1,7	.165	4,2	**0351**	**0351B**	PF 065-165	.20	5,1	.20	5,1	.34	8,7	.12	3,1
.09	2,4	.093	2,4	**0340**	**0340B**	PF 093-093*	.17	4,3	.11	2,7	.28	7,1	.03	0,7
.10	2,5	.245	6,2	**0384**	**0384B**	PF 098-245	.27	6,8	.28	7,1	.50	12,7	.06	1,4
.12	2,9	.125	3,2	**0339**	**0339B**	PF 115-125	.20	5,1	.15	3,7	.25	6,4	.04	1,0
.12	3,1	.089	2,3	**0341**	**0341B**	PF 121-089*	.21	5,3	.15	3,7	.31	7,9	.04	1,0
		.115	2,9	**0347**	**0347B**	PF 121-115	.25	6,2	.14	3,6	.20	5,2		
		.200	5,1	**0358**	**0358B**	PF 121-200	.27	6,9	.24	6,1	.47	11,9	.05	1,3
.13	3,4	.175	4,4	**0350**	**0350B**	PF 133-175	.27	6,9	.20	5,1	.34	8,7	.04	1,0
.16	4,0	.115	2,9	**0343**	**0343B**	PF 156-115	.29	7,4	.14	3,6	.20	5,2	.04	1,0
		.210	5,3	**0360**	**0360B**	PF 156-210	.31	7,8	.23	5,8	.47	11,9	.05	1,3
.17	4,3	.260	6,6	**0370**	**0370B**	PF 171-260	.36	9,1	.30	7,5	.59	15,1	.06	1,5
.19	4,8	.155	3,9	**0342**	**0342B**	PF 190-155	.28	7,1	.18	4,6	.20	5,2	.04	1,0
.24	6,0	.200	5,1	**0352**	**0352B**	PF 237-200	.39	9,8	.24	6,0	.47	11,9	.05	1,3
.25	6,4	.200	5,1	**0353**	**0353B**	PF 250-200	.42	10,8	.22	5,7	.34	8,7	.06	1,5
		.218	5,5	**0362**	**0362B**	PF 250-218	.36	9,1	.28	7,2	.41	10,3	.05	1,1
		.240	6,1	**0371**	**0371B**	PF 250-240	.43	10,9	.30	7,5	.59	15,1	.06	1,5
PFT Series For combined Panel Thickness > .250" (6,4 mm)														
.27	6,9	.155	4,0	**0303**	-	PFT 27-16	.40	10,0	.21	5,3	.38	9,5	.07	1,7
.27	6,9	.240	6,1	**0308**	-	PFT 27-24	.46	11,7	.30	7,6	.45	11,4	.06	1,5
.28	7,0	.240	6,1	**0310**	-	PFT 28-24	.46	11,7	.30	7,6	.45	11,4	.04	1,0
.32	8,1	.157	4,0	**0312**	-	PFT 32-16	.43	10,9	.21	5,3	.39	9,9	.05	1,3
.32	8,1	.118	3,0	**0319**	-	PFT 32-12	.40	10,2	.15	3,7	.23	5,9	.03	0,8
.34	8,6	.174	4,4	**0322**	-	PFT 34-17	.51	13,0	.25	6,4	.33	8,4	.07	1,8
.37	9,4	.245	6,2	**0323**	-	PFT 37-25	.55	14,0	.30	7,6	.59	15,0	.13	3,3
.38	9,7	.200	5,1	**0361**	-	PFT 38-20	.51	13,0	.24	6,0	.34	8,7	.04	1,0
		.240	6,1	**0327**	-	PFT 38-24	.56	14,2	.30	7,6	.59	15,0	.06	1,5
.40	10,2	.135	3,4	**0329**	-	PFT 40-14	.54	13,7	.16	4,1	.28	7,1	.08	2,0
.41	10,3	.275	7,0	**0330**	-	PFT 41-28	.57	14,5	.32	8,1	.59	15,0	.06	1,5
.43	10,8	.135	3,4	**0331**	-	PFT 43-14	.64	16,3	.16	4,1	.42	10,7	.09	2,3
.48	12,2	.240	6,1	**0332**	-	PFT 48-24	.67	17,0	.30	7,6	.59	15,0	.06	1,5
.55	14,0	.180	4,6	**0333**	-	PFT 55-18	.71	18,0	.23	5,8	.35	8,9	.07	1,8
.70	17,8	.245	6,2	**0334**	-	PFT 70-25	.90	22,9	.34	8,6	.50	12,7	.08	2,0
.88	22,4	.246	6,3	**0335**	-	PFT 88-24	1.12	28,5	.28	7,1	.38	9,7	.06	1,5
		.250	6,4	**0336**	-	PFT 88-25	1.13	28,7	.31	7,9				
.89	22,6	.260	6,6	**0337**	-	PFT 89-26	.95	24,1	.34	8,6	.41	10,4	.07	1,8
1.00	25,4	.345	8,9	**0338**	-	PFT 100-35	1.38	35,1	.45	11,4	.50	12,7	.07	1,8
1.02	25,9	.350	8,9	**0344**	-	PFT 102-35	1.40	35,6	.48	12,2	.50	12,7	.06	1,5

Standard color natural. Consult Heyco for black and other colors.

*No slot.

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

ALL NEW PRODUCTS!

HEYClip™ Nylon Snap Lock Pins

Assembled Panel Thickness Sequence

MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS		PART NO. Natural	DESCRIPTION	PART DIMENSIONS A Length		B Clip Dia.		C Head Dia.		D Head Height	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.
SLP1 Series													
		.177	4,5	**12040**	SLP1-177	.26	6,6						
		.221	5,6	**12041**	SLP1-221	.30	7,6						
		.236	6,0	**12042**	SLP1-236	.31	7,9						
		.245	6,2	**12043**	SLP1-245	.32	8,1						
		.307	7,8	**12044**	SLP1-307	.39	9,9						
.098	2,5	.316	8,0	**12045**	SLP1-316	.40	10,0	.09	2,4	.20	5,1	.05	1,3
		.330	8,4	**12046**	SLP1-330	.41	10,4						
		.413	10,5	**12047**	SLP1-413	.49	12,4						
		.638	16,2	**12048**	SLP1-638	.72	18,3						
		.660	16,8	**12049**	SLP1-660	.74	18,8						
		.701	17,8	**12050**	SLP1-701	.78	19,8						

Standard color natural. Consult Heyco for black and other colors.

- Used to fix connectors to the printed circuit board prior to wave soldering.

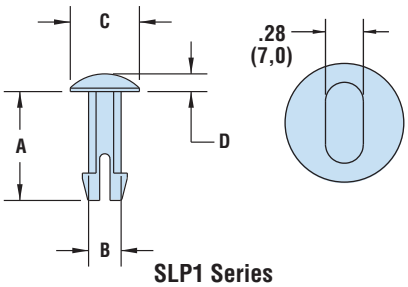

SLP1 Series

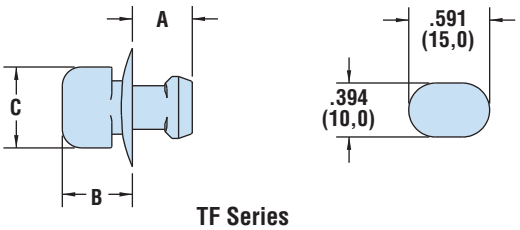

TF Series

HEYClip™ Turn Fastener

WILL FIT THESE PANELS MOUNTING SLOT DIA.		ASSEMBLED PANEL THICKNESS Min.			Max.	PART NO. Black	DESCRIPTION	PART DIMENSIONS A Length		B Head Height		C Head Length	
in.	mm.	in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.
TF Series													
.394	10,0	.24	6,0	.28	7,0	**9087**	TF 394-236	.44	11,1	.51	13,0	.59	15,0

Standard color black.

- For use with combined panel thicknesses between .24" (6,0 mm) and .28" (7,0 mm).
- Part Description Key:
  TF X-YYY where XXX = Mounting Hole Diameter (inches) and YYY = minimum Panel Thickness (inches)

HEYClip™ Nylon Pawl Lock

MOUNTING HOLE DIA.		PART NO. Natural	DESCRIPTION	PART DIMENSIONS A Length		B Head Height		C Head Diameter	
in.	mm.			in.	mm.	in.	mm.	in.	mm.
.250	6,4	**10676**	HPL - 1	.63	15,9	.08	2,0	.50	12,7



HPL-1 Series

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	-.4°F (-18°C) to 185°F (85°C)

HEYCO

Heyco® Rubber Push-In Bumpers

- **Rubber bumpers are designed for through hole installation.**
- Designed to fit snugly into your opening and not let air, water, etc. pass through.
- Can also be used as feet.
- For Heyco Adhesive-Backed Bumpers see page 75.
- Part Description Key: RGB X-Y-Z where X = Mounting Hole Diameter (inches), Y = Base Diameter (inches), and Z/32 = Base Height (inches).

PANEL DIMENSIONS				PART NO.	DESCRIPTION	MATERIAL	PART DIMENSIONS							
Mounting Hole Dia.		Maximum Thickness		Black			A Base Diameter		B Base Height		C Insert Diameter		D Insert Height	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	in.	mm.
Type H														
.203	5,2	.078	2,0	**G3116**	RGB 203-812-6	Santoprene	.81	20,6	.19	4,7	.22	5,6	.20	5,1
				G3117	RGB 203-812-8	Santoprene	.81	20,6	.25	6,4				
				G3118	RGB 203-812-12	Santoprene	.81	20,6	.38	9,5				
Type D														
.218	5,5	.093	2,4	**G2016**	RGB 218-406-6	SBR	.41	10,4	.19	4,8	.28	7,1	.09	2,3
.250	6,4	.047	1,2	**G2020**	RGB 250-500-6	SBR	.50	12,7	.17	4,3	.31	7,9	.19	4,8
.312	7,9	.062	1,6	**G2035**	RGB 312-375-5	SBR	.38	9,7	.16	4,1	.38	9,7	.16	4,1
.328	8,3	.094	2,4	**G2039**	RGB 328-846-6	SBR	.85	21,5	.19	4,8	.42	10,7	.27	6,9
.500	12,7	.125	3,2	**G2043**	RGB 500-1000-6	SBR	1.00	25,4	.19	4,8	.63	16,0	.13	3,3
Type T1														
.118	3,0	.098	2,5	**G2000**	RGB 118-236-4	EPDM	.24	6,1	.12	3,0	.20	5,1	.47	11,9
.177	4,5	.059	1,5	**G2006**	RGB 177-334-9	SBR	.33	8,4	.30	7,6	.24	6,1	.73	18,5
.218	5,5	.125	3,2	**G2017**	RGB 218-875-6	SBR	.88	22,4	.17	4,3	.34	8,7	.48	12,2
Type T2*														
.187	4,7	.047	1,2	**G2009**	RGB 187-250-6	SBR	.25	6,4	.19	4,7	.23	5,8	.34	8,6

Standard color black.

*Designed for pull through applications.



Type H







Type D





Type T1





Type T2

Quick Specs

Material	TPE, SBR, or EPDM
Temperature Range	-40°F (-40°C) to 221oF (105°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

Heyco® Rubber Push-In Bumpers

- **Rubber bumpers are designed for through hole installation.**
- Designed to fit snugly into your opening and not let air, water, etc. pass through.
- Can also be used as feet.
- For Heyco Adhesive-Backed Bumpers see page 75.
- Part Description Key: RGB X-Y-Z where X = Mounting Hole Diameter (inches), Y = Base Diameter (inches), and Z/32 = Base Height (inches).

PANEL DIMENSIONS				PART NO.	DESCRIPTION	MATERIAL	PART DIMENSIONS							
Mounting Hole Dia.		Maximum Thickness		Black			A Base Diameter		B Base Height		C Insert Diameter		D Insert Height	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	in.	mm.
Type F1														
.156	4,0	.031	0,8	**G2004**	RGB 156-375-3	SBR	.38	9,7	.09	2,3	.22	5,6	.11	2,8
.250	6,4	.062	1,6	**G2024**	RGB 250-500-5	SBR	.50	12,7	.16	4,1	.31	7,9	.13	3,3
			1,6	**G2025**	RGB 250-500-8	SBR	.50	12,7	.25	6,4				
		.125	3,2	**G2027**	RGB 250-562-4	SBR	.56	14,2	.13	3,3	.34	8,6		
.281	7,1	.078	2,0	**G2031**	RGB 281-562-4	SBR	.56	14,2	.13	3,3	.38	9,7	.16	4,1
		.125	3,2	**G2032**	RGB 281-625-11	SBR	.63	16,0	.34	8,6	.44	11,2	.17	4,3
.500	12,7	.188	4,8	**G2044**	RGB 500-1000-10	SBR	1.00	25,4	.31	7,9	.69	17,5	.19	4,8
Type F2														
.187	4,7	.062	1,6	**G2012**	RGB 187-375-4	SBR	.38	9,7	.13	3,3	.25	6,4	.13	3,3
.188	4,8	.062	1,6	**G2013**	RGB 188-500-3	Nitrile	.50	12,7	.09	2,3	.25	6,4	.19	4,8
.250	6,4	.050	1,3	**G2021**	RGB 250-562-12	SBR	.56	14,2	.38	9,7	.34	8,6	.27	6,9
		.062	1,6	**G2022**	RGB 250-375-4	SBR	.38	9,7	.13	3,3	.31	7,9	.06	1,5
				G2023	RGB 250-375-4R*									
		.125	3,2	**G2026**	RGB 250-406-7	Nitrile	.41	10,4	.22	5,6	.34	8,6		
.281	7,1	.047	1,2	**G2029**	RGB 281-500-2	Nitrile	.50	12,7	.06	1,5	.38	9,7	.16	4,1
				G2030	RGB 281-500-4	SBR	.50	12,7	.13	3,3				
.312	7,9	.047	1,2	**G2034**	RGB 312-1250-3	SBR	1.25	31,8	.09	2,3	.44	11,2	.08	2,0
		.078	2,0	**G2036**	RGB 312-875-4	SBR	.88	22,4	.13	3,3	.50	12,7	.06	1,5
Type F3														
.156	4,0	.109	2,8	**G2007**	RGB 156-500-2	SBR	.50	12,7	.06	1,5	.25	6,4	.08	2,0
.188	4,8	.047	1,2	**G2010**	RGB 188-312-4	SBR	.31	7,9	.13	3,3	.25	6,4	.09	2,3
.187	4,7	.050	1,3	**G2011**	RGB 187-375-8	SBR	.38	9,7	.25	6,4				
.188	4,8	.078	2,0	**G2014**	RGB 188-338-6**	SBR	.34	8,6	.17	4,3	.25	6,4	.30	7,6
.250	6,4	.047	1,2	**G2019**	RGB 250-437-6	SBR	.44	11,2	.19	4,8	.31	7,9	.13	3,3
.312	7,9	.094	2,4	**G2037**	RGB 312-625-8	SBR	.63	16,0	.25	6,4	.38	9,7		
Special Bumpers NEW!														
.148	3,8	.125	3,3	**G2003**	RGB 148-310-1	TPE	.31	7,9	.06	1,5	.17	4,3	.14	3,6
.180	4,6	.062	1,6	**G2005**	RGB 180-310-3	TPE	.31	7,9	.09	2,3	.24	6,1	.12	3,0
.238	6,0	.075	1,9	**G2015**	RGB 238-620-6**	TPE	.53	13,4	.18	4,6	.29	7,4	.34	8,6
.281	7,1	.051	1,3	**G2028**	RGB 281-620-6**	TPE	.62	15,7	.20	5,1	.34	8,6	.16	4,1
.378	9,6	.063	1,6	**G2038**	RGB 378-500-15**	TPE	.50	12,7	.48	12,2	.50	12,7	.14	3,6

Standard color black. *Part number G2023 has a round insertion head. **Part has a hollow core.



Type F1



Type F2



Type F3



G2003 & G2005

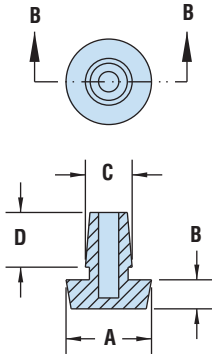

G2015 & G2028

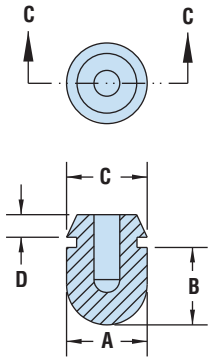

G2038

Material	SBR or Nitrile
Temperature Range	-40°F (-40°C) to 221°F (105°C)

Quick Specs

Heyco® Screw-In Rubber Pocket Bumpers

- **Bumpers can be used as mounting feet** to prevent equipment from sliding or moving.
- Designed for through hole installation.
- 60-70 Durometer Range.
- 29 sizes available that will accommodate various mounting holes and panel thicknesses.
- Provide vibration dampening.

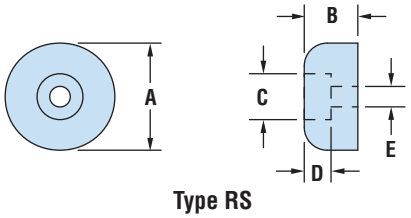

Type RS

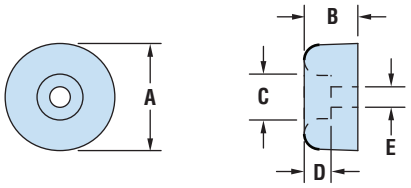

Type RR

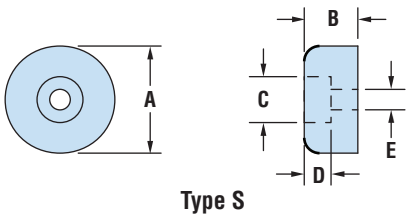

Type S

PART DIMENSIONS								BLACK PART NO.			
A Outside Diameter		B Overall Height		C Recess Diameter		D Recess Depth		No Washer	With Steel Washer	E Fastner Hole Dia.*	
in.	mm.	in.	mm.	in.	mm.	in.	mm.			in.	mm.
Type RS											
.50	12,7	.25	6,4	.25	6,4	.16	4,0	-	**G2201**	.13	3,2
.63	15,9	.38	9,5	.25	6,4	.19	4,7	-	**G2205**		
.75	19,1	.38	9,5	.32	7,9	.19	4,7	-	**G2209**	.16	4,0
.81	20,6	.72	18,3	.38	9,5	.28	7,1	-	**G2213**	.22	5,5
1.00	25,4	.81 1.00	20,6 25,4	.25 .31	6,4 7,9	.44 .63	11,1 15,9	- **G2220**	**G2217** **G2221**	.13 .16	3,2 4,0
1.09	27,7	.63	15,9	.44	11,1	.41	10,3	-	**G2225**	.19	4,7
Type RR											
.50	12,7	.25	6,4	.25	6,4	.16	4,0	-	**G2229**	.09	2,4
.75	19,1	.56 .75	14,3 19,1	.38 .31	9,5 7,9	.25 .25	6,4 6,4	- -	**G2233** **G2237**	.19 .13	4,7 3,2
.81	20,6	.81	20,6	.47	11,9	.44	11,1	-	**G2241**	.25	6,4
.94	23,8	.35	8,9	.38	9,5	.18	4,6	-	**G2245**	.19	4,7
		.38	9,5	.38	9,5	.22	5,5	**G2244**	-		
.97	24,6	.34	8,7	.38	9,5	.19	4,7	-	**G2249**		
1.00	25,4	.44	11,1	.38	9,5	.19	4,7	-	**G2253**		
		.50 .56	12,7 14,3	.50 .53	12,7 13,5	.25 .31	6,4 7,9	- -	**G2257** **G2261**	.22 .28	5,5 7,1
1.25	31,8	1.25 1.88	31,8 47,6	.38 .38	9,5 9,5	.75 .75	19,1 19,1	- -	**G2267** **G2271**	.25	6,4
1.50	38,1	.63	15,9	.50 .75	12,7 19,1	.34 .34	8,7 8,7	- **G2278**	**G2275** **G2279**	.19 .31	4,7 7,9
		.75	19,1	.47	11,9	.50	12,7	-	**G2283**	.25	6,4
1.70	43,2	1.12	28,4	.60	15,2	.72	18,3	**G2286**	-	.38	9,6
1.71	44,5	1.66	44,5	.62	15,9	.50	12,7	**G2290**			
2.50	63,5	1.00	25,4	1.13	28,6	.50	12,7	**G2294** **G2296**† **G2298**†			
		2.00	50,8	1.13	28,6	1.25	28,6	**G2302**			
Type S											
1.00	25,4	.50	12,7	.36 / .43	9,0 / 10,9	.20 / .16	5,0 / 4,1	-	**G2307**	.19	4,7
1.50	38,1	.75	19,1	.75	19,1	.38	9,5	-	**G2311**	.25	6,4

Standard color black. Standard material SBR (Styrene Butadiene Rubber), 60-70 durometer.
***Fastener not included.**
†**Part Nos. G2296** and **G2298** are made from **White** SBR, 60-70 durometer.

Quick Specs

Material	SBR
Temperature Range	-40°F (-40°C) to 221°F (105°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

HEYCO

Heyco® Polyurethane Adhesive-Back Bumpers

PART DIMENSIONS A Diameter in.	A Diameter mm.	B Height in.	B Height mm.	PART NO. Clear	PART NO. Black	DESCRIPTION	Pieces per Pad
HSA Series Hemi							
.25	6,4	.06	1,6	**N040**	**N140**	HBA 250-06	578
.31	7,9	.09	2,3	**N027**	**N127**	HBA 312-09	450
.34	8,6	.09	2,3	**N007**	**N107**	HBA 335-09	
.38	9,7	.15	3,8	**N012**	**N112**	HBA 375-15	200
.44	11,2	.20	5,1	**N002**	**N102**	HBA 440-20	242
.62	15,7	.31	7,9	**N015**	**N115**	HBA 620-31	128
.70	17,8	.38	9,7	**N008**	**N108**	HBA 700-38	98
CBA Series Cylinder							
.38	9,7	.19	4,8	**N035**	**N135**	CBA 370-19	200
.50	12,7	.06	1,5	**N005**	**N105**	CBA 500-06	200
		.14	3,6	**N001**	**N101**	CBA 500-14	
		.25	6,4	**N006**	**N106**	CBA 500-25	
.65	16,5	.40	10,2	**N011**	**N111**	CBA 650-40	128
.78	19,8	.20	5,1	**N041**	**N141**	CBA 780-20	84
.81	20,6	.12	3,0	**N024**	**N124**	CBA 810-12	72
CDBA Series Pocket							
.50	12,7	.14	3,6	**N018**	**N118**	CDBA 500-14	200
.88	22,4	.40	10,2	**N017**	**N117**	CDBA 880-40	72
1.81	46,0	.60	15,2	**N030**	**N130**	CDBA 1810-60	1
TBA Series Square or Tapered							
.50	12,7	.12	3,0	**N009**	**N109**	TBA 5050-12	200
.81	20,6	.30	7,6	**N019**	**N119**	TBA 8181-30	98

Standard colors clear and black. For white, gray or brown consult Heyco.

- Quick and easy installation–simply peel off backing and press into place. With no holes to drill, and no screws or rivets needed, adhesive backed bumpers will save you time and money.
- Bumpers can be attached to a wide variety of surfaces; aluminum, ceramic, formica, glass, painted surfaces, polyethylene, polypropylene, vinyl, and steel.
- Adhesive backed bumpers are nonmarking, nonstaining, skid, and scratch resistant.
- Surface must be clean, dry, and free of grease, oil, and other common solvents to obtain maximum adhesion. Clean surfaces with low strength solvents such as Isopropyl Alcohol or Heptane.
- Bumpers have a rubber-based pressure sensitive adhesive with an end use temperature of 0°F (-18°C) to 180°F (82°C).
- Standard colors clear and black. White, gray and brown available, please consult Heyco.



HSA-Hemi



CBA-Cylinder



CDBA-Pocket



TBA-Square or Tapered

Material		Polyurethane
Certifications	UL	Recognized under the Component Program of Underwriters' Laboratories File E196663
Flammability Rating		HB
Temperature Range		0°F (-18°C) to 180°F (82°C)

Quick Specs

ALL NEW PRODUCTS!

Heyco® Break-Away Bumpers

- Part Description Key: RGBA X-Y-Z where X = Mounting Hole Diameter (inches), Y = Base Diameter (inches). and Z= Durometer.

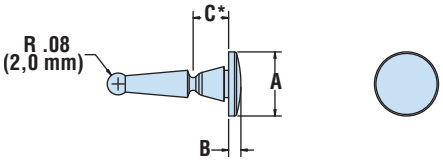

G2312-G2314

PANEL DIMENSIONS				PART NO.	DESC.	MATERIAL	PART DIMENSIONS					
Mounting Hole Dia.		Thickness					A Base Diameter		B Base Height		C Insert Height*	
in.	mm.	in.	mm.	Black			in.	mm.	in.	mm.	in.	mm.
RGBA Series												
.187-.197	4,7-5,0	.02	0,5	**G2312**	RGBA 19-39-50	Silicone Rubber 50	.39	10,0	.08	2,0	.17	4,3
.197-.212	5,0-5,4	.02-.03	0,6-0,8	**G2313**	RGBA 20-47-40	Silicone Rubber 40	.47	12,0	.09	2,3	.26	6,5
				G2314	RGBA 20-47-50	Silicone Rubber 50						

Standard color black. *Approximate: after Lead Stem is broken off.

Heyco® Feets of Strength

Feet with Drive Pin

- Molded of thermoplastic elastomer or polypropylene and elastomer blend for **skid and vibration resistance**.
- Two piece construction comes preassembled.
- To install, simply insert into the mounting hole, then press pin to secure.
- Part Description Key: FSD/FSS XX-YY-ZZ where XX = Overall Height (inches), YY = Mounting Hole Diameter (inches) and ZZ = Maximum Panel Thickness (inches)

PART DIMENSIONS						PANEL DIMENSIONS						PART NO. Black	DESCRIPTION
A Overall Height		B Top Diameter		C Bottom Diameter		Mounting Hole Diameter		Thickness Range Minimum		Thickness Range Maximum			
in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.		
FSD / FSS * Series													
.20	5,0	.98	25,0	.91	23,0	.299	7,6	.03	0,8	.06	1,5	**2543**	FSD 20-30-06
		.79	20,0	.71	18,0	.303	7,7	.03	0,8	.06	1,5	**2537**	FSD 20-32-06
.24	6,0	.83	21,0	.79	20,0	.303	7,7	.20	5,0	.32	8,0	**2544**	FSD 24-31-32
.39	10,0	.79	20,0	.71	18,0	.200	5,0	.04	1,0	.09	2,3	**2536***	FSS 39-20-09
						.310	7,8	.03	0,8	.06	1,5	**2545**	FSD 39-30-06
						.320	8,1	.03	0,8	.06	1,5	**2548**	FSD 39-32-06
.47	12,0	.79	20,0	.71	18,0	.320	8,1	.02	0,5	.05	1,2	**2547**	FSD 47-32-05
.55	14,0	.95	24,0	.79	20,0	.200	5,0	.04	1,0	.09	2,3	**2538 ***	FSS 55-20-09
.59	15,0	.79	20,0	.71	18,0	.320	8,1	.03	0,8	.07	1,8	**2549**	FSD 59-32-07
		1.18	30,0	1.10	28,0	.200	5,0	.02	0,5	.06	1,5	**2539 ***	FSS 59-20-06
.71	18,0	.79	20,0	.71	18,0	.320	8,1	.02	0,5	.05	1,2	**2551**	FSD 71-32-05

Standard color black. * Slotted Screw replaces Drive Pin.

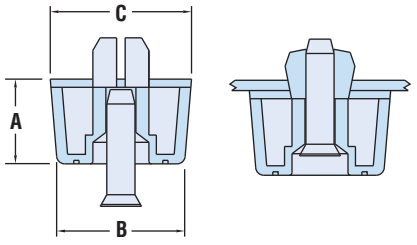

BEFORE INSERTION AFTER INSERTION

FSD

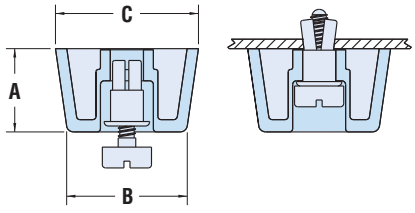

BEFORE INSERTION AFTER INSERTION

FSS

Quick Specs

Material	**RGBA**	Silicone Rubber
Temperature Range		-40°F (-40°C) to 302°F (150°C)
Material	**FSD**	Thermoplastic elastomer or Polypropylene & elastomer

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

Heyco® Feets of Strength

Feet with Push Rivet

PART DIMENSIONS						PANEL DIMENSIONS						PART	DESCRIPTION
A Overall Height		B Top Diameter		C Bottom Diameter		Mounting Hole Diameter		Thickness Range Minimum		Thickness Range Maximum		NO. Black	
in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.		
FSR Series													
.16	4,0	.43	10,8	.39	10,0	.142	3,6	.02	0,5	.05	1,2	**2519**	FSR 16-14-05
								.05	1,2	.08	2,0	**2520**	FSR 16-14-08
								.06	1,5	.10	2,5	**2521**	FSR 16-14-10
								.10	2,5	.14	3,5	**2550**	FSR 16-14-14
.17	4,2	.83	21,0	.79	20,0	.165	4,2	.03	0,8	.07	1,8	**2522**	FSR 17-17-07
								.07	1,8	.11	2,8	**2523**	FSR 17-17-11
								.11	2,9	.15	3,7	**2524**	FSR 17-17-15
								.15	3,8	.19	4,8	**2525**	FSR 17-17-19
.22	5,5	.56	14,2	.53	13,5	.122	3,1	.03	0,8	.07	1,8	**2517**	FSR 22-12-07
								.07	1,8	.11	2,8	**2518**	FSR 22-12-11
.24	6,0	.59	15,0	.55	14,0	.165	4,2	.02	0,6	.04	1,0	**2500**	FSR 24-17-04
								.04	1,0	.08	2,0	**2501**	FSR 24-17-08
								.08	2,0	.12	3,1	**2502**	FSR 24-17-12
						.204	5,2	.03	0,8	.05	1,2	**2506**	FSR 24-21-05
								.05	1,3	.09	2,3	**2507**	FSR 24-21-09
.24	6,0	.83	21,0	.79	20,0	.165	4,2	.03	0,8	.07	1,8	**2526**	FSR 241-17-07
								.08	1,9	.11	2,8	**2527**	FSR 241-17-11
								.11	2,9	.16	4,0	**2528**	FSR 241-17-16
.31	8,0	.83	21,0	.79	20,0	.165	4,2	.01	0,3	.03	0,8	**2575**	FSR 31-17-03
								.03	0,8	.08	2,0	**2529**	FSR 31-17-08
								.08	2,1	.12	3,1	**2530**	FSR 31-17-12
.35	9,0	.59	15,0	.55	14,0	.165	4,2	.04	1,0	.08	2,0	**2532**	FSR 35-17-08
								.08	2,0	.12	3,1	**2533**	FSR 35-17-12

Standard color black.

- **Require only fingertip pressure** for fast, easy installation.
- May be released from inside the panel.
- Multiple sizes range in height from .217˝ (5,5 mm) to .354˝ (9,0 mm).
- Part Description Key: FSR XX-YY-ZZ where XX = Overall Height (inches), YY = Mounting Hole Diameter (inches) and ZZ = Maximum Panel Thickness (inches)

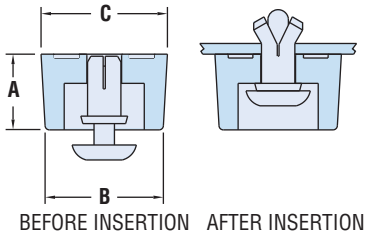

BEFORE INSERTION AFTER INSERTION

FSR

Material	Thermoplastic Rubber (TPR)
Flammability Rating	94-HB
Temperature Range	-30°F (-34°C) to 250°F (121°C)

Quick Specs

Heyco® Feets of Strength

Feet with Snap-In Locking Fingers

- **Snap-in design** eliminates the installation labor needed for a screw or a rivet saving assembly time and equipment.
- Superior mounting approach as the Snap-In Bumper mounts securely into the panel while providing a strong mechanical support to the bumper when used as a mounting foot for electronic enclosures.
- Superior hold versus adhesive backed or screw/rivet bumpers.
- Designed to fit snugly into panel and is dust tight.
- Snap-In Bumpers are skid and scratch resistant and will not mark or stain surfaces.
- Lock firmly into enclosure.
- Quick and easy installation.
- Suitable for metal or plastic panels.
- Bumper constructed of EPDM rubber.
- Part Description Key:
  FSSI XX-YY-ZZ where
  XX = Overall Height (inches),
  YY = Mounting Hole Diameter (inches)
  and ZZ = Maximum Panel Thickness (inches)

- **The low profile snap-in design** requires no screws or adhesives to securely mount into a metal or plastic base.
- The TPE top provides a durable, non-skid surface.
- Snap-In Feet ensure a liquid tight seal and can be used for indoor or outdoor applications.
- Part Description Key:
  LTBP XXX-YYY where
  XXX = Mounting Hole Diameter (inches)
  and YYY = Maximum Panel Thickness (inches)

PART DIMENSIONS				PANEL DIMENSIONS						PART NO.	DESCRIPTION
A Overall Height		B Top Diameter		Mounting Hole Diameter		Thickness Range Minimum		Thickness Range Maximum			
in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	Black	
FSSI Series											
.19	4,7	.812	20,6	.312	7,9	.03	0,8	.06	1,6	**G3016**	FSSI 19-31-06
.25	6,3	.812	20,6	.312	7,9	.03	0,8	.06	1,6	**G3017**	FSSI 25-31-06
.38	9,5	.812	20,6	.312	7,9	.03	0,8	.06	1,6	**G3018**	FSSI 38-31-06

Standard color black.



Snap-In



Low Profile Snap-In

Low Profile Feet with Snap-In Locking Fingers

PART DIMENSIONS				PANEL DIMENSIONS						PART NO.	DESCRIPTION
A Overall Height		B Top Diameter		Mounting Hole Diameter		Thickness Range Minimum		Thickness Range Maximum			
in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	Black	
LTBP Series											
.13	3,2	.55	14,0	.500	12,7	.02	0,5	.06	1,6	**C2008**	LTBP 500-063
						.06	1,6	.25	6,4	**C2058**	LTBP 500-250
		.66	16,8	.625	15,9	.02	0,5	.06	1,6	**C2012**	LTBP 625-063
						.06	1,6	.25	6,4	**C2062**	LTBP 625-250
		.78	19,8	.750	19,1	.02	0,5	.06	1,6	**C2016**	LTBP 750-063
						.06	1,6	.25	6,4	**C2066**	LTBP 750-250
		.90	22,9	.875	22,2	.02	0,5	.06	1,6	**C2020**	LTBP 875-063
						.06	1,6	.25	6,4	**C2070**	LTBP 875-250
		1.05	26,7	1.000	25,4	.02	0,5	.06	1,6	**C2022**	LTBP 1000-063
						.06	1,6	.25	6,4	**C2072**	LTBP 1000-250
		1.16	29,5	1.093	27,8	.02	0,5	.06	1,6	**C2024**	LTBP 1093-063
						.06	1,6	.25	6,4	**C2074**	LTBP 1093-250

Standard color black.

Material	**FSSI Series:** EPDM Rubber insert, Nylon 6/6 body **LTBP Series:** Nylon 6/6 and TPE co-molding
Flammability Rating	HB
Temperature Range	-40°F (-40°C) to 221°F (105°C)
IP Rating	IP 67/68 (LTBP only)

Quick Specs

PCB Supports and LED Spacers LabKit #10

(Part No. 10999)

Use Heyco LabKits!

- Heyco LabKits are perfect for product design departments, experimental labs, and for all prototype work.
- The Heyco PCB Supports and LED Spacers LabKit #10 contains an assortment of our most popular PCB Supports and LED Spacers.
- Heyco also offers LabKits for Solar Power Components, Liquid Tight Cordgrips, Strain Relief Bushings, Hole Plugs, HEYware, and Grommets.
- Parts in LabKits are available in various sizes and colors. Please consult Heyco for further information.

Heyco® HEYware LabKit #5

(Part No. 3399)

PART NUMBER INDEX

Part #	Description	Page
1266	SR 8R-200 BLACK	53
1839	ST-101A BLACK	53
2302	HC 250 GF NYLON BLACK	33
2306	HC 344 BLACK	33
2307	HC 344 WHITE	33
2308	HC 344 GF NYLON BLACK	33
2310	HC 406 BLACK	33
2311	HC 406 WHITE	33
2312	HC 406 GF NYLON BLACK	33
2314	HC 468 BLACK	33
2315	HC 468 WHITE	33
2316	HC 468 GF NYLON BLACK	33
2318	HC 531 BLACK	33
2319	HC 531 WHITE	33
2320	HC 531 GF NYLON BLACK	33
2322	HC 593 BLACK	33
2323	HC 593 WHITE	33
2324	HC 593 GF NYLON BLACK	33
2326	HC 672 BLACK	33
2327	HC 672 WHITE	33
2328	HC 672 GF NYLON BLACK	33
2330	HC 750 BLACK	33
2331	HC 750 WHITE	33
2332	HC 750 GF NYLON BLACK	33
2334	HC 875 BLACK	33
2335	HC 875 WHITE	33
2336	HC 875 GF NYLON BLACK	33
2338	HC 953 BLACK	33
2339	HC 953 WHITE	33
2340	HC 953 GF NYLON BLACK	33
2342	HC 1031 BLACK	33
2343	HC 1031 WHTE	33
2344	HC 1031 GF NYLON BLACK	33
2346	HC 1250 BLACK	33
2347	HC 1250 WHITE	33
2348	HC 1250 GF NYLON BLACK	33
2350	HC 1406 BLACK	33
2351	HC 1406 WHITE	33
2352	HC 1406 GF NYLON BLACK	33
2354	HC 1593 BLACK	33
2355	HC 1593 WHITE	33
2356	HC 1593 GF NYLON BLACK	33
2358	HC 1687 BLACK	33
2359	HC 1687 WHITE	33
2360	HC 1687 GF NYLON BLACK	33
2362	HC 1875 BLACK	33
2363	HC 1875 WHITE	33
2364	HC 1875 GF NYLON BLACK	33
2366	HC 2.125 BLACK	33
2367	HC 2.125 WHITE	33
2368	HC 2.125 GF NYLON BLACK	33
2374	HC 1930 GF NYLON BLACK	33
2377	HC 2.25GF NYLON BLACK	33
2380	HC 2.75 GF NYLON BLACK	33
2383	HC 3.5 GF NYLON BLACK	33
2386	HC 4.0 GF NYLON BLACK	33
2388	LHC 344 BLACK	32
2391	LHC 531 BLACK	32
2393	LHC 672 BLACK	32
2500	FSR 24-17-04 BLACK	77
2501	FSR 24-17-08 BLACK	77
2502	FSR 24-17-12 BLACK	77
2506	FSR 24-21-05 BLACK	77
2507	FSR 24-21-09 BLACK	77
2517	FSR 22-12-07 BLACK	77
2518	FSR 22-12-11 BLACK	77
2519	FSR 16-14-05 BLACK	77
2520	FSR 16-14-08 BLACK	77
2521	FSR 16-14-10 BLACK	77
2522	FSR 17-17-07 BLACK	77
2523	FSR 17-17-11 BLACK	77
2524	FSR 17-17-15 BLACK	77
2525	FSR 17-17-19 BLACK	77
2526	FSR 241-17-07 BLACK	77
2527	FSR 241-17-11 BLACK	77
2528	FSR 241-17-16 BLACK	77
2529	FSR 31-17-08 BLACK	77
2530	FSR 31-17-12 BLACK	77
2532	FSR 35-17-08 BLACK	77
2533	FSR 35-17-12 BLACK	77
2536	FSS 55-20-09 BLACK	76
2537	FSD 20-32-06 BLACK	76
2538	FSS 39-20-09 BLACK	76
2539	FSS 59-20-06 BLACK	76
2543	FSD 20-30-06 BLACK	76
2544	FSD 24-31-32 BLACK	76
2545	FSD 39-30-06 BLACK	76
2547	FSD 47-32-05 BLACK	76
2548	FSD 39-32-06 BLACK	76
2549	FSD 59-32-07 BLACK	76
2550	FSR 16-14-14 BLACK	77
2551	FSD 71-32-05 BLACK	76
2575	FSR 31-17-03 BLACK	77
3300	CH HE-25 NATURAL	52
3301	CH HE-22 NATURAL	52
3302	CCL 1/8 NATURAL	30
3303	CCL 3/16 NATURAL	30
3304	CCL 1/4 NATURAL	30
3305	CCL 5/16 NATURAL	30
3306	CCL 3/8 NATURAL	30
3307	CCL 7/16 NATURAL	30
3308	CCL 1/2 NATURAL	30
3309	CH HA-50-125 GRAY	51
3310	CH LK-49 NATURAL	51
3311	CH LK-90 NATURAL	51
3312	CCL 125-170 NATURAL	30
3313	CCL 187-170 NATURAL	30
3314	CCL 250-170 NATURAL	30
3315	CCL 312-170 NATURAL	30
3316	CCL 375-170 NATURAL	30
3317	CCL 437-170 NATURAL	30
3318	CCL 500-170 NATURAL	30
3319	CH LK-106 NATURAL	51
3320	CH LK-146 NATURAL	51
3321	CH LK-158 NATURAL	51
3322	CCH 1/8 BLACK	30
3323	CCH 3/16 NATURAL	30
3324	CCH 1/4 NATURAL	30
3325	CCH 5/16 NATURAL	30
3326	CCH 3/8 NATURAL	30
3327	CCH 7/16 NATURAL	30
3328	CCH 1/2 NATURAL	30
3329	CCH 9/16 NATURAL	30
3330	CCH 5/8 NATURAL	30
3331	CCH 11/16 NATURAL	30
3332	CCH 3/4 NATURAL	30
3333	CCH 13/16 NATURAL	30
3334	CCH 7/8 NATURAL	30
3335	WCUA 125 GRAY	39
3336	WCUA 250 GRAY	39
3337	WCUA 375 GRAY	39
3338	WCUA 500 GRAY	39
3339	WCUA 562 GRAY	39
3340	CCH 1 NATURAL	30
3341	WCUA 750 GRAY	39
3342	CCH 1-1/8 NATURAL	30
3343	CCH 1-3/16 NATURAL	30
3344	CCH 1-1/4 NATURAL	30
3345	CH LK-95 NATURAL	51
3346	CCH 1-3/8 NATURAL	30
3347	CH LK-196 NATURAL	51
3348	CCH 1-1/2 NATURAL	30
3349	CH SO-6 NATURAL	50
3350	CH SO-8 NATURAL	50
3351	CH SO-10 NATURAL	50
3352	CCL 1/8 BLACK	30
3353	CCL 3/16 BLACK	30
3354	CCL 1/4 BLACK	30
3355	CCL 5/16 BLACK	30
3356	CCL 3/8 BLACK	30
3357	CCL 7/16 BLACK	30
3358	CCL 1/2 BLACK	30
3359	CH SO-12 NATURAL	50
3360	CH SO-14 NATURAL	50
3361	CH SO-16 NATURAL	50
3362	CCL 125-170 BLACK	30
3363	CCL 187-170 BLACK	30
3364	CCL 250-170 BLACK	30
3365	CCL 312-170 BLACK	30
3366	CCL 375-170 BLACK	30
3367	CCL 437-170 BLACK	30
3368	CCL 500-170 BLACK	30
3369	CH SO-18 NATURAL	50
3370	CH SO-20 NATURAL	50
3371	CH SO-22 NATURAL	50
3372	CCH 1/8 BLACK	30
3373	CCH 3/16 BLACK	30
3374	CCH 1/4 BLACK	30
3375	CCH 5/16 BLACK	30
3376	CCH 3/8 BLACK	30
3377	CCH 7/16 BLACK	30
3378	CCH 1/2 BLACK	30
3379	CCH 9/16 BLACK	30
3380	CCH 5/8 BLACK	30
3381	CCH 11/16 BLACK	30
3382	CCH 3/4 BLACK	30
3383	CCH 13/16 BLACK	30
3384	CCH 7/8 BLACK	30
3385	CH SO-24 NATURAL	50
3386	CH SO-26 NATURAL	50
3387	CH SO-28 NATURAL	50
3390	CCH 1 BLACK	30
3391	CH LK-273 NATURAL	51
3392	CCH 1-1/8 BLACK	30
3393	CCH 1-3/16 BLACK	30
3394	CCH 1-1/4 BLACK	30
3395	CH HA-25-125 GRAY	51
3396	CCH 1-3/8 BLACK	30
3397	CH HA-25-250 NATURAL	51
3398	CCH 1-1/2 BLACK	30
3399	HEYWARE LABKIT #5	79
3419	BT 4 PE BLACK	58
3420	BT 4 PE NATURAL	58
3421	BT 4 PE BLUE	58
3422	BT 4 PE RED	58
3423	BT 4 PE YELLOW	58
3424	BT 5 PE BLACK	58
3425	BT 5 PE NATURAL	58
3426	BT 5 PE BLUE	58
3427	BT 5 PE RED	58
3428	BT 5 PE YELLO	58
3429	BT 6 PE BLACK	58
3430	BT 6 PE NATURAL	58
3431	BT 6 PE BLUE	58
3432	BT 6 PE RED	58
3433	BT 6 PE YELLOW	58
3434	BT 8 PE BLACK	58
3435	BT 8 PE NATURAL	58
3436	BT 8 PE BLUE	58
3437	BT 8 PE RED	58
3438	BT 8 PE YELLOW	58
3439	BT 10 PE BLACK	58
3440	BT 10 PE NATURAL	58
3441	BT 10 PE BLUE	58
3442	BT 10 PE RED	58
3443	BT 10 PE YELLOW	58
3476	BT 14 PE BLUE	58
3480	BT 14 PE NATURAL	58
3482	BT 14 PE RED	58
3483	BT 14 PE YELLOW	58
3484	BT 14 PE BLACK	58
3490	BT 4 N NATURAL	58
3491	BT 5 N NATURAL	58
3492	BT 6 N NATURAL	58
3493	BT 8 N NATURAL	58
3494	BT 10 N NATURAL	58
3495	BT 10 N BLACK	58
3496	BT 14 N NATURAL	58
3498	BT 14 N BLACK	58
3509	BT 4 N BLACK	58
3519	BT 5 N BLACK	58
3523	BT 6 N BLACK	58
3524	BT 8 N BLACK	58
3550	MNT 90 NATURAL	54
3555	MNT 120 NATURAL	54
3560	MNT 150 NATURAL	54
3590	MP 2A NATURAL	55
3591	MP 4A-M NATURAL	55
3592	MP R-2 NATURAL	55
3593	MP 4A NATURAL	55

PART NUMBER INDEX

Part #	Description	Page
3594	MP 4A-S NATURAL	55
3596	CH R-20	48
3597	CH R-28	48
3598	CH RJ-625 NATURAL	50
3600	CH R-12 NATURAL	48
3601	CH R-13-3 NATURAL	48
3602	CH L-13-3 NATURAL	48
3603	CH RA-122 NATURAL	49
3605	CH R-18 NATURAL	48
3606	CHR-18-3 NATURAL	48
3607	CH L-18-3 NATURAL	48
3608	CH RA-172 NATURAL	49
3610	CH R-27 NATURAL	48
3611	CH R-27-3 NATURAL	48
3612	CH L-27-3 NATURAL	48
3613	CH RA-267 NATURAL	49
3614	CH RA-121 NATURAL	49
3615	CH R-35 NATURAL	48
3616	CH R-35-3 NATURAL	48
3617	CH L-35-3 NATURAL	48
3618	CH R-11-90 NATURAL	48
3620	CH L-12 NATURAL	48
3625	CH L-18 NATURAL	48
3628	WC A-42 NATURAL	38
3629	WC A-43 NATURAL	38
3630	CH L-27 NATURAL	48
3635	CH L-35 NATURAL	48
3636	WC A-44 NATURAL	38
3637	WC A-46 NATURAL	38
3638	WC A-4 NATURAL	38
3639	WC A-5 NATURAL	38
3652	CH R-27-90 NATURAL	48
3660	CHRS-1 NATURAL 94V-2	47
3661	CHRS-2 NATURAL 94V-2	47
3662	CHRS-3 NATURAL 94V-2	47
3663	CHCS-4 NATURAL	50
3664	WC A-47 NATURAL	38
3665	WC A-48 NATURAL	38
3666	CHCS-10 NATURAL	50
3667	CH R-35-90 NATURAL	48
3668	CHCS-16 NATURAL	50
3697	CH L -27-90 NATURAL	48
3712	CH L -35-90 NATURAL	48
3728	SLCC 1125 BLACK	31
3729	SLCC 1125 NATURAL	31
3730	PLCC 1125 BLACK	31
3731	PLCC 1125 NATURAL	31
3732	SLCC 1187 BLACK	31
3733	SLCC 1187 NATURAL	31
3734	PLCC 1187 BLACK	31
3735	PLCC 1187 NATURAL	31
3736	SLCC 1250 BLACK	31
3737	SLCC 1250 NATURAL	31
3738	PLCC 1250 BLACK	31
3739	PLCC 1250 NATURAL	31
3740	SLCC 1375 BLACK	31
3741	SLCC 1375 NATURAL	31
3742	PLCC 1375 BLACK	31
3743	PLCC 1375 NATURAL	31
3744	SLCC 1500 BLACK	31
3745	SLCC 1500 NATURAL	31
3746	PLCC 1500 BLACK	31
3747	PLCC 1500 NATURAL	31
3753	MP S-10 NATURAL	55
3754	MP S-5/8 NATURAL	55
3759	MP S-8 NATURAL	55
3762	MP PM-25 NATURAL	55
3778	PMLL 250 NATURAL	42
3779	PMLL 375 NATURAL	42
3780	PMLL 500 NATURAL	42
3782	PMLL 750 NATURAL	42
3793	LL 250 NATURAL	42
3795	LL 375 NATURAL	42
3796	LL 1000 NATURAL	42
3797	LL 500 NATURAL	42
3799	LL 750 NATURAL	42
3845	PMWC 187-20 GRAY	44
3846	PMWC 250-20 GRAY	44
3847	PMWC 375-20 GRAY	44
3848	PMWC 500-20 GRAY	44
3849	PMWC 750-20 GRAY	44
3853	PMWC 1000-20 GRAY	44
3857	WCA 187-500 GRAY	45
3858	WCA 250-750 GRAY	45
3859	WCA 375-1000 GRAY	45
3860	WCA 500-1250 GRAY	45
3861	WCA 750-1750 GRAY	45
3867	WCA 1000-4000 GRAY	45
3868	WCA 1500-6000 GRAY	45
3870	PMWC 187-20 BLACK	44
3871	PMWC 250-20 BLACK	44
3872	PMWC 375-20 BLACK	44
3880	PMWC 187-90 GRAY	44
3881	PMWC 250-90 GRAY	44
3882	PMWC 375-90 GRAY	44
3883	PMWC 500-90 GRAY	44
3884	PMWC 750-90 GRAY	44
3885	PMWC 1000-90 GRAY	44
3904	PMT 150 NATURAL	54
3906	PMWC 500-20 BLACK	44
3907	PWMS-155 HSB UV BLACK	54
3908	PMWC 750-20 BLACK	44
3909	PMWC 1000-20 BLACK	44
3910	PMWC 187-90 BLACK	44
3912	PMWC 250-90 BLACK	44
3913	PMWC 375-90 BLACK	44
3914	PMWC 500-90 BLACK	44
3915	PMWC 750-90 BLACK	44
3916	PMWC 1000-90 BLACK	44
3917	WCA 187-500 BLACK	45
3918	WCA 250-750 BLACK	45
3919	WCA 375-1000 BLACK	45
3920	WCA 500-1250 BLACK	45
3921	WCA 750-1750 BLACK	45
3923	WCA 1000-4000 BLACK	45
3930	WCA 1500-6000 BLACK	45
3931	CHCS-10A NATURAL	50
3932	CHCS-10B NATURAL	50
4052	BMLL 28-19 NATURAL	43
4053	BMLL 28-50 NATURAL	43
4056	BMLL 39-19 NATURAL	43
4057	BMLL 39-50 NATURAL	43
4064	SSRP-030 NATURAL	66
4065	SSRP-062 NATURAL	66
4069	SSRP-100 NATURAL	66
4071	SSRP-125 NATURAL	66
4073	SSRP-187 NATURAL	66
4075	SSRP-250 NATURAL	66
4077	SSRC NATURAL	66
4148	WHCX 750 NATURAL	32
4149	WHC 125 NATURAL	32
4150	WHC 250 NATURAL	32
4151	WHC 375 NATURAL	32
4152	WHC 500 NATURAL	32
4153	WHC 625 NATURAL	32
4154	WHC 750 NATURAL	32
4155	PMLL 28-19 NATURAL	42
4156	PMLL 28-50 NATURAL	42
4157	PMLL 28-75 NATURAL	42
4158	PMLL 28-100 NATURAL	42
4160	PMLL 39-19 NATURAL	42
4161	PMLL 39-50 NATURAL	42
4162	PMLL 39-75 NATURAL	42
4163	PMLL 39-100 NATURAL	42
4165	PMLL 50-19 NATURAL	42
4166	PMLL 50-50 NATURAL	42
4167	PMLL 50-75 NATURAL	42
4168	PMLL 50-100 NATURAL	42
4170	PMLL 59-19 NATURAL	42
4171	PMLL 59-50 NATURAL	42
4172	PMLL 59-75 NATURAL	42
4173	PMLL 59-100 NATURAL	42
4175	BMLL 50-19 NATURAL	43
4176	BMLL 50-50 NATURAL	43
4177	BMLL 50-75 NATURAL	43
4180	BMLL 59-19 NATURAL	43
4181	BMLL 59-50 NATURAL	43
4182	BMLL 59-75 NATURAL	43
4185	PMLC 25-19 NATURAL	43
4186	PMLC 25-25 NATURAL	43
4187	PMLC 25-37 NATURAL	43
4188	PMLC 25-50 NATURAL	43
4189	PMLC 25-63 NATURAL	43
4190	PMLC 25-100 NATURAL	43
4191	PMLC 73-19 NATURAL	43
4192	PMLC 73-25 NATURAL	43
4193	PMLC 73-37 NATURAL	43
4194	PMLC 73-50 NATURAL	43
4195	PMLC 73-19-1 NATURAL	43
4196	PMLC 73-25-1 NATURAL	43
4197	PMLC 73-37-1 NATURAL	43
4198	PMLC 73-50-1 NATURAL	43
4199	HMB 125-06 NATURAL	68
4200	HMB 136-06 NATURAL	68
4201	HMB 187-06 NATURAL	68
4202	CH RB-13 NATURAL	49
4203	CH RB-18 NATURAL	49
4204	CH RB-27 NATURAL	49
4205	CH RB-35 NATURAL	49
4206	CH LB-13 NATURAL	49
4207	CH LB-18 NATURAL	49
4208	CH LB-27 NATURAL	49
4209	CH LB-35 NATURAL	49
4210	WHC 1000 NATURAL	32
4211	WHC 1500 NATURAL	32
4212	CH RA-65 NATURAL	49
4213	CH RA-83 NATURAL	49
4214	CH RA-102 NATURAL	49
4215	CH RA-119 NATURAL	49
4216	CH RA-141 NATURAL	49
4217	CH RA-157 NATURAL	49
4218	WC A-2 NATURAL	38
4219	WC A-3 NATURAL	38
4220	CH RB-13-90 NATURAL	49
4221	CH RB-17-90 NATURAL	49
4222	CHRS 58-1 94V-2	47
4223	CHRS 112-1 94V-2	47
4224	CHRS 58-2 94V-2	47
4225	CHRS 112-2 94V-2	47
4226	CHRS 73-1 94V-2	47
4227	CHRS 91-1 94V-2	47
4228	CHRS 112-1 94V-2	47
4229	CHRS 130-1 94V-2	47
4230	CHRS 73-2 94V-2	47
4231	CHRS 91-2 94V-2	47
4232	CHRS 112-2 94V-2	47
4233	CHRS 130-2 94V-2	47
4234	CHRS 73-1-2 94V-2	47
4235	CHRS 91-1-2 94V-2	47
4236	CHRS 112-1-2 94V-2	47
4237	CHRS 130-1-2 94V-2	47
4238	CHRS 73-2-2 94V-2	47
4239	CHRS 91-2-2 94V-2	47
4245	CHRS 41-1 NATURAL 94V-2	47
4246	CH E-14 NATURAL	52
4247	CH E-19 NATURAL	52
4248	CH E-21 NATURAL	52
4249	CH E-27 NATURAL	52
4251	HMP 156-031 NATURAL	67
4252	HMP 156-094 NATURAL	67
4253	HMP 156-189 NATURAL	67
4254	HMP 156-220 NATURAL	67
4255	HMP 156-312 NATURAL	67
4256	HMP 156-375 NATURAL	67
4257	HMP 156-437 NATURAL	67
4258	HMP 156-500 NATURAL	67
4259	HMP 156-563 NATURAL	67
4260	BMLL 28-75 NATURAL	43
4261	BMLL 39-75 NATURAL	43
4262	CHRS 112-2-2 94V-2	47
4263	CHRS 130-2-2 94V-2	47
4264	MP 4-S NATURAL	55
4265	MP 34 NATURAL	55
4266	MP PM-19 NATURAL	55
4267	MP PM-26 NATURAL	55
4268	MP PMB-31 NATURAL	55
4269	MP S-4 NATURAL	55
4271	CH RA-72 NATURAL	49
4272	KC 09-14 NATURAL	69
4273	KC 09-14-1 NATURAL	69

PART NUMBER INDEX

Part #	Description	Page
4274	KC 10-13 NATURAL	69
4275	KC 13-14 NATURAL	69
4276	KC 13-21 NATURAL	69
4277	KC 13-20 NATURAL	69
4278	KC 14-15 NATURAL	69
4279	KC 16-19 NATURAL	69
4282	KC 16-20 NATURAL	69
4283	KC 21-22 NATURAL	69
4284	KC 21-28 NATURAL	69
4285	KC 22-28 NATURAL	69
4286	KC 22-26 NATURAL	69
4287	HHC 09-22 NATURAL	69
4288	HHC 09-25 NATURAL	69
4289	HHC 13-22 NATURAL	69
4292	HHC 16-22 NATURAL	69
4293	HHC 16-25 NATURAL	69
4294	HHC 19-22 NATURAL	69
4295	HHC 22-22 NATURAL	69
4296	HHC 25-22 NATURAL	69
4297	HHC 28-22 NATURAL	69
4298	HHC 31-22 NATURAL	69
4299	HHC 34-22 NATURAL	69
4322	HHC 38-22 NATURAL	69
4323	WCLA 258 NATURAL	45
4324	WCLA 406 NATURAL	45
4325	WCLA 562 NATURAL	45
4326	WCLA 750 NATURAL	45
4327	WCLA 1000 NATURAL	45
4330	HUSR 197-158 BLAC	67
4331	HUSR 236-059 BLACK	67
4332	HUSR 315-118 BLACK	67
4333	HUSR 315-276 BLACK	67
4335	WCLP 562 NATURAL	45
4336	WCLP 750 NATURAL	45
4337	CH R-13-P NATURAL	46
4338	CH R-18-P NATURAL	46
4339	CH R-27-P NATURAL	46
4340	CH R-35-P NATURAL	46
4341	CH L-13-P NATURAL	46
4342	CH L-18-P NATURAL	46
4343	CH L-27-P NATURAL	46
4344	CH L-35-P NATURAL	46
4345	PMLC 50-19 NATURAL	43
4346	PMLC 50-25 NATURAL	43
4347	PMLC 50-37 NATURAL	43
4348	PMLC 50-50 NATURAL	43
4366	PMLC 50-19-1 NATURAL	43
4367	PMLC 50-25-1 NATURAL	43
4368	PMLC 50-37-1 NATURAL	43
4369	PMLC 50-50-1 NATURAL	43
4714	SSRPT-ADJ NATURAL	66
4715	SSRPT-190 NATURAL	66
4716	SSRPT-220 NATURAL	66
4717	SSRPT-340 NATURAL	66
4718	SSRPT-600 NATURAL	66
4719	SSRCT NATURAL	66
8904	CW 187 PE UV BLACK	60
8905	CW 187 PE NATURAL	60
8908	CW 250 PE UV BLACK	60
8909	CW 250 PE NATURAL	60
8912	CW 375 PE UV BLACK	60
8913	CW 375 PE NATURAL	60
8916	CW 500 PE UV BLACK	60
8917	CW 500 PE NATURAL	60
8920	CW 625 PE UV BLACK	60
8921	CW 625 PE NATURAL	60
8924	CW 750 PE UV BLACK	60
8925	CW 750 PE NATURAL	60
8928	CW 1000 PE UV BLACK	60
8929	CW 1000 PE NATURAL	60
8936	CW 187 N UV BLACK	61
8937	CW 187 N NATURAL	61
8940	CW 250 N UV BLACK	61
8941	CW 250 N NATURAL	61
8944	CW 375 N UV BLACK	61
8945	CW 375 N NATURAL	61
8948	CW 500 N UV BLACK	61
8949	CW 500 N NATURAL	61
8952	CW 625 N UV BLACK	61
8953	CW 625 N NATURAL	61
8956	CW 750 N UV BLACK	61
8957	CW 750 N NATURAL	61
8960	CW 1000 N UV BLACK	61
8961	CW 1000 N NATURAL	61
8964	CWG 99 PE BLACK	60
8965	CWG 99 PE RED	60
8966	CWG 126 PE BLACK	60
8967	CWG 126 PE BLUE	60
8968	CWG 153 PE BLACK	60
8969	CWG 153 PE GREEN	60
8970	CWG 181 PE BLACK	60
8971	CWG 181 PE YELLOW	60
8972	CWG 234 PE BLACK	60
8973	CWG 234 PE ORANGE	60
8974	CWG 401 PE BLACK	60
8975	CWG 401 PE GRAY	60
8980	BS 125 BLACK	59
8983	BS 125 FR BLACK	59
8985	BS 250 BLACK	59
8988	BS 250 FR BLACK	59
8990	BS 500 BLACK	59
8993	BS 500 FR BLACK	59
8995	BS 750 BLACK	59
8998	BS 750 FR BLACK	59
9000	BS 1250 BLACK	59
9003	BS 1250 FR BLACK	59
9005	BS 1750 BLACK	59
9008	BS 1750 FR BLACK	59
9010	BS 2.0 BLACK	59
9013	BS 2.0 FR BLACK	59
9020	PR 102-039 BLACK	62
9021	PR 102-039 WHITE	62
9022	PR 102-082 BLACK	62
9023	PR 102-082 WHITE	62
9024	PR 102-106 BLACK	62
9025	PR 102-106 WHITE	62
9026	PR 102-134 BLACK	62
9027	PR 102-134 WHITE	62
9028	PR 122-039 BLACK	62
9029	PR 122-039 WHITE	62
9030	PR 122-079 BLACK	62
9031	PR 122-079 WHITE	62
9032	PR 122-118 BLACK	62
9033	PR 122-118 WHITE	62
9034	PR 122-157 BLACK	62
9035	PR 122-157 WHITE	62
9036	PR 122-197 BLACK	62
9037	PR 122-197 WHITE	62
9038	PR 122-217 BLACK	62
9039	PR 122-217 WHITE	62
9040	PR 122-256 BLACK	62
9041	PR 122-256 WHITE	62
9042	PR 122-295 BLACK	62
9043	PR 122-295 BLACK	62
9044	PR 142-047 BLACK	62
9045	PR 142-047 WHITE	62
9046	PR 142-083 BLACK	62
9047	PR 142-083 WHITE	62
9048	PR 142-106 BLACK	62
9049	PR 142-106 WHITE	62
9050	PR 142-118 BLACK	62
9051	PR 142-118 WHITE	62
9052	PR 142-146 BLACK	62
9053	PR 142-146 WHITE	62
9054	PR 142-177 BLACK	62
9055	PR 142-177 WHITE	62
9056	PR 142-217 BLACK	62
9057	PR 142-217 WHITE	62
9058	PR 161-098 BLACK	19, 62
9059	PR 161-098 WHITE	62
9060	PR 161-138 BLACK	19, 62
9061	PR 161-138 WHITE	62
9062	PR 161-177 BLACK	19, 31, 62
9063	PR 161-177 WHITE	19, 31, 62
9064	PR 161-217 BLACK	19, 31, 62
9065	PR 161-217 WHITE	31, 62
9066	PR 161-256 BLACK	31, 62
9067	PR 161-256 WHITE	31, 62
9068	PR 161-295 BLACK	19, 31, 62
9069	PR 161-295 WHITE	31, 62
9070	PR 201-059 BLACK	63
9071	PR 201-059 WHITE	63
9072	PR 201-098 BLACK	63
9073	PR 201-098 WHITE	63
9074	PR 201-138 BLACK	63
9075	PR 201-138 WHITE	63
9076	PR 201-177 BLACK	31, 63
9077	PR 201-177 WHITE	31, 63
9078	PR 201-217 BLACK	31, 63
9079	PR 201-217 WHITE	31, 63
9080	PR 201-256 BLACK	31, 63
9081	PR 201-256 WHITE	31, 63
9082	PR 201-295 BLACK	31, 63
9083	PR 201-295 WHITE	31, 63
9084	PR 240-098 BLACK	63
9085	PR 240-098 WHITE	63
9087	TF 394-236 BLACK	71
9088	KR 122-039 BLACK	65
9089	KR 122-039 WHITE	65
9090	KR 122-079 BLACK	65
9091	KR 122-079 WHITE	65
9092	KR 122-118 BLACK	65
9093	KR 122-118 WHITE	65
9094	KR 122-157 BLACK	65
9095	KR 122-157 WHITE	65
9096	KR 122-217 BLACK	65
9097	KR 122-217 WHITE	65
9098	KR 142-039 BLACK	65
9099	KR 142-039 WHITE	65
9100	KR 142-079 BLACK	65
9101	KR 142-079 WHITE	65
9102	KR 142-118 BLACK	65
9103	KR 142-118 WHITE	65
9104	KR 142-137 BLACK	65
9105	KR 142-137 BLACK	65
9106	KR 142-177 BLACK	65
9107	KR 142-177 WHITE	65
9108	KR 161-098 BLACK	65
9109	KR 161-098 WHITE	65
9110	KR 161-137 BLACK	65
9111	KR 161-137 WHITE	65
9112	KR 161-177 BLACK	65
9113	KR 161-177 WHITE	65
9114	KR 161-217 BLACK	65
9115	KR 161-217 WHITE	65
9116	KR 161-295 BLACK	65
9117	KR 161-295 WHITE	65
9118	PRH 102-217 BLACK	64
9119	PRH 102-217 WHITE	64
9126	DF 185-039-1 BLACK	65
9127	DF 185-039-1 NATURAL	65
9128	DF 250-059 BLACK	65
9129	DF 250-059 NATURAL	65
9141	DR 161-098 BLACK	64
9142	DR 161-098 NATURAL	64
9156	PRH 122-039 BLACK	64
9157	PRH 122-039 WHITE	64
9158	PRH 122-079 BLACK	64
9159	PRH 122-079 WHITE	64
9160	PRH 122-118 BLACK	64
9161	PRH 122-118 WHITE	64
9162	PRH 122-157 BLACK	64
9163	PRH 122-157 WHITE	64
9164	PRH 122-197 BLACK	64
9165	PRH 122-197 WHITE	64
9166	PRH 122-217 BLACK	64
9167	PRH 122-217 WHITE	64
9168	PRH 122-256 BLACK	64
9169	PRH 122-256 WHITE	64
9170	PRH 122-295 BLACK	64
9171	PRH 122-295 WHITE	64
9172	PRH 142-039 BLACK	64
9173	PRH 142-039 WHITE	64
9174	PRH 142-079 BLACK	64
9175	PRH 142-079 WHITE	64
9176	PRH 142-118 BLACK	64
9177	PRH 142-118 WHITE	64
9178	PRH 142-138 BLACK	64
9179	PRH 142-138 WHITE	64
9180	PRH 142-177 BLACK	64

PART NUMBER INDEX

Part #	Description	Page
9181	PRH 142-177 WHITE	64
9182	PRH 142-217 BLACK	64
9183	PRH 142-217 WHITE	64
9184	DR 189-039 BLACK	64
9185	DR 189-039 NATURAL	64
9186	DR 189-158 BLACK	64
9187	DR 189-158 NATURAL	64
9188	DR 217-094 BLACK	64
9189	DR 217-094 NATURAL	64
9190	DR 252-059 BLACK	64
9191	DR 252-059 NATURAL	64
9192	DR 252-280 BLACK	64
9193	DR 252-280 NATURAL	64
9194	KR 122-197 BLACK	65
9195	KR 122-197 WHITE	65
9196	KR 142-217 BLACK	65
9197	KR 142-217 WHITE	65
9198	KR 161-256 BLACK	65
9199	KR 161-256 WHITE	65
9201	DF-125-039 BLACK	65
9202	DF-125-039 WHITE	65
9203	DF-154-039 BLACK	65
9204	DF-154-039 WHITE	65
9205	DF-185-039 BLACK	65
9206	DF-185-039 WHITE	65
9207	DF-307-059 BLACK	65
9208	DF-307-059 WHITE	65
9209	DF-217-236 BLACK	65
9210	DF-217-236 WHITE	65
9296	PR 083-024 BLACK	62
9297	PR 083-024 WHITE	62
9300	PR 083-051 BLACK	62
9301	PR 083-051 WHITE	62
9302	PR 083-083 BLACK	62
9303	PR 083-083 WHITE	62
9304	PR 083-114 BLACK	62
9305	PR 083-114 WHITE	62
9306	PR 083-146 BLACK	62
9307	PR 083-146 WHITE	62
9308	PR 083-173 BLACK	62
9309	PR 083-173 WHITE	62
9310	PR 102-169 BLACK	62
9311	PR 102-169 WHITE	62
9312	PR 102-201 BLACK	62
9313	PR 102-201 WHITE	62
9314	PR 122-453 BLACK	62
9315	PR 122-453 WHITE	62
9316	PR 122-807 BLACK	62
9317	PR 122-807 WHITE	62
9318	PR 161-354 BLACK	31, 62
9319	PR 161-354 WHITE	31, 62
9320	PR 161-492 BLACK	31, 62
9321	PR 161-492 WHITE	31, 62
9322	PR 232-118 BLACK	63
9323	PR 232-118 WHITE	63
9324	PR 240-138 BLACK	63
9325	PR 240-138 WHITE	63
9349	PRP 122-079 BLACK	66
9350	PRP 122-118 BLACK	66
9351	PRP 122-157 BLACK	66
10716	HSCBS3-02 NATURAL	23
10717	HSCBS3-03 NATURAL	23
10718	HSCBS3-04 NATURAL	23
10719	HSCBS3-05 NATURAL	23
10720	HSCBS3-06 NATURAL	23
10721	HSCBS3-07 NATURAL	23
10722	HSCBS3-08 NATURAL	23
10723	HSCBS3-09 NATURAL	23
10724	HSCBS3-10 NATURAL	23
11011	HLEDS2M-120 NATURAL	28
11012	HLEDS2M-140 NATURAL	28
11013	HLEDS2M-160 NATURAL	28
11014	HLEDS2M-180 NATURAL	28
11015	HLEDS2M-200 NATURAL	28
11016	HLEDS2M-220 NATURAL	28
11017	HLEDS2M-240 NATURAL	28
11025	HLEDS3-03 BLACK PVC	29
11026	HLEDS3-04 BLACK PVC	29
11027	HLEDS3-06 BLACK PVC	29
11028	HLEDS3-08 BLACK PVC	29
11032	HLEDS1E-03 NATURAL	29
11033	HLEDS1E-04 NATURAL	29
11034	HLEDS1E-06 NATURAL	29
11035	HLEDS1E-08 NATURAL	29
11036	HLEDS1E-10 NATURAL	29
11037	HLEDS1E-12 NATURAL	29
11038	HLEDS1E-14 NATURAL	29
11039	HLEDS1E-16 NATURAL	29
11041	HLEDS2E-03 NATURAL	29
11042	HLEDS2E-04 NATURAL	29
11043	HLEDS2E-06 NATURAL	29
11044	HLEDS2E-08 NATURAL	29
11045	HLEDS2E-10 NATURAL	29
11046	HLEDS2E-12 NATURAL	29
11047	HLEDS2E-14 NATURAL	29
11048	HLEDS2E-16 NATURAL	29
12801	NTSS-0150-46A SS	57
12802	NTSS-0200-46A SS	57
12803	NTSS-0250-46A SS	57
12805	NTSS-0300-46A SS	57
12806	NTSS-0350-46A SS	57
12808	NTSS-0400-46A SS	57
12810	NTSS-0500-46A SS	57
12812	NTSS-0600-46A SS	57
12814	NTSS-0800-46A SS	57
12821	NTSS-0200-79A SS	57
12822	NTSS-0250-79A SS	57
12824	NTSS-0300-79A SS	57
12825	NTSS-0350-79A SS	57
12827	NTSS-0400-79A SS	57
12829	NTSS-0500-79A SS	57
12831	NTSS-0600-79A SS	57
12833	NTSS-0700-79A SS	57
12834	NTSS-0800-79A SS	57
12836	NTSS-1000-79A SS	57
13000	NTMP-018-039 NATURAL	56
13001	NTMP-036-059 NATURAL	56
13002	NTMP-036-079 NATURAL	56
13003	NTMP-045-098 NATURAL	56
13004	NTMP-045-110 NATURAL	56
13008	NTMP-056-079 NATURAL	56
13009	NTMP-056-094 NATURAL	56
13010	NTMP-056-118 NATURAL	56
13011	NTMP-112-118 NATURAL	56
13012	NTMP-112-138 NATURAL	56
13013	NTMP-112-157 NATURAL	56
13014	NTMP-124-177 NATURAL	56
13015	NTMP-124-197 NATURAL	56
13050	CCSA 1/8 NATURAL	34
13051	CCSA 3/16 NATRUAL	34
13052	CCSA 1/4 NATURAL	34
13053	CCSA 5/16 NATURAL	34
13054	CCSA 3/8 NATURAL	34
13056	CCSA 1/2 NATURAL	34
13058	CCSA 5/8 NATURAL	34
13060	CCSA 3/4 NATURAL	34
13062	CCSA 1 NATURAL	34
13100	NT-18-031 NATURAL	54
13102	NT-18-040 NATURAL	54
13105	NT-18-047 NATURAL	54
13107	NT-18-059 NATURAL	54
13108	NT-18-060 NATURAL	54
13111	NT-18-080 NATURAL	54
13120	NT-40-040 NATURAL	54
13121	NT-40-047 NATURAL	54
13122	NT-40-055 NATURAL	54
13123	NT-40-059 NATURAL	54
13124	NT-40-070 NATURAL	54
13126	NT-40-080 NATURAL	54
13128	NT-40-098 NATURAL	54
13129	NT-40-110 NATURAL	54
13130	NT-40-118 NATURAL	54
13134	NT-40-145 NATURAL	54
13140	NT-50-047 NATURAL	54
13142	NT-50-063 NATURAL	54
13143	NT-50-070 NATURAL	54
13144	NT-50-075 NATURAL	54
13145	NT-50-078 NATURAL	54
13147	NT-50-098 NATURAL	54
13149	NT-50-110 NATURAL	54
13151	NT-50-118 NATURAL	54
13153	NT-50-137 NATURAL	54
13155	NT-50-145 NATURAL	54
13156	NT-50-157 NATURAL	54
13158	NT-50-177 NATURAL	54
13160	NT-50-196 NATURAL	54
0170	HAT HOSE CLAMP W/0T83 & 0T84	33
0301	AC 1 NATURAL	68
0301B	AC 1 BLACK	68
0302	AC 2 NATURAL	68
0302B	AC 2 BLACK	68
0303	PFT 27-16 NATURAL	70
0304	AC 4 NATURAL	68
0304B	AC 4 BLACK	68
0305	AC 5 NATURAL	68
0305B	AC 5 BLACK	68
0306	AC 6 NATURAL	68
0306B	AC 6 BLACK	68
0307	AC 7 NATURAL	68
0307B	AC 7 BLACK	68
0308	PFT 27-24 NATURAL	70
0309	AC 9 NATURAL	68
0309B	AC 9 BLACK	68
0310	PFT 28-24 NATURAL	70
0311	AC 11 NATURAL	68
0311B	AC 11 BLACK	68
0312	PFT 32-16 NATURAL	70
0313	AC 13 NATURAL	68
0313B	AC 13 BLACK	68
0314	AC 14 NATURAL	68
0314B	AC 14 BLACK	68
0315	AC 15 NATURAL	68
0315B	AC 15 BLACK	68
0316	AC 16 NATURAL	68
0316B	AC 16 BLACK	68
0317	AC 17 NATURAL	68
0317B	AC 17 BLACK	68
0318	AC 18 NATURAL	68
0318B	AC 18 BLACK	68
0319	PFT 32-12 NATURAL	70
0321	AC 21 NATURAL	68
0321B	AC 21 BLACK	68
0322	PFT 34-17 NATURAL	70
0323	PFT 37-25 NATURAL	70
0324	AC 24 NATURAL	68
0324B	AC 24 BLACK	68
0325	AC 1996 NATURAL	68
0325B	AC 1996 BLACK	68
0326	AC 1668 NATURAL	68
0326B	AC 1668 BLACK	68
0327	PFT 38-24 NATURAL	70
0328	AC 28 NATURAL	68
0328B	AC 28 BLACK	68
0329	PFT 40-14 NATURAL	70
0330	PFT 41-28 NATURAL	70
0331	PFT 43-14 NATURAL	70
0332	PFT 48-24 NATURAL	70
0333	PFT 55-18 NATURAL	70
0334	PFT 70-25 NATURAL	70
0335	PFT 88-24 NATURAL	70
0336	PFT 88-25 NATURAL	70
0337	PFT 89-26 NATURAL	70
0338	PFT 100-35 NATURAL	70
0339	PF 115-125 NATURAL	70
0339B	PF 125-125 BLACK	70
0340	PF 093-093 NATURAL	70
0340B	PF 093-093 BLACK	70
0341	PF 121-089 NATURAL	70
0341B	PF 121-089 BLACK	70
0342	PF 190-155 NATURAL	70
0342B	PF 190-155 BLACK	70
0343	PF 156-115 NATURAL	70
0343B	PF 156-115 BLACK	70
0344	PFT 102-35 NATURAL	70
0347	PF 121-115 NATURAL	70
0347B	PF 121-115 BLACK	70
0350	PF 133-175 NATURAL	70
0350B	PF 133-175 BLACK	70
0351	PF 065-165 NATURAL	70
0351B	PF 065-165 BLACK	70

PART NUMBER INDEX

Part #	Description	Page
0352	PF 237-200 NATURAL	70
0352B	PF 237-200 BLACK	70
0353	PF 250-200 NATURAL	70
0353B	PF 250-200 BLACK	70
0358	PF 121-200 NATURAL	70
0358B	PF 121-200 BLACK	70
0360	PF 156-210 NATURAL	70
0360B	PF 156-210 BLACK	70
0361	PFT 38-20 NATURAL	70
0362	PF 250-218 NATURAL	70
0362B	PF 250-218 BLACK	70
0370	PF 171-260 NATURAL	70
0370B	PF 171-260 BLACK	70
0371	PF 250-240 NATURAL	70
0371B	PF 250-240 BLACK	70
0384	PF 098-245 NATURAL	70
0384B	PF 098-245 BLACK	70
0998	NYTYE TOOL - STANDARD	54
0T83	MOVABLE JAW	33
0T84	SOLID JAW	33
10000	HSP1-03 NATURAL	4
10001	HSP1-04 NATURAL	4
10002	HSP1-05 NATURAL	4
10003	HSP1-06 NATURAL	4
10004	HSP1-07 NATURAL	4
10005	HSP1-08 NATURAL	4
10006	HSP1-09 NATURAL	4
10007	HSP1-10 NATURAL	4
10008	HSP1-12 NATURAL	4
10009	HSP1-14 NATURAL	4
10010	HSP1-16 NATURAL	4
10012	HSP2-03 NATURAL	4
10013	HSP2-04 NATURAL	4
10014	HSP2-05 NATURAL	4
10015	HSP2-06 NATURAL	4
10016	HSP2-07 NATURAL	4
10017	HSP2-08 NATURAL	4
10018	HSP2-09 NATURAL	4
10019	HSP2-10 NATURAL	4
10020	HSP2-12 NATURAL	4
10021	HSP2-14 NATURAL	4
10022	HSP2-16 NATURAL	4
10024	HSP3-03 NATURAL	4
10025	HSP3-04 NATURAL	4
10026	HSP3-05 NATURAL	4
10027	HSP3-06 NATURAL	4
10028	HSP3-07 NATURAL	4
10029	HSP3-08 NATURAL	4
10030	HSP3-09 NATURAL	4
10031	HSP3-10 NATURAL	4
10032	HSP3-12 NATURAL	4
10033	HSP3-14 NATURAL	4
10034	HSP3-16 NATURAL	4
10036	HDLSPTH-01 NATURAL	4
10037	HDLSPTH-02 NATURAL	4
10038	HDLSPTH-03 NATURAL	4
10039	HDLSPTH-04 NATURAL	4
10040	HDLSPTH-05 NATURAL	4
10041	HDLSPTH-06 NATURAL	4
10042	HDLSPTH-07 NATURAL	4
10043	HDLSPTH-08 NATURAL	4
10044	HDLSPTH-09 NATURAL	4
10045	HDLSPTH-10 NATURAL	4
10046	HDLSPTH-14 NATURAL	4
10048	HLSP1-03 NATURAL	5
10049	HLSP1-04 NATURAL	5
10050	HLSP1-05 NATURAL	5
10051	HLSP1-06 NATURAL	5
10052	HLSP1-07 NATURAL	5
10053	HLSP1-08 NATURAL	5
10054	HLSP1-10 NATURAL	5
10055	HLSP1-12 NATURAL	5
10056	HLSP1-14 NATURAL	5
10057	HLSP1-16 NATURAL	5
10058	HLSP1-18 NATURAL	5
10059	HLSP1-20 NATURAL	5
10060	HLSP1-22 NATURAL	5
10062	HLSP2-03 NATURAL	5
10063	HLSP2-04 NATURAL	5
10064	HLSP2-05 NATURAL	5
10065	HLSP2-06 NATURAL	5
10066	HLSP2-07 NATURAL	5
10067	HLSP2-08 NATURAL	5
10068	HLSP2-10 NATURAL	5
10069	HLSP2-12 NATURAL	5
10070	HLSP2-14 NATURAL	5
10071	HLSP2-16 NATURAL	5
10072	HLSP2-18 NATURAL	5
10073	HLSP2-20 NATURAL	5
10074	HLSP2-22 NATURAL	5
10076	HLSP3-03 NATURAL	5
10077	HLSP3-04 NATURAL	5
10078	HLSP3-05 NATURAL	5
10079	HLSP3-06 NATURAL	5
10080	HLSP3-07 NATURAL	5
10081	HLSP3-08 NATURAL	5
10082	HLSP3-10 NATURAL	5
10083	HLSP3-12 NATURAL	5
10084	HLSP3-14 NATURAL	5
10085	HLSP3-16 NATURAL	5
10086	HLSP3-18 NATURAL	5
10087	HLSP3-20 NATURAL	5
10088	HLSP3-22 NATURAL	5
10090	HLSP4-03 NATURAL	5
10091	HLSP4-04 NATURAL	5
10092	HLSP4-05 NATURAL	5
10093	HLSP4-06 NATURAL	5
10094	HLSP4-07 NATURAL	5
10095	HLSP4-08 NATURAL	5
10096	HLSP4-10 NATURAL	5
10097	HLSP4-12 NATURAL	5
10098	HLSP4-14 NATURAL	5
10099	HLSP4-16 NATURAL	5
10100	HLSP4-18 NATURAL	5
10101	HLSP4-20 NATURAL	5
10102	HLSP4-22 NATURAL	5
10104	HLSP5-03 NATURAL	6
10105	HLSP5-04 NATURAL	6
10106	HLSP5-05 NATURAL	6
10107	HLSP5-06 NATURAL	6
10108	HLSP5-07 NATURAL	6
10109	HLSP5-08 NATURAL	6
10110	HLSP5-10 NATURAL	6
10111	HLSP5-12 NATURAL	6
10112	HLSP5-14 NATURAL	6
10113	HLSP5-16 NATURAL	6
10114	HLSP5-18 NATURAL	6
10115	HLSP5-20 NATURAL	6
10116	HLSP5-22 NATURAL	6
10118	HLSP6-03 NATURAL	6
10119	HLSP6-04 NATURAL	6
10120	HLSP6-05 NATURAL	6
10121	HLSP6-06 NATURAL	6
10122	HLSP6-07 NATURAL	6
10123	HLSP6-08 NATURAL	6
10124	HLSP6-10 NATURAL	6
10125	HLSP6-12 NATURAL	6
10126	HLSP6-14 NATURAL	6
10127	HLSP6-16 NATURAL	6
10128	HLSP6-18 NATURAL	6
10129	HLSP6-20 NATURAL	6
10130	HLSP6-22 NATURAL	6
10132	HLSP7-03 NATURAL	6
10133	HLSP7-04 NATURAL	6
10134	HLSP7-05 NATURAL	6
10135	HLSP7-06 NATURAL	6
10136	HLSP7-07 NATURAL	6
10137	HLSP7-08 NATURAL	6
10138	HLSP7-10 NATURAL	6
10139	HLSP7-12 NATURAL	6
10140	HLSP7-14 NATURAL	6
10141	HLSP7-16 NATURAL	6
10142	HLSP7-18 NATURAL	6
10143	HLSP7-20 NATURAL	6
10144	HLSP7-22 NATURAL	6
10146	HLSP8-03 NATURAL	6
10147	HLSP8-04 NATURAL	6
10148	HLSP8-05 NATURAL	6
10149	HLSP8-06 NATURAL	6
10150	HLSP8-07 NATURAL	6
10151	HLSP8-08 NATURAL	6
10152	HLSP8-10 NATURAL	6
10153	HLSP8-12 NATURAL	6
10154	HLSP8-14 NATURAL	6
10155	HLSP8-16 NATURAL	6
10156	HLSP8-18 NATURAL	6
10157	HLSP8-20 NATURAL	6
10158	HLSP8-22 NATURAL	6
10160	HLSP9-02 NATURAL	7
10161	HLSP9-03 NATURAL	7
10162	HLSP9-04 NATURAL	7
10163	HLSP9-05 NATURAL	7
10164	HLSP9-06 NATURAL	7
10165	HLSP9-07 NATURAL	7
10166	HLSP9-08 NATURAL	7
10167	HLSP9-09 NATURAL	7
10168	HLSP9-10 NATURAL	7
10170	HLSP10-03 NATURAL	7
10171	HLSP10-04 NATURAL	7
10172	HLSP10-06 NATURAL	7
10173	HLSP10-08 NATURAL	7
10174	HLSP10-10 NATURAL	7
10175	HLSP10-12 NATURAL	7
10176	HLSP10-14 NATURAL	7
10178	HLSP11-02 NATURAL	7
10179	HLSP11-03 NATURAL	7
10180	HLSP11-04 NATURAL	7
10181	HLSP11-05 NATURAL	7
10182	HLSP11-06 NATURAL	7
10183	HLSP11-07 NATURAL	7
10184	HLSP11-08 NATURAL	7
10185	HLSP11-09 NATURAL	7
10186	HLSP11-10 NATURAL	7
10187	HLSP11-12 NATURAL	7
10188	HLSP11-14 NATURAL	7
10190	HTLSP-02 NATURAL	7
10191	HTLSP-03 NATURAL	7
10192	HTLSP-04 NATURAL	7
10193	HTLSP-05 NATURAL	7
10194	HTLSP-06 NATURAL	7
10195	HTLSP-07 NATURAL	7
10196	HTLSP-08 NATURAL	7
10197	HTLSP-10 NATURAL	7
10199	HDLSP4-03 NATURAL	8
10200	HDLSP4-04 NATURAL	8
10201	HDLSP4-05 NATURAL	8
10202	HDLSP4-06 NATURAL	8
10203	HDLSP4-07 NATURAL	8
10204	HDLSP4-08 NATURAL	8
10205	HDLSP4-09 NATURAL	8
10206	HDLSP4-10 NATURAL	8
10207	HDLSP4-14 NATURAL	8
10209	HDLSP5-03 NATURAL	8
10210	HDLSP5-04 NATURAL	8
10211	HDLSP5-06 NATURAL	8
10212	HDLSP5-08 NATURAL	8
10213	HDLSP5-10 NATURAL	8
10214	HDLSP5-12 NATURAL	8
10215	HDLSP5-14 NATURAL	8
10217	HDLSP6-03 NATURAL	8
10218	HDLSP6-04 NATURAL	8
10219	HDLSP6-06 NATURAL	8
10220	HDLSP6-08 NATURAL	8
10221	HDLSP6-10 NATURAL	8
10222	HDLSP6-12 NATURAL	8
10223	HDLSP6-14 NATURAL	8
10225	HDLSP7-03 NATURAL	8
10226	HDLSP7-04 NATURAL	8
10227	HDLSP7-06 NATURAL	8
10228	HDLSP7-08 NATURAL	8
10229	HDLSP7-10 NATURAL	8
10230	HDLSP7-12 NATURAL	8
10231	HDLSP7-14 NATURAL	8
10233	HPS-03 NATURAL	9
10234	HPS-04 NATURAL	9
10235	HPS-05 NATURAL	9
10236	HPS-06 NATURAL	9
10237	HPS-07 NATURAL	9
10238	HPS-08 NATURAL	9
10239	HPS-10 NATURAL	9

PART NUMBER INDEX

Part #	Description	Page
10240	HPS-12 NATURAL	9
10241	HPS-14 NATURAL	9
10243	HMCBP-01 NATURAL	10
10244	HMCBP-02 NATURAL	10
10245	HMCBP-03 NATURAL	10
10246	HMCBP-04 NATURAL	10
10247	HMCBP-05 NATURAL	10
10248	HMCBP-06 NATURAL	10
10249	HMCBP-07 NATURAL	10
10250	HMCBP-08 NATURAL	10
10251	HMCBP-09 NATURAL	10
10252	HMCBP-10 NATURAL	10
10253	HMCBP-11 NATURAL	10
10254	HMCBP-12 NATURAL	10
10255	HMCBP-13 NATURAL	10
10256	HMCBP-14 NATURAL	10
10257	HMCBP-16 NATURAL	10
10258	HMCBP-18 NATURAL	10
10259	HMCBP-20 NATURAL	10
10260	HMCBP-22 NATURAL	10
10261	HMCBP-24 NATURAL	10
10263	HCBP-02 NATURAL	10
10264	HCBP-03 NATURAL	10
10265	HCBP-04 NATURAL	10
10266	HCBP-05 NATURAL	10
10267	HCBP-06 NATURAL	10
10268	HCBP-07 NATURAL	10
10269	HCBP-08 NATURAL	10
10270	HCBP-09 NATURAL	10
10271	HCBP-10 NATURAL	10
10272	HCBP-11 NATURAL	10
10273	HCBP-12 NATURAL	10
10274	HCBP-13 NATURAL	10
10275	HCBP-14 NATURAL	10
10276	HCBP-16 NATURAL	10
10277	HCBP-18 NATURAL	10
10278	HCBP-20 NATURAL	10
10279	HCBP-22 NATURAL	10
10280	HCBP-24 NATURAL	10
10282	HMSPDLN-02 NATURAL	10
10283	HMSPDLN-03 NATURAL	10
10284	HMSPDLN-04 NATURAL	10
10285	HMSPDLN-05 NATURAL	10
10286	HMSPDLN-06 NATURAL	10
10287	HMSPDLN-07 NATURAL	10
10288	HMSPDLN-08 NATURAL	10
10289	HMSPDLN-09 NATURAL	10
10290	HMSPDLN-10 NATURAL	10
10291	HMSPDLN-11 NATURAL	10
10292	HMSPDLN-12 NATURAL	10
10293	HMSPDLN-13 NATURAL	10
10294	HMSPDLN-14 NATURAL	10
10295	HMSPDLN-16 NATURAL	10
10296	HMSPDLN-18 NATURAL	10
10297	HMSPDLN-20 NATURAL	10
10298	HMSPDLN-22 NATURAL	10
10299	HMSPDLN-24 NATURAL	10
10301	HMSPDL-02 NATURAL	10
10302	HMSPDL-03 NATURAL	10
10303	HMSPDL-04 NATURAL	10
10304	HMSPDL-05 NATURAL	10
10305	HMSPDL-06 NATURAL	10
10306	HMSPDL-07 NATURAL	10
10307	HMSPDL-08 NATURAL	10
10308	HMSPDL-09 NATURAL	10
10309	HMSPDL-10 NATURAL	10
10310	HMSPDL-11 NATURAL	10
10311	HMSPDL-12 NATURAL	10
10312	HMSPDL-13 NATURAL	10
10313	HMSPDL-14 NATURAL	10
10314	HMSPDL-16 NATURAL	10
10315	HMSPDL-18 NATURAL	10
10316	HMSPDL-20 NATURAL	10
10317	HMSPDL-22 NATURAL	10
10318	HMSPDL-24 NATURAL	10
10320	HMSPS-03 NATURAL	11
10321	HMSPS-04 NATURAL	11
10322	HMSPS-05 NATURAL	11
10323	HMSPS-06 NATURAL	11
10324	HMSPS-07 NATURAL	11
10325	HMSPS-08 NATURAL	11
10326	HMSPS-10 NATURAL	11
10327	HMSPS-11 NATURAL	11
10328	HMSPS-12 NATURAL	11
10329	HMSPS-14 NATURAL	11
10331	HMPS-02 NATURAL	11
10332	HMPS-03 NATURAL	11
10333	HMPS-04 NATURAL	11
10334	HMPS-05 NATURAL	11
10335	HMPS-06 NATURAL	11
10336	HMPS-07 NATURAL	11
10337	HMPS-08 NATURAL	11
10338	HMPS-09 NATURAL	11
10339	HMPS-10 NATURAL	11
10341	HPS-TD-01 NATURAL	11
10342	HPS-TD-02 NATURAL	11
10343	HPS-TD-03 NATURAL	11
10344	HPS-TD-04 NATURAL	11
10345	HPS-TD-05 NATURAL	11
10346	HPS-TD-06 NATURAL	11
10347	HPS-TD-07 NATURAL	11
10348	HPS-TD-08 NATURAL	11
10349	HPS-TD-09 NATURAL	11
10350	HPS-TD-10 NATURAL	11
10352	HSP-MDL-3-01 NATURAL	11
10353	HSP-MDL-3-02 NATURAL	11
10354	HSP-MDL-3-03 NATURAL	11
10355	HSP-MDL-3-04 NATURAL	11
10356	HSP-MDL-3-05 NATURAL	11
10357	HSP-MDL-3-06 NATURAL	11
10359	HLCBSC2-04 NATURAL	14
10360	HLCBSC2-05 NATURAL	14
10361	HLCBSC2-06 NATURAL	14
10362	HLCBSC2-07 NATURAL	14
10363	HLCBSC2-08 NATURAL	14
10364	HLCBSC2-09 NATURAL	14
10365	HLCBSC2-10 NATURAL	14
10367	HLCBSC3-04 NATURAL	14
10368	HLCBSC3-05 NATURAL	14
10369	HLCBSC3-06 NATURAL	14
10370	HLCBSC3-07 NATURAL	14
10371	HLCBSC3-08 NATURAL	14
10372	HLCBSC3-09 NATURAL	14
10373	HLCBSC3-10 NATURAL	14
10375	HLCBSC4-03 NATURAL	14
10376	HLCBSC4-04 NATURAL	14
10377	HLCBSC4-05 NATURAL	14
10378	HLCBSC4-06 NATURAL	14
10379	HLCBSC4-08 NATURAL	14
10380	HLCBSC4-12 NATURAL	14
10382	HLCBSC5-04 NATURAL	14
10383	HLCBSC5-06 NATURAL	14
10384	HLCBSC5-08 NATURAL	14
10385	HLCBSC5-10 NATURAL	14
10387	HLCBSC6-04 NATURAL	15
10388	HLCBSC6-06 NATURAL	15
10389	HLCBSC6-08 NATURAL	15
10390	HLCBSC6-10 NATURAL	15
10392	HLCBSC7-04 NATURAL	15
10393	HLCBSC7-06 NATURAL	15
10394	HLCBSC7-08 NATURAL	15
10395	HLCBSC7-10 NATURAL	15
10397	HLCBSC8-04 NATURAL	15
10398	HLCBSC8-05 NATURAL	15
10399	HLCBSC8-06 NATURAL	15
10400	HLCBSC8-07 NATURAL	15
10401	HLCBSC8-08 NATURAL	15
10402	HLCBSC8-09 NATURAL	15
10403	HLCBSC8-10 NATURAL	15
10405	HLCBSC9-04 NATURAL	15
10406	HLCBSC9-05 NATURAL	15
10407	HLCBSC9-06 NATURAL	15
10408	HLCBSC9-07 NATURAL	15
10409	HLCBSC9-08 NATURAL	15
10410	HLCBSC9-09 NATURAL	15
10411	HLCBSC9-10 NATURAL	15
10413	HLCBSC11-06 NATURAL	16
10414	HLCBSC11-7.8 NATURAL	16
10415	HLCBSC11-08 NATURAL	16
10416	HLCBSC11-10 NATURAL	16
10417	HLCBSC11-12 NATURAL	16
10418	HLCBSC11-14 NATURAL	16
10420	HLCBSC12-2-06 NATURAL	16
10421	HLCBSC12-2-08 NATURAL	16
10422	HLCBSC12-2-10 NATURAL	16
10423	HLCBSC12-2-12 NATURAL	16
10424	HLCBSC12-2-14 NATURAL	16
10426	HLCBSC13-03 NATURAL	16
10427	HLCBSC13-04 NATURAL	16
10428	HLCBSC13-05 NATURAL	16
10429	HLCBSC13-06 NATURAL	16
10430	HLCBSC13-08 NATURAL	16
10431	HLCBSC13-12 NATURAL	16
10433	HLCBSC-06M NATURAL	17
10434	HLCBSC-08M NATURAL	17
10435	HLCBSC-10M NATURAL	17
10436	HLCBSC-12M NATURAL	17
10437	HLCBSC-14M NATURAL	17
10439	HLCBSC10-08M NATURAL	17
10440	HLCBSC10-10M NATURAL	17
10441	HLCBSC10-12M NATURAL	17
10442	HLCBSC10-14M NATURAL	17
10444	HSP-MDL-1-02M NATURAL	12
10445	HSP-MDL-1-03M NATURAL	12
10446	HSP-MDL-1-04M NATURAL	12
10447	HSP-MDL-1-05M NATURAL	12
10448	HSP-MDL-1-06M NATURAL	12
10449	HSP-MDL-1-07M NATURAL	12
10450	HSP-MDL-1-08M NATURAL	12
10451	HSP-MDL-1-09M NATURAL	12
10452	HSP-MDL-1-10M NATURAL	12
10453	HSP-MDL-1-12M NATURAL	12
10454	HSP-MDL-1-14M NATURAL	12
10455	HSP-MDL-1-16M NATURAL	12
10456	HSP-MDL-1-18M NATURAL	12
10457	HSP-MDL-1-20M NATURAL	12
10458	HSP-MDL-1-22M NATURAL	12
10459	HSP-MDL-1-26.5M NATURAL	12
10461	HSP-MDL-2-02M NATURAL	12
10462	HSP-MDL-2-03M NATURAL	12
10463	HSP-MDL-2-04M NATURAL	12
10464	HSP-MDL-2-05M NATURAL	12
10465	HSP-MDL-2-06M NATURAL	12
10466	HSP-MDL-2-07M NATURAL	12
10467	HSP-MDL-2-08M NATURAL	12
10468	HSP-MDL-2-09M NATURAL	12
10469	HSP-MDL-2-10M NATURAL	12
10470	HSP-MDL-2-12M NATURAL	12
10471	HSP-MDL-2-14M NATURAL	12
10472	HSP-MDL-2-16M NATURAL	12
10473	HSP-MDL-2-18M NATURAL	12
10474	HSP-MDL-2-20M NATURAL	12
10475	HSP-MDL-2-22M NATURAL	12
10476	HSP-MDL-2-26.5M NATURAL	12
10478	HSP-MDLS-1-02M NATURAL	12
10479	HSP-MDLS-1-03M NATURAL	12
10480	HSP-MDLS-1-04M NATURAL	12
10481	HSP-MDLS-1-05M NATURAL	12
10482	HSP-MDLS-1-06M NATURAL	12
10483	HSP-MDLS-1-07M NATURAL	12
10484	HSP-MDLS-1-08M NATURAL	12
10485	HSP-MDLS-1-10M NATURAL	12
10486	HSP-MDLS-1-12M NATURAL	12
10487	HSP-MDLS-1-14M NATURAL	12
10488	HSP-MDLS-1-16M NATURAL	12
10489	HSP-MDLS-1-18M NATURAL	12
10490	HSP-MDLS-1-20M NATURAL	12
10491	HSP-MDLS-1-22M NATURAL	12
10493	HSP-MDLS-2-02M NATURAL	12
10494	HSP-MDLS-2-03M NATURAL	12
10495	HSP-MDLS-2-04M NATURAL	12
10496	HSP-MDLS-2-05M NATURAL	12
10497	HSP-MDLS-2-06M NATURAL	12
10498	HSP-MDLS-2-07M NATURAL	12
10499	HSP-MDLS-2-08M NATURAL	12
10500	HSP-MDLS-2-10M NATURAL	12
10501	HSP-MDLS-2-12M NATURAL	12
10502	HSP-MDLS-2-14M NATURAL	12
10503	HSP-MDLS-2-16M NATURAL	12
10504	HSP-MDLS-2-18M NATURAL	12

PART NUMBER INDEX

Part #	Description	Page
10505	HSP-MDLS-2-20M NATURAL	12
10506	HSP-MDLS-2-22M NATURAL	12
10508	HSP-MDL-AH-1-02M NATURAL	13
10509	HSP-MDL-AH-1-03M NATURAL	13
10510	HSP-MDL-AH-1-04M NATURAL	13
10511	HSP-MDL-AH-1-05M NATURAL	13
10512	HSP-MDL-AH-1-06M NATURAL	13
10513	HSP-MDL-AH-1-07M NATURAL	13
10514	HSP-MDL-AH-1-08M NATURAL	13
10515	HSP-MDL-AH-1-10M NATURAL	13
10516	HSP-MDL-AH-1-12M NATURAL	13
10517	HSP-MDL-AH-1-14M NATURAL	13
10518	HSP-MDL-AH-1-16M NATURAL	13
10519	HSP-MDL-AH-1-18M NATURAL	13
10520	HSP-MDL-AH-1-20M NATURAL	13
10521	HSP-MDL-AH-1-22M NATURAL	13
10523	HDLSP1-03M NATURAL	13
10524	HDLSP1-04M NATURAL	13
10525	HDLSP1-06M NATURAL	13
10526	HDLSP1-08M NATURAL	13
10527	HDLSP1-10M NATURAL	13
10528	HDLSP1-12M NATURAL	13
10529	HDLSP1-14M NATURAL	13
10530	HDLSP1-16M NATURAL	13
10531	HDLSP1-18M NATURAL	13
10533	HDLSP2-03M NATURAL	13
10534	HDLSP2-04M NATURAL	13
10535	HDLSP2-06M NATURAL	13
10536	HDLSP2-08M NATURAL	13
10537	HDLSP2-10M NATURAL	13
10538	HDLSP2-12M NATURAL	13
10539	HDLSP2-14M NATURAL	13
10540	HDLSP2-16M NATURAL	13
10541	HDLSP2-18M NATURAL	13
10543	HDLSP3-03M NATURAL	13
10544	HDLSP3-04M NATURAL	13
10545	HDLSP3-06M NATURAL	13
10546	HDLSP3-08M NATURAL	13
10547	HDLSP3-10M NATURAL	13
10548	HDLSP3-12M NATURAL	13
10549	HDLSP3-14M NATURAL	13
10550	HDLSP3-16M NATURAL	13
10551	HDLSP3-18M NATURAL	13
10553	HBS-03 NATURAL	18
10554	HBS-04 NATURAL	18
10555	HBS-06 NATURAL	18
10556	HBS-07 NATURAL	18
10557	HBS-08 NATURAL	18
10558	HBS-10 NATURAL	18
10559	HBS-12 NATURAL	18
10560	HBS-14 NATURAL	18
10562	HBS2-03 NATURAL	18
10563	HBS2-04 NATURAL	18
10564	HBS2-06 NATURAL	18
10565	HBS2-07 NATURAL	18
10566	HBS2-08 NATURAL	18
10567	HBS2-10 NATURAL	18
10568	HBS2-12 NATURAL	18
10569	HBS2-14 NATURAL	18
10571	HBS3-04 NATURAL	18
10572	HBS3-06 NATURAL	18
10573	HBS3-08 NATURAL	18
10574	HBS3-10 NATURAL	18
10575	HBS3-12 NATURAL	18
10576	HBS3-14 NATURAL	18
10578	HBS4-03 NATURAL	18
10579	HBS4-04 NATURAL	18
10580	HBS4-06 NATURAL	18
10581	HBS4-07 NATURAL	18
10582	HBS4-08 NATURAL	18
10583	HBS4-10 NATURAL	18
10584	HBS4-12 NATURAL	18
10585	HBS4-14 NATURAL	18
10587	HBS5-03 NATURAL	19
10588	HBS5-04 NATURAL	19
10589	HBS5-06 NATURAL	19
10590	HBS5-07 NATURAL	19
10591	HBS5-08 NATURAL	19
10592	HBS5-10 NATURAL	19
10593	HBS5-12 NATURAL	19
10594	HBS5-14 NATURAL	19
10596	HBS6-04 NATURAL	19
10597	HBS6-06 NATURAL	19
10598	HBS6-08 NATURAL	19
10599	HBS6-10 NATURAL	19
10600	HBS6-12 NATURAL	19
10601	HBS6-14 NATURAL	19
10603	HRLSP-06 NATURAL	19
10604	HRLSP-07 NATURAL	19
10605	HRLSP-08 NATURAL	19
10606	HRLSP-10 NATURAL	19
10607	HRLSP-12 NATURAL	19
10608	HRLSP-14 NATURAL	19
10609	HRLSP-16 NATURAL	19
10611	HKSLBN-02 NATURAL	19
10612	HKSLBN-04 NATURAL	19
10613	HKSLBN-06 NATURAL	19
10614	HKSLBN-08 NATURAL	19
10616	HHCBS-04 NATURAL	22
10617	HHCBS-06 NATURAL	22
10618	HHCBS-08 NATURAL	22
10619	HHCBS-10 NATURAL	22
10620	HHCBS-12 NATURAL	22
10621	HHCBS-14 NATURAL	22
10622	HHCBS-16 NATURAL	22
10623	HHCBS-18 NATURAL	22
10624	HHCBS-20 NATURAL	22
10625	HHCBS-22.5 NATURAL	22
10627	HSRS4-02 NATURAL	21
10628	HSRS4-03 NATURAL	21
10629	HSRS4-04 NATURAL	21
10630	HSRS4-05 NATURAL	21
10631	HSRS4-06 NATURAL	21
10632	HSRS4-07 NATURAL	21
10633	HSRS4-08 NATURAL	21
10634	HSRS4-10 NATURAL	21
10635	HSRS4-12 NATURAL	21
10636	HSRS4-14 NATURAL	21
10637	HSRS4-16 NATURAL	21
10639	HSRS6-04 NATURAL	21
10640	HSRS6-05 NATURAL	21
10641	HSRS6-06 NATURAL	21
10642	HSRS6-07 NATURAL	21
10643	HSRS6-08 NATURAL	21
10644	HSRS6-10 NATURAL	21
10645	HSRS6-12 NATURAL	21
10646	HSRS6-14 NATURAL	21
10647	HSRS6-16 NATURAL	21
10649	HSRS8-04 NATURAL	21
10650	HSRS8-05 NATURAL	21
10651	HSRS8-06 NATURAL	21
10652	HSRS8-07 NATURAL	21
10653	HSRS8-08 NATURAL	21
10654	HSRS8-10 NATURAL	21
10655	HSRS8-12 NATURAL	21
10656	HSRS8-14 NATURAL	21
10657	HSRS8-16 NATURAL	21
10659	HTCBS-M3-6-8 BLACK	22
10660	HTCBS-M3-6-10 BLACK	22
10661	HTCBS-M3-6-15 BLACK	22
10662	HTCBS-M3-6-20 BLACK	22
10664	HTCBS-M3-8-8 BLACK	22
10665	HTCBS-M3-8-23 BLACK	22
10667	HTCBS-M4-8-10 BLACK	22
10668	HTCBS-M4-8-12 BLACK	22
10669	HTCBS-M4-8-15 BLACK	22
10670	HTCBS-M4-8-30-16 BLACK	22
10671	HTCBS-M4-8-30-17 BLACK	22
10672	HTCBS-M4-8-30-21 BLACK	22
10673	HTCBS-M4-8-35 BLACK	22
10674	HTCBS-M4-8-70 BLACK	22
10676	HPL-1 NATURAL	71
10678	HSCBS-04 NATURAL	24
10679	HSCBS-06 NATURAL	24
10680	HSCBS-08 NATURAL	24
10681	HSCBS-10 NATURAL	24
10682	HSCBS-12 NATURAL	24
10683	HSCBS-13 NATURAL	24
10684	HSCBS-14 NATURAL	24
10685	HSCBS-16 NATURAL	24
10686	HSCBS-18 NATURAL	24
10687	HSCBS-22.5 NATURAL	24
10689	HSCBS1-632-02 NATURAL	25
10690	HSCBS1-632-03 NATURAL	25
10691	HSCBS1-632-04 NATURAL	25
10692	HSCBS1-632-06 NATURAL	25
10693	HSCBS1-632-08 NATURAL	25
10694	HSCBS1-632-10 NATURAL	25
10695	HSCBS1-632-12 NATURAL	25
10696	HSCBS1-632-14 NATURAL	25
10698	HSCBS1-M3-02 NATURAL	25
10699	HSCBS1-M3-03 NATURAL	25
10700	HSCBS1-M3-04 NATURAL	25
10701	HSCBS1-M3-06 NATURAL	25
10702	HSCBS1-M3-08 NATURAL	25
10703	HSCBS1-M3-10 NATURAL	25
10704	HSCBS1-M3-12 NATURAL	25
10705	HSCBS1-M3-14 NATURAL	25
10707	HSCBS1-M4-02 NATURAL	25
10708	HSCBS1-M4-03 NATURAL	25
10709	HSCBS1-M4-04 NATURAL	25
10710	HSCBS1-M4-06 NATURAL	25
10711	HSCBS1-M4-08 NATURAL	25
10712	HSCBS1-M4-10 NATURAL	25
10713	HSCBS1-M4-12 NATURAL	25
10714	HSCBS1-M4-14 NATURAL	25
10726	HSCBS4-02 NATURAL	23
10727	HSCBS4-03 NATURAL	23
10728	HSCBS4-04 NATURAL	23
10729	HSCBS4-05 NATURAL	23
10730	HSCBS4-06 NATURAL	23
10731	HSCBS4-07 NATURAL	23
10732	HSCBS4-08 NATURAL	23
10733	HSCBS4-09 NATURAL	23
10734	HSCBS4-10 NATURAL	23
10736	HSCBS5-02 NATURAL	23
10737	HSCBS5-03 NATURAL	23
10738	HSCBS5-04 NATURAL	23
10739	HSCBS5-05 NATURAL	23
10740	HSCBS5-06 NATURAL	23
10741	HSCBS5-07 NATURAL	23
10742	HSCBS5-08 NATURAL	23
10743	HSCBS5-09 NATURAL	23
10744	HSCBS5-10 NATURAL	23
10746	HSCBS6-04 NATURAL	24
10747	HSCBS6-06 NATURAL	24
10748	HSCBS6-08 NATURAL	24
10749	HSCBS6-10 NATURAL	24
10750	HSCBS6-12 NATURAL	24
10751	HSCBS6-14 NATURAL	24
10752	HSCBS6-16 NATURAL	24
10754	HSCBS7-04 NATURAL	24
10755	HSCBS7-06 NATURAL	24
10756	HSCBS7-08 NATURAL	24
10757	HSCBS7-10 NATURAL	24
10758	HSCBS7-12 NATURAL	24
10759	HSCBS7-14 NATURAL	24
10760	HSCBS7-16 NATURAL	24
10762	HSCBS8-04 NATURAL	24
10763	HSCBS8-06 NATURAL	24
10764	HSCBS8-08 NATURAL	24
10765	HSCBS8-10 NATURAL	24
10766	HSCBS8-12 NATURAL	24
10767	HSCBS8-14 NATURAL	24
10768	HSCBS8-16 NATURAL	24
10769	HSCBS8-18 NATURAL	24
10770	HSCBS8-22.5 NATURAL	24
10772	HCBS-03-AB NATURAL	26
10773	HCBS-04-AB NATURAL	26
10774	HCBS-06-AB NATURAL	26
10775	HCBS-08-AB NATURAL	26
10776	HCBS-10-AB NATURAL	26
10777	HCBS-12-AB NATURAL	26
10778	HCBS-14-AB NATURAL	26
10779	HCBS-16-AB NATURAL	26
10780	HCBS-18-AB NATURAL	26
10781	HCBS-08M-AB NATURAL	27
10782	HCBS-10M-AB NATURAL	27
10784	HCBS2-03-AB NATURAL	26
10785	HCBS2-04-AB NATURAL	26

PART NUMBER INDEX

Part #	Description	Page
10786	HCBS2-06-AB NATURAL	26
10787	HCBS2-08-AB NATURAL	26
10788	HCBS2-10-AB NATURAL	26
10789	HCBS2-12-AB NATURAL	26
10790	HCBS2-14-AB NATURAL	26
10791	HCBS2-16-AB NATURAL	26
10792	HCBS2-18-AB NATURAL	26
10794	HCBS3-03-AB NATURAL	26
10795	HCBS3-04-AB NATURAL	26
10796	HCBS3-05-AB NATURAL	26
10797	HCBS3-06-AB NATURAL	26
10798	HCBSC-07-AB NATURAL	26
10799	HCBS3-08-AB NATURAL	26
10800	HCBS3-09-AB NATURAL	26
10801	HCBS3-10-AB NATURAL	26
10803	HCBS4-03-AB NATURAL	26
10804	HCBS4-04-AB NATURAL	26
10805	HCBS4-06-AB NATURAL	26
10806	HCBS4-07-AB NATURAL	26
10807	HCBS4-08-AB NATURAL	26
10808	HCBS4-10-AB NATURAL	26
10810F	HPSB-06M-AB NATURAL V-0	27
10811F	HPSB-08M-AB NATURAL V-0	27
10812F	HPSB-10M-AB NATURAL V-0	27
10813F	HPSB-12M-AB NATURAL V-0	27
10814F	HPSB-14M-AB NATURAL V-0	27
10815F	HPSB-16M-AB NATURAL V-0	27
10817	HCBS-TMM-04 NATURAL	25
10818	HCBS-TMM-06 NATURAL	25
10819	HCBS-TMM-08 NATURAL	25
10820	HCBS-TMM-10 NATURAL	25
10821	HCBS-TMM-12 NATURAL	25
10822	HCBS-TMM-14 NATURAL	25
10823	HCBS-TMM-16 NATURAL	25
10829	HLCBS-TF-M4-06 NATURAL	22
10830	HLCBS-TF-M4-08 NATURAL	22
10831	HLCBS-TF-M4-10 NATURAL	22
10832	HLCBS-TF-M4-12 NATURAL	22
10833	HLCBS-TF-M4-14 NATURAL	22
10834	HLCBS-TF-M4-16 NATURAL	22
10836	HCDLCBST-03 NATURAL	9
10837	HCDLCBST-04 NATURAL	9
10838	HCDLCBST-05 NATURAL	9
10839	HCDLCBST-06 NATURAL	9
10840	HCDLCBST-07 NATURAL	9
10841	HCDLCBST-08 NATURAL	9
10842	HCDLCBST-09 NATURAL	9
10843	HCDLCBST-10 NATURAL	9
10845	HCPS-05 NATURAL	16
10846	HCPS-06 NATURAL	16
10847	HCPS-08 NATURAL	16
10848	HCPS-10 NATURAL	16
10849	HCPS-12 NATURAL	16
10850	HCPS-14 NATURAL	16
10851	HCPS-16 NATURAL	16
10852	HCPS-18 NATURAL	16
10853	HCPS-20 NATURAL	16
10854	HCPS-22 NATURAL	16
10855	HCPS-24 NATURAL	16
10857	HSSRS8-04 NATURAL	20
10858	HSSRS8-05 NATURAL	20
10859	HSSRS8-06 NATURAL	20
10860	HSSRS8-07 NATURAL	20
10861	HSSRS8-08 NATURAL	20
10862	HSSRS8-10 NATURAL	20
10863	HSSRS8-12 NATURAL	20
10864	HSSRS8-14 NATURAL	20
10865	HSSRS8-16 NATURAL	20
10935	HTEHCBS-04 NATURAL	27
10936	HTEHCBS-05 NATURAL	27
10937	HTEHCBS-06 NATURAL	27
10939	HTEHCBS-08 NATURAL	27
10941	HTEHCBS-10 NATURAL	27
10942	HTEHCBS-12 NATURAL	27
10943	HTEHCBS-14 NATURAL	27
10944	HTEHCBS-16 NATURAL	27
10999	PCB SUPPORTS & LED SPACERS LABKIT #10	79
11000	HLEDM-1-03M BLACK PVC	28
11001	HLEDM-1-25M BLACK PVC	28
11002F	HLEDM-2-02M BLACK V-0	28
11003F	HLEDM-2-03M BLACK V-0	28
11004F	HLEDM-2-05M BLACK V-0	28
11005F	HLEDM-2-06M BLACK V-0	28
11006F	HLEDM-2-07M BLACK V-0	28
11007F	HLEDM-2-12M BLACK V-0	28
11008F	HLEDM-2-13M BLACK V-0	28
11009F	HLEDM-2-17M BLACK V-0	28
11010F	HLEDM-2-10M BLACK V-0	28
11019	HLEDS2-04 BLACK PVC	29
11020	HLEDS2-06 BLACK PVC	29
11021	HLEDS2-08 BLACK PVC	29
11022	HLEDS2-10 BLACK PVC	29
11023	HLEDS2-12 BLACK PVC	29
11029	HLEDS3-10 BLACK PVC	29
11030	HLEDS3-12 BLACK PVC	29
12025	CHSR R-11 NATURAL	46
12026	CHSR R-16 NATURAL	46
12027	CHSR R-25 NATURAL	46
12028	CHSR R-33 NATURAL	46
12040	SLP1-177 NATURAL	71
12041	SLP1-221 NATURAL	71
12042	SLP1-236 NATURAL	71
12043	SLP1-245 NATURAL	71
12044	SLP1-307 NATURAL	71
12045	SLP1-316 NATURAL	71
12046	SLP1-330 NATURAL	71
12047	SLP1-413 NATURAL	71
12048	SLP1-638 NATURAL	71
12049	SLP1-660 NATURAL	71
12050	SLP1-701 NATURAL	71
12067	VCSC 087-18	35
12068	VCSC 110-12	35
12069	VCSC 134-12	35
12070	VCSC 137-14	35
12071	VCSC 157-14	35
12072	VCSC 177-17	35
12073	VCSC 189-12	35
12074	VCSC 213-13	35
12075	VCSC 213-18	35
12076	VCSC 252-17	35
12077	VCSC 260-13	35
12078	VCSC 299-18	35
12079	VCSC 299-28	35
12080	VCSC 331-18	35
12081	VCSC 496-18	35
12082	VCSC 71-08A	35
12083	VCSC 98-14A	35
12084	VCSC 157-16A	35
12085	WL 125 NATURAL	41
12086	WL 200 NATURAL	41
12087	WL 250 NATURAL	41
12088	WL 350 NATURAL	41
12094	WLS 550-90 NATURAL	41
12096	WL 350A NATURAL	41
12097	WL 450A NATURAL	41
12098	WL 750A NATURAL	41
12475	MTR 180-125 BLACK	67
12477	MTR 290-150 BLACK	67
12480	RR 0297-41 NATURAL	66
12481	RR 0500-41 NATURAL	66
12482	RR 0813-41 NATURAL	66
12483	RR 1375-41 NATURAL	66
12484	RR 0298-75 NATURAL	66
12485	RR 0500-75 NATURAL	66
12486	RR 0812-75 NATURAL	66
12487	RR 1375-75 NATURAL	66
12801B	NTSS-0150-46A BLACK	57
12802B	NTSS-0200-46A BLACK	57
12803B	NTSS-0250-46A BLACK	57
12805B	NTSS-0300-46A BLACK	57
12806B	NTSS-0350-46A BLACK	57
12808B	NTSS-0400-46A BLACK	57
12810B	NTSS-0500-46A BLACK	57
12812B	NTSS-0600-46A BLACK	57
12814B	NTSS-0800-46A BLACK	57
12821B	NTSS-0200-79A BLACK	57
12822B	NTSS-0250-79A BLACK	57
12824B	NTSS-0300-79A BLACK	57
12825B	NTSS-0350-79A BLACK	57
12827B	NTSS-0400-79A BLACK	57
12829B	NTSS-0500-79A BLACK	57
12831B	NTSS-0600-79A BLACK	57
12833B	NTSS-0700-79A BLACK	57
12834B	NTSS-0800-79A BLACK	57
12836B	NTSS-1000-79A BLACK	57
13000B	NTMP-018-039 BLACK	56
13001B	NTMP-036-059 BLACK	56
13002B	NTMP-036-079 BLACK	56
13003B	NTMP-045-098 BLACK	56
13004B	NTMP-045-110 BLACK	56
13008B	NTMP-056-079 BLACK	56
13009B	NTMP-056-094 BLACK	56
13010B	NTMP-056-118 BLACK	56
13011B	NTMP-112-118 BLACK	56
13012B	NTMP-112-138 BLACK	56
13013B	NTMP-112-157 BLACK	56
13014B	NTMP-124-177 BLACK	56
13015B	NTMP-124-197 BLACK	56
13050B	CCSA 1/8 BLACK	34
13051B	CCSA 3/16 BLACK	34
13052B	CCSA 1/4 BLACK	34
13053B	CCSA 5/16 BLACK	34
13054B	CCSA 3/8 BLACK	34
13056B	CCSA 1/2 BLACK	34
13058B	CCSA 5/8 BLACK	34
13060B	CCSA 3/4 BLACK	34
13062B	CCSA 1 BLACK	34
13100B	NT-18-031 UV BLACK	54
13102B	NT-18-040 UV BLACK	54
13105B	NT-18-047 UV BLACK	54
13107B	NT-18-059 UV BLACK	54
13108B	NT-18-060 UV BLACK	54
13111B	NT-18-080 UV BLACK	54
13120B	NT-40-040 UV BLACK	54
13121B	NT-40-047 UV BLACK	54
13122B	NT-40-055 UV BLACK	54
13123B	NT-40-059 UV BLACK	54
13124B	NT-40-070 UV BLACK	54
13126B	NT-40-080 UV BLACK	54
13128B	NT-40-098 UV BLACK	54
13129B	NT-40-110 UV BLACK	54
13130B	NT-40-118 UV BLACK	54
13134B	NT-40-145 UV BLACK	54
13140B	NT-50-047 UV BLACK	54
13142B	NT-50-063 UV BLACK	54
13143B	NT-50-070 UV BLACK	54
13144B	NT-50-075 UV BLACK	54
13145B	NT-50-078 UV BLACK	54
13147B	NT-50-098 UV BLACK	54
13149B	NT-50-110 UV BLACK	54
13151B	NT-50-118 UV BLACK	54
13153B	NT-50-137 UV BLACK	54
13155B	NT-50-145 UV BLACK	54
13156B	NT-50-157 UV BLACK	54
13158B	NT-50-177 UV BLACK	54
13160B	NT-50-196 UV BLACK	54
1634A	HF5 1/8 BLACK	61
1635A	HF5 1/4 BLACK	61
1636A	HF5 11/32 BLACK	61
1637A	HF5 3/8 BLACK	61
1638A	HF5 7/16 BLACK	61
1639A	HF5 1/2 BLACK	61
1641A	HF5 5/8 BLACK	61
1642A	HF5 3/4 BLACK	61
1643A	HF5 1 BLACK	61
1644A	HF5 1-1/16 BLACK	61
1646A	HF5 1-1/4 BLACK	61
1649A	HF5 1-1/2 BLACK	61
3600B	CH R-12 BLACK	48
3601B	CH R-13-3 BLACK	48
3602B	CH L-13-3 BLACK	48
3605B	CH R-18 BLACK	48
3606B	CHR-18-3 BLACK	48
3607B	CH L-18-3 BLACK	48
3610B	CH R-27 BLACK	48
3611B	CH R-27-3 BLACK	48
3612B	CH L-27-3 BLACK	48
3615B	CH R-35 BLACK	48
3616B	CH R-35-3 BLACK	48
3617B	CH L-35-3 BLACK	48

PART NUMBER INDEX

Part #	Description	Page
3620B	CH L-12 BLACK	48
3625B	CH L-18 BLACK	48
3630B	CH L-27 BLACK	48
3635B	CH L-35 BLACK	48
3652B	CH R-27-90 BLACK	48
3663B	CHCS-4 BLACK	50
3666B	CHCS-10 BLACK	50
3667B	CH R-35-90 BLACK	48
3668B	CHCS-16 BLACK	50
3681	HSSRS4-02 FR NATURAL	20
3683	HSSRS4-03 FR NATURAL	20
3684	HSSRS4-04 FR NATURAL	20
3685	HSSRS4-06 FR NATURAL	20
3687	HSSRS4-08 FR NATURAL	20
3688	HSSRS4-10 FR NATURAL	20
3689	HSSRS6-04 FR NATURAL	20
3690	HSSRS6-06 FR NATURAL	20
3691	HSSRS6-08 FR NATURAL	20
3692	HSSRS6-10 FR NATURAL	20
3697B	CH L -27-90 BLACK	48
3712B	CH L -35-90 BLACK	48
3918A	WCA 250-750 SUPER BLACK	45
3919A	WCA 375-1000 SUPER BLACK	45
3920A	WCA 500-1250 SUPER BLACK	45
4199B	HMB 125-06 BLACK	68
4200B	HMB 136-06 BLACK	68
4201B	HMB 187-06 BLACK	68
4222F	CHRS 58-1 94V-0	47
4223F	CHRS 112-1 94V-0	47
4224F	CHRS 58-2 94V-0	47
4225F	CHRS 112-2 94V-0	47
4226F	CHRS 73-1 94V-0	47
4227F	CHRS 91-1 94V-0	47
4228F	CHRS 112-1 94V-0	47
4229F	CHRS 130-1 94V-0	47
4230F	CHRS 73-2 94V-0	47
4231F	CHRS 91-2 94V-0	47
4232F	CHRS 112-2 94V-0	47
4233F	CHRS 130-2 94V-0	47
4234F	CHRS 73-1-2 94V-0	47
4235F	CHRS 91-1-2 94V-0	47
4236F	CHRS 112-1-2 94V-0	47
4237F	CHRS 130-1-2 94V-0	47
4238F	CHRS 73-2-2 94V-0	47
4239F	CHRS 91-2-2 94V-0	47
4262F	CHRS 112-2-2 94V-0	47
4263F	CHRS 130-2-2 94V-0	47
9020F	PR 102-039 UV BLACK	62
9022F	PR 102-082 UV BLACK	62
9024F	PR 102-106 UV BLACK	62
9026F	PR 102-134 UV BLACK	62
9028F	PR 122-039 UV BLACK	62
9028H	PR 122-039 HR TAN	63
9030F	PR 122-079 UV BLACK	62
9030H	PR 122-079 HR TAN	63
9032F	PR 122-118 UV BLACK	62
9032H	PR 122-118 HR TAN	63
9034F	PR 122-157 UV BLACK	62
9034H	PR 122-157 HR TAN	63
9036F	PR 122-197 UV BLACK	62
9038F	PR 122-217 UV BLACK	62
9038H	PR 122-217 HR TAN	63
9040F	PR 122-256 UV BLACK	62
9042F	PR 122-295 BLACK	62
9044F	PR 142-047 UV BLACK	62
9044H	PR 142-047 HR TAN	63
9046F	PR 142-083 UV BLACK	62
9046H	PR 142-083 HR TAN	63
9048F	PR 142-106 UV BLACK	62
9048H	PR 142-106 HR TAN	63
9050F	PR 142-118 HR TAN	62
9050H	PR 142-118 UV BLACK	63
9052F	PR 142-146 UV BLACK	62
9054F	PR 142-177 UV BLACK	62
9056F	PR 142-217 UV BLACK	62
9058F	PR 161-098 UV BLACK	62
9058H	PR 161-098 HR TAN	63
9060F	PR 161-138 UV BLACK	62
9060H	PR 161-138 HR TAN	63
9062F	PR 161-177 V-0 BLACK	19, 31, 62
9062H	PR 161-177 HR TAN	63
9064F	PR 161-217 V-0 BLACK	19, 31, 62
9064H	PR 161-217 HR TAN	63
9066F	PR 161-256 V-0 BLACK	19, 31, 62
9068F	PR 161-295 V-0 BLACK	19, 31, 62
9068H	PR 161-295 HR TAN	63
9070F	PR 201-059 UV BLACK	63
9072F	PR 201-098 UV BLACK	63
9074F	PR 201-138 UV BLACK	63
9076F	PR 201-177 V-0 BLACK	19, 31, 63
9078F	PR 201-217 V-0 BLACK	19, 31, 63
9080F	PR 201-256 V-0 BLACK	19, 31, 63
9082F	PR 201-295 V-0 BLACK	19, 31, 63
9084F	PR 240-098 UV BLACK	63
9118F	PRH 102-217 V-0 BLACK	64
9156F	PRH 122-039 V-0 BLACK	64
9158F	PRH 122-079 V-0 BLACK	64
9160F	PRH 122-118 V-0 BLACK	64
9162F	PRH 122-157 UV BLACK	64
9164F	PRH 122-197 UV BLACK	64
9166F	PRH 122-217 UV BLACK	64
9168F	PRH 122-256 UV BLACK	64
9170F	PRH 122-295 UV BLACK	64
9172F	PRH 142-039 UV BLACK	64
9174F	PRH 142-079 UV BLACK	64
9176F	PRH 142-118 UV BLACK	64
9178F	PRH 142-138 UV BLACK	64
9180F	PRH 142-177 UV BLACK	64
9296F	PR 083-024 V-0 BLACK	62
9300F	PR 083-051 UV BLACK	62
9302F	PR 083-083 V-0 BLACK	62
9304F	PR 083-114 UV BLACK	62
9306F	PR 083-146 UV BLACK	62
9308F	PR 083-173 UV BLACK	62
9310F	PR 102-169 UV BLACK	62
9312F	PR 102-201 UV BLACK	62
9314F	PR 122-453 UV BLACK	62
9316F	PR 122-807 UV BLACK	62
9318F	PR 161-354 V-0 BLACK	19, 31, 62
9320F	PR 161-492 V-0 BLACK	19, 31, 62
9322F	PR 232-118 UV BLACK	63
9324F	PR 240-138 UV BLACK	63
C2008	LTBP 500 -063 BLACK	78
C2012	LTBP 625-063 BLACK	78
C2016	LTBP 750-063 BLACK	78
C2020	LTBP 875-063 BLACK	78
C2022	LTBP 1000-063 BLACK	78
C2024	LTBP 1093-063 BLACK	78
C2058	LTBP 500 -250 BLACK	78
C2062	LTBP 625-250 BLACK	78
C2066	LTBP 750-250 BLACK	78
C2070	LTBP 875-250 BLACK	78
C2072	LTBP 1000-250 BLACK	78
C2074	LTBP 1093-250 BLACK	78
G2000	RGB 118-236-4 BLACK	72
G2003	RGB 148-310-1 BLACK	73
G2004	RGB 156-375-3 BLACK	73
G2005	RGB 179-310-3 BLACK	73
G2006	RGB 177-334-9 BLACK	72
G2007	RGB 180-500-2 BLACK	73
G2009	RGB 187-250-6 BLACK	72
G2010	RGB 187-312-4 BLACK	73
G2011	RGB 187-375-8 BLACK	73
G2012	RGB 187-375-4 BLACK	73
G2013	RGB 187-500-3 BLACK	73
G2014	RGB 187-338-6 BLACK	73
G2015	RGB 238-620-6 BLACK	73
G2016	RGB 218-406-6 BLACK	72
G2017	RGB 218-875-6 BLACK	72
G2019	RGB 250-437-6 BLACK	73
G2020	RGB 250-500-6 BLACK	72
G2021	RGB 250-562-12 BLACK	73
G2022	RGB 250-375-4 BLACK	73
G2023	RGB 250-375-4R BLACK	73
G2024	RGB 250-500-5 BLACK	73
G2025	RGB 250-500-8 BLACK	73
G2026	RGB 250-406-7 BLACK	73
G2027	RGB 250-562-4 BLACK	73
G2028	RGB 278-620-6 BLACK	73
G2029	RGB 281-500-2 BLACK	73
G2030	RGB 281-500-4 BLACK	73
G2031	RGB 281-562-4 BLACK	73
G2032	RGB 281-625-11 BLACK	73
G2034	RGB 312-1250-3 BLACK	73
G2035	RGB 312-375-5 BLACK	72
G2036	RGB 312-875-4 BLACK	73
G2037	RGB 312-625-8 BLACK	73
G2038	RBG 376-500-15 BLACK	73
G2039	RGB 328-846-6 BLACK	72
G2043	RGB 500-1000-6 BLACK	72
G2044	RGB 500-1000-10 BLACK	73
G2201	PBRS 500-8-4-W BLACK	74
G2205	PBRS 625-12-4-W BLACK	74
G2209	PBRS 750-12-5-W BLACK	74
G2213	PBRS 812-23-7-W BLACK	74
G2217	PBRS 1000-26-4-W BLACK	74
G2220	PBRS 1000-32-5 BLACK	74
G2221	PBRS 1000-32-5-W BLACK	74
G2225	PBRS 1093-20-6-W BLACK	74
G2229	PBRR 500-8-3-W BLACK	74
G2233	PBRR 750-18-6-W BLACK	74
G2237	PBRR 750-24-4-W BLACK	74
G2241	PBRR 812-26-8-W BLACK	74
G2244	PBRR 937-12-6 BLACK	74
G2245	PBRR 937-12-6-W BLACK	74
G2249	PBRR 969-11-6-W BLACK	74
G2253	PBRR 1000-14-6-W BLACK	74
G2257	PBRR 1000-16-7-W BLACK	74
G2261	PBRR 1000-18-9-W BLACK	74
G2267	PBRR 1250-40-8-W BLACK	74
G2271	PBRR 1250-60-8-W BLACK	74
G2275	PBRR 1500-20-6-W BLACK	74
G2278	PBRR 1500-20-10 BLACK	74
G2279	PBRR 1500-20-10-W BLACK	74
G2283	PBRR 1500-24-8-W BLACK	74
G2286	PBRR 1700-36-12 BLACK	74
G2290	PBRR 1750-56-12 BLACK	74
G2294	PBRR 2.5-32-12 BLACK	74
G2296	PBRR 2.5-32-12W6 BLACK	74
G2298	PBRR 2.5-32-12W7 BLACK	74
G2302	PBRR 2.5-64-12 BLACK	74
G2307	PBS 1000-16-6-W BLACK	74
G2311	PBS 1500-24-8-W	74
G2312	RGBA 19-39-50 BLACK	76
G2313	RGBA 20-47-40 BLACK	76
G2314	RGBA 20-47-50 BLACK	76
G3016	FSSI 19-31-06 BLACK	78
G3017	FSSI 25-31-06 BLACK	78
G3018	FSSI 38-31-06 BLACK	78
G3116	RGB 203-812-6 BLACK	72
G3117	RGB 203-812-8 BLACK	72
G3118	RGB 203-812-12 BLACK	72
N001	CBA 500-14 CLEAR	75
N002	HBA 440-20 CLEAR	75
N005	CBA 500-06 CLEAR	75
N006	CBA 500-25 CLEAR	75
N007	HBA 335-09 CLEAR	75
N008	HBA 700-38 CLEAR	75
N009	TBA 5050-12 CLEAR	75
N011	CBA 650-40 CLEAR	75
N012	HBA 375-15 CLEAR	75
N015	HBA 620-31 CLEAR	75
N017	CDBA 880-40 CLEAR	75
N018	CDBA 500-14 CLEAR	75
N019	TBA 8181-30 CLEAR	75
N024	CBA 810-12 CLEAR	75
N027	HBA 312-09 CLEAR	75
N030	CDBA 1810-60 CLEAR	75
N035	CBA 370-19 CLEAR	75
N040	HBA 250-06 CLEAR	75
N041	CBA 780-20 CLEAR	75
N101	CBA 500-14 BLACK	75
N102	HBA 440-20 BLACK	75
N105	CBA 500-06 BLACK	75
N106	CBA 500-25 BLACK	75
N107	HBA 335-09 BLACK	75
N108	HBA 700-38 BLACK	75
N109	TBA 5050-12 BLACK	75
N111	CBA 650-40 BLACK	75
N112	HBA 375-15 BLACK	75

PART NUMBER INDEX

Part #	Description	Page
N115	HBA 620-31 BLACK	75
N117	CDBA 880-40 BLACK	75
N118	CDBA 500-14 BLACK	75
N119	TBA 8181-30 BLACK	75
N124	CBA 810-12 BLACK	75
N127	HBA 312-09 BLACK	75
N130	CDBA 1810-60 BLACK	75
N135	CBA 370-19 BLACK	75
N140	HBA 250-06 BLACK	75
N141	CBA 780-20 BLACK	75
S3324	CC H 1/4 SS COATED	35
S3326	CC H 3/8 SS COATED	35
S3328	CC H 1/2 SS COATED	35
S3330	CC H 5/8 SS COATED	35
S3332	CC H 3/4 SS COATED	35
S3334	CC H 7/8 SS COATED	35
S3374	CC H 1/4 SS	35
S3376	CC H 3/8 SS	35
S3378	CC H 1/2 SS	35
S3380	CC H 5/8 SS	35
S3382	CC H 3/4 SS	35
S3384	CC H 7/8 SS	35
S6400	SunRunner 4 100 pack	37
S6403	MaxRunner 12 Clip Mount	40
S6405	SunRunner 304 SS 100 pack	36
S6406	SunRunner 90° 100 pack	37
S6407	SunRunner EZ 100 pack	36
S6408	SUNBUNDLER 8 BULK	56
S6409	SUNBUNDLER 8 100 PACK	56
S6410	SunBundler 10 BULK	56
S6411	SUNBUNDLER 10 100 PACK	56
S6412	SunBundler 12 BULK	56
S6413	SUNBUNDLER 12 100 PACK	56
S6414	SunBundler 14 BULK	56
S6415	SUNBUNDLER 14 100 PACK	56
S6420	SunBundler 20 BULK	56
S6421	SUNBUNDLER 20 100 PACK	56
S6433	MaxRunner 12 Flush Mount	40
S6440	SunRunner 4 Bulk	37
S6445	SunRunner 304 SS Bulk	36
S6446	SunRunner 90° Bulk	37
S6447	SunRunner EZ Bulk	36
S6490	SunRunner 316 SS 100 Pack	36
S6495	SunRunner 316 SS Bulk	36

The Strain Reliever™ "Pill Bottle"

(PN 9977)

INDICATIONS:

For permanent **relief of strain** associated with not having the solution.

DIRECTIONS:

Remove top and shake out a potential solution. Take one dose each time "**no solution**" symptoms appear. Repeat as needed. This prescription may be refilled at any time because new solutions are constantly being generated.

WARNING:

If strain persists or gets worse, consult your Heyco representative immediately because this could be a sign of a serious problem in need of a Heyco solution!

Request one from your Heyco Distributor, Sales Representative, Business Development Manager, or Customer Service Representative–TODAY!

HEYCO FOR YOUR BUSINESS HEALTH







"Stay Connected with Heyco" Power Components

Phone: 732.286.1800 • Toll Free: 800.526.4182
Fax: 732.244.8843 • Toll Free Fax: 800.358.7904
www.heyco.com