

## DLM5221B THRU DLM5259B

### TECHNICAL SPECIFICATIONS OF GLASS SILICON ZENER DIODES

#### FEATURES


- \* Voltage Range: 2.4V to 39V
- \* Double slug type construction

#### MECHANICAL DATA

- \* Case: Glass sealed case Micro Melf
- \* Terminals: Solder plated, solderable per MIL-STD-750, Method 2026 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 0.05 grams Approx.



Micro Melf

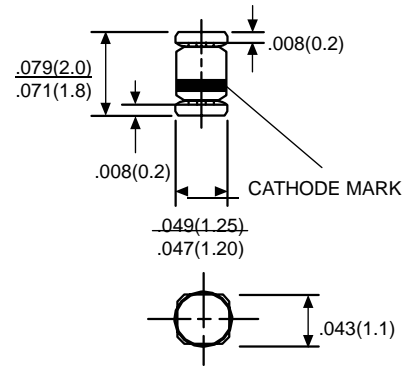

Dimensions in inches(millimeters)

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	SYMBOL	VALUE	UNITS
Zener Current see Table "Characterisitcs"			
Power Dissipation at Tamb=25°C	P <sub>tot</sub>	500 <sup>(1)</sup>	mW
Junction Temperature	T <sub>j</sub>	175	°C
Storage Temperature Range	T <sub>stg</sub>	-55 to + 175	°C
Thermal Resistance	R <sub>thA</sub>	-	K/mW
Junction to Ambient Air		-	Typ.
		0.3 <sup>(1)</sup>	Min. Max.
Forward Voltage at I <sub>F</sub> =100mA	V <sub>F</sub>	- - 1	Volts Typ. Min. Max.

1)Valid Provided that leads are kept at ambient temperature at a distance of 10 mm from case.

NOTE: Suffix "B" indicates Zener Voltage Tolerance ± 5%

# RATING AND CHARACTERISTIC CURVES (DLM5221B THRU DLM5259B)

TYPE	Nominal Zener Voltage $V_Z@I_{ZT}$	Zener Test Current $I_{ZT}$	Maximum Zener Impedance		$I_{ZK}$	Maximum Reverse Leakage Current		Typical Temperature Coefficient	Max. Zener Current $I_{ZM}@T_A$
	Volts	mA	$Z_{ZT}@I_{ZT}$	$Z_{ZT}@I_{ZK}$		$I_R @ V_R$			
			Ohms	Ohms	mA	$\mu A$	Volts	% / °C	mA
DLM5221B	2.4	20	30	1200	0.25	100	1.0	-0.070	188
DLM5222B	2.5	20	30	1250	0.25	100	1.0	-0.065	180
DLM5223B	2.7	20	30	1300	0.25	75	1.0	-0.060	167
DLM5225B	3.0	20	30	1600	0.25	50	1.0	-0.055	150
DLM5226B	3.3	20	28	1600	0.25	25	1.0	0.030	136
DLM5227B	3.6	20	24	1700	0.25	15	1.0	0.030	126
DLM5228B	3.9	20	23	1900	0.25	10	1.0	+0.038	115
DLM5229B	4.3	20	22	2000	0.25	5	1.0	+0.038	106
DLM5230B	4.7	20	19	1900	0.25	5	2.0	+0.045	97
DLM5231B	5.1	20	17	1600	0.25	5	2.0	+0.050	89
DLM5232B	5.6	20	11	1600	0.25	5	3.0	+0.058	81
DLM5233B	6.0	20	9	1600	0.25	5	3.5	+0.060	76
DLM5234B	6.2	20	7	1000	0.25	5	4.0	+0.062	73
DLM5235B	6.8	20	5	750	0.25	3	5.0	+0.065	67
DLM5236B	7.5	20	6	500	0.25	3	6.0	+0.068	61
DLM5237B	8.2	20	8	500	0.25	3	6.0	+0.075	55
DLM5238B	8.7	20	9	600	0.25	3	6.5	+0.075	52
DLM5239B	9.1	20	10	600	0.25	3	6.5	+0.076	50
DLM5240B	10	20	17	600	0.25	3	8.0	+0.077	45
DLM5241B	11	20	22	600	0.25	3	8.4	+0.079	41
DLM5242B	12	20	30	600	0.25	2	9.1	+0.082	38
DLM5243B	13	9.5	13	600	0.25	1	9.9	+0.082	35
DLM5244B	14	9.0	14	600	0.25	0.5	10	+0.082	32
DLM5245B	15	8.5	16	600	0.25	0.1	11	+0.083	30
DLM5246B	16	7.8	17	600	0.25	0.1	12	+0.084	28
DLM5247B	17	7.4	19	600	0.25	0.1	13	+0.084	27
DLM5248B	18	7.0	21	600	0.25	0.1	14	+0.085	25
DLM5249B	19	6.6	23	600	0.25	0.1	14	+0.085	24
DLM5250B	20	6.2	25	600	0.25	0.1	15	+0.086	23
DLM5251B	22	5.6	29	600	0.25	0.1	17	+0.086	21
DLM5252B	24	5.2	33	600	0.25	0.1	18	+0.087	19.1
DLM5253B	25	5.0	36	600	0.25	0.1	19	+0.087	18.2
DLM5254B	27	4.6	41	600	0.25	0.1	21	+0.087	16.8
DLM5255B	28	4.5	44	600	0.25	0.1	21	+0.089	16.2
DLM5256B	30	4.2	49	600	0.25	0.1	23	+0.090	15.1
DLM5257B	33	3.8	58	700	0.25	0.1	25	+0.091	13.8
DLM5258B	36	3.4	70	700	0.25	0.1	27	+0.091	12.6
DLM5259B	39	3.2	80	800	0.25	0.1	30	+0.092	11.6

NOTE: Standard Zener Voltage Tolerance  $\pm 5\%$

## Breakdown characteristics

DLM52 SERIES

changes in the power dissipation due to the ambient temperature.

