

Data Sheet

Customer: _____

Product: Metallized Polyester Film Capacitor (Axial Tubular Type) – MET series

Rated Voltage : 100V, 250V, 400V, 630V

Issued Date: 7-Jul.-2016

Edition: Ver. 1

Record of change

Date	Ver.	Description	Page
7-Jul.-2016	1		

HITANO ENTERPRISE CORP.

7F-7, No. 3, Wu Chuan 1st Road, New Taipei Industrial Park,

New Taipei City, TAIWAN, R.O.C.

Tel: +886 2 2299 1331 (Rep.)

Fax: +886 2 2298 2466, 2298 2969


Prepared by	Checked by	Approved by	Accepted by (customer)
7-Jul.-2016	7-Jul.-2016	7-Jul.-2016	
<i>Andy Hsu</i>	<i>Hwa Wu</i>	<i>Hwa Wu</i>	

Metallized Polyester Film Capacitor(Axial Lead)(Tubular)

MET are non-inductively wound with metallized polyester film as dielectric and electrode with copper-clad steel leads and epoxy end seal.

FEATURES:

- Low dissipation factor (D.F.)
- High insulation resistance.
- High stability of capacitance and dissipation factor versus temperature and frequency.
- Self-healing properties.

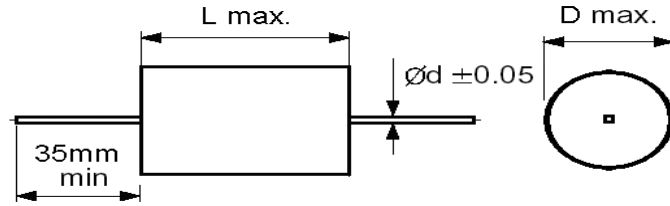

SPECIFICATIONS:

1. OPERATING TEMPERATURE: -55°C -- +125°C (Full rated voltage at 85°C . Derate linearly to 50% rated voltage at 125°C)
2. CAPACITANCE RANGE: 0.01µF – 100µF
3. CAPACITANCE TOLERANCE: ±5%(J), ±10%(K)
4. RATED VOLTAGE: 100VDC, 250VDC, 400VDC, 630VDC
5. DISSIPATION FACTOR: 0.75% max. at 1KHz, 20°C
6. INSULATION RESISTANCE: >15,000 MΩ(C≤0.33µF) . >5,000 MΩ µF/C (C>0.33µF).
7. VOLTAGE PROOF: 1.5 times rated voltage.

Unit : mm

RV SIZE CAP (µF)	100 VDC			250 VDC			400 VDC			630 VDC		
	D max.	L max.	dø ± 0.05	D max.	L max.	dø ± 0.05	D max.	L max.	dø ± 0.05	D max.	L Max.	dø ± 0.05
0.010	5.5	14.0	0.6	5.5	14.0	0.6	5.5	14.0	0.6	5.5	14.0	0.6
0.015	6.0	14.0	0.6	6.0	14.0	0.6	6.0	14.0	0.6	6.0	14.0	0.6
0.022	7.0	14.0	0.6	7.0	14.0	0.6	7.0	14.0	0.6	7.0	14.0	0.6
0.033	7.0	14.0	0.6	7.0	14.0	0.6	7.0	14.0	0.6	7.0	14.0	0.6
0.047	7.0	14.0	0.6	7.0	14.0	0.6	7.0	14.0	0.6	7.0	14.0	0.6
0.068	7.0	14.0	0.6	7.0	14.0	0.6	7.0	14.0	0.6	6.0	19.0	0.6
0.10	7.0	14.0	0.6	7.0	14.0	0.6	7.0	14.0	0.6	6.5	19.0	0.6
0.22	7.0	14.0	0.6	6.5	19.0	0.6	7.5	19.0	0.6	9.5	19.0	0.6
0.33	7.5	14.0	0.6	7.5	19.0	0.6	9.0	19.0	0.6	9.5	25.0	0.6
0.47	7.0	19.0	0.6	8.5	19.0	0.6	10.0	19.0	0.6	11.0	25.0	0.6
0.68	8.0	19.0	0.6	8.0	25.0	0.6	12.0	19.0	0.6	13.0	25.0	0.6
1.0	9.0	19.0	0.6	10.0	25.0	0.6	12.0	25.0	0.6	13.0	31.0	0.6
2.2	11.0	25.0	0.8	12.0	31.0	0.8	14.0	31.0	0.8	19.0	31.0	0.8
3.3	13.0	25.0	0.8	14.0	31.0	0.8	17.0	31.0	0.8	18.0	46.0	0.8
4.7	15.0	25.0	0.8	16.5	31.0	0.8	20.0	31.0	0.8	21.0	46.0	0.8
5.6	14.0	31.0	0.8	17.5	31.0	0.8	21.0	31.0	0.8	23.0	46.0	0.8
6.8	15.0	31.0	0.8	19.0	31.0	0.8	23.0	31.0	0.8	25.0	46.0	0.8
8.2	16.5	31.0	0.8	21.0	31.0	0.8	20.0	46.0	0.8	27.0	46.0	0.8
10.0	18.0	31.0	0.8	18.0	46.0	0.8	22.0	46.0	0.8	31.0	46.0	0.8
15.0	18.0	46.0	1.0	21.0	46.0	0.8	27.0	46.0	1.0			
22.0	21.0	46.0	1.0	25.0	46.0	1.0	32.0	46.0	1.0			
33.0	25.0	46.0	1.0	30.0	56.0	1.0						
47.0	27.0	56.0	1.0	35.0	56.0	1.0						
68.0	32.0	56.0	1.0	41.0	56.0	1.0						
82.0	35.0	56.0	1.0	35.0	56.0	1.0						
100.0	40.0	56.0	1.0	40.0	56.0	1.0						