



CLOSED LOOP HALL EFFECT CURRENT SENSOR JPC-2000X

For the electronic measurement of currents :
AC/DC current sensor, JPC series has good stability in high currents and a highly insulated primary and secondary.



ADVANTAGES

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

APPLICATIONS

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

FEATURES

- Closed loop (compensated) current transducer using the Hall effect
- Insulated plastic case recognized according to UL 94-V0
- Panel mounting





SPECIFICATION

Model		JPC-2000F	JPC-2000T		
Connector	-	39-28-8040[5566-04A-210] Molex	38-00-6293[6410-03C(102)] Molex		
Primary nominal current rms	A	2000			
Primary current, measuring range	A	0 .. ± 3000			
Measuring resistance @	Ω	± 15V	@ ± 2000A	Ta=70°C : 0 ~ 8	Ta=85°C : 0 ~ 7
			@ ± 2200A	Ta=70°C : 0 ~ 5	Ta=85°C : 0 ~ 4
		± 24V	@ ± 2000A	Ta=70°C : 5 ~ 29	Ta=85°C : 13 ~ 28
			@ ± 2800A	Ta=70°C : -----	Ta=85°C : 13 ~ 13
			@ ± 3000A	Ta=70°C : 5 ~ 11	Ta=85°C : -----
Secondary nominal current rms	mA	400			
Conversion ratio	-	1 : 5000			
Supply voltage (+ 5 %)	V	± 15 .. 24			
Current consumption (± 1mV)	mA	33(@ ±24V) + IS			
Overall accuracy	%	± 0.3			
Linearity error	%	< 0.1			
Offset current	mA	Max. ± 0.5			
Magnetic offset current	mA	Max. ± 0.2 (@ I _P = 0 and specified R _M , after an overload of 3 x I _{PN})			
Insulation voltage	V_D	AC 6000V / 1min.			
Temperature variation	mA	Typ. ± 0.2, Max. ± 0.5 (- 25°C .. + 85°C) / Max. ± 1.5 (- 40°C .. - 25°C)			
Reaction time to 90 % of I _{PN} step	μs	< 1 (With a di/dt of 100 A/μs.)			
di/dt accurately followed	A/μs	> 50			
Frequency bandwidth (- 1 dB)	kHz	DC .. 100			
Ambient Operating temperature	°C	- 40 .. + 85			
Ambient storage temperature	°C	- 50 .. + 90			
Secondary coil resistance	Ω	25 (@Ta=70°C) / 26 (@Ta=85°C)			
Mass	g	1500			
Standards	-	EN 50178: 1997 / IEC 61010-1			



DIMENSIONS(MM)

JPC-2000F

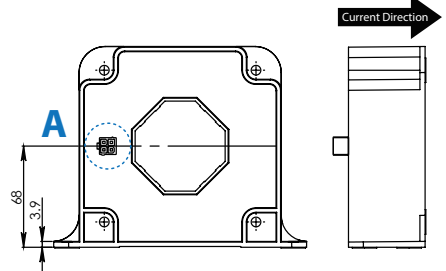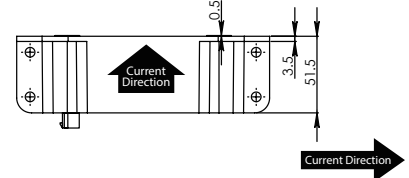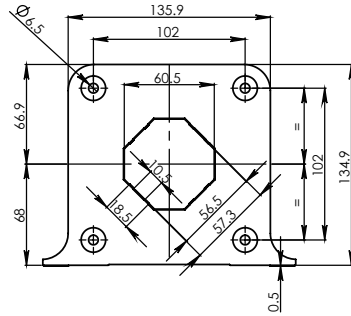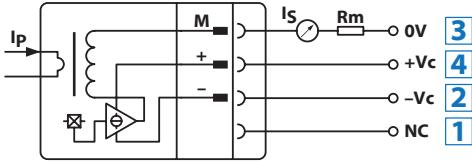

Connector





Manufacturer	Part Number	Old Part Number
Molex	39-28-8040	5566-04A-210

- Primary through-hole 60.5 x 20.5 mm or Ø max 57 mm

Detail A

Connector

JPC-2000T

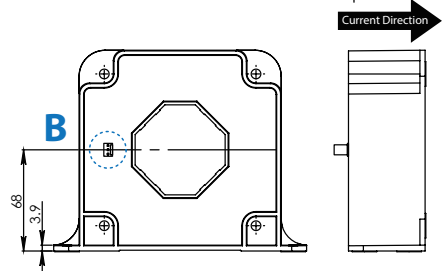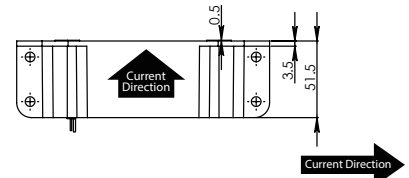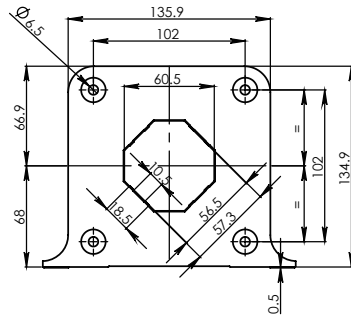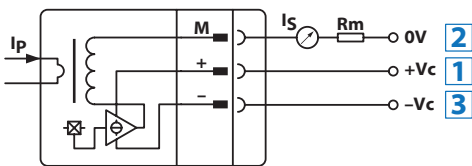

Connector

Manufacturer	Part Number	Old Part Number
Molex	38-00-6293	6410-03C (102)

- Primary through-hole 60.5 x 20.5 mm or Ø max 57 mm

Detail B

Terminal No.
Connector