


Common Mode Chokes

- Dielectric strength: 1250 Vrms.
- Built to meet UL Class B (130°C) insulation system.

- 1 Amp to 15 Amps.
- 0.3 to 125 mH.
- Windings Balanced within 1%.

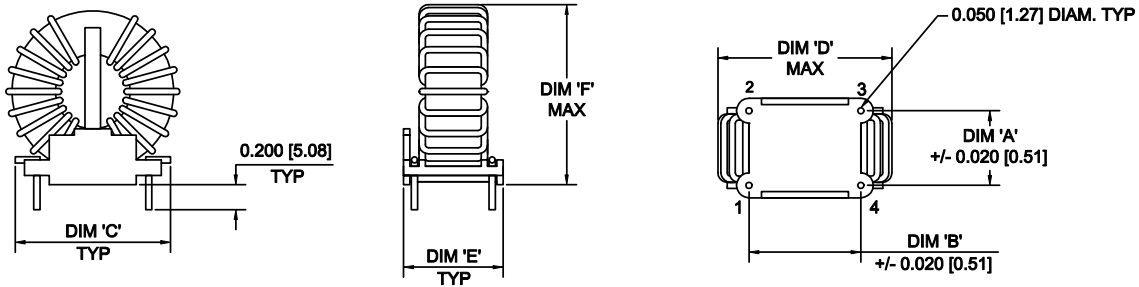

PACKAGE 3											
MODEL NUMBER	RATED CURRENT (Amps)	INDUCTANCE L (mH)	TYPICAL LEAKAGE INDUCTANCE (µH)	TYPICAL IWC (pF)	MAXIMUM DCR @ 25 C (Ohm)	MODEL NUMBER	RATED CURRENT (Amps)	INDUCTANCE L (mH)	TYPICAL LEAKAGE INDUCTANCE (µH)	TYPICAL IWC (pF)	MAXIMUM DCR @ 25 C (Ohm)
CMC-2201	1.0	32.0	292	58	0.712	CMC-2208	6.0	11.5	97	47	0.100
CMC-2202	1.0	56.0	505	99	0.980	CMC-2209	9.0	4.0	30	29	0.020
CMC-2203	2.0	16.0	140	47	0.270	CMC-2210	9.0	7.0	64	41	0.052
CMC-2204	2.0	28.0	280	8	0.370	CMC-2211	12.0	3.0	22	27	0.009
CMC-2205	4.0	8.0	66	40	0.085	CMC-2212	12.0	5.2	51	31	0.032
CMC-2206	4.0	14.0	130	51	0.130	CMC-2213	15.0	2.5	18	23	0.004
CMC-2207	6.0	6.6	52	37	0.060	CMC-2214	15.0	4.4	36	30	0.027

PACKAGE 4											
MODEL NUMBER	RATED CURRENT (Amps)	INDUCTANCE L (mH)	TYPICAL LEAKAGE INDUCTANCE (µH)	TYPICAL IWC (pF)	MAXIMUM DCR @ 25 C (Ohm)	MODEL NUMBER	RATED CURRENT (Amps)	INDUCTANCE L (mH)	TYPICAL LEAKAGE INDUCTANCE (µH)	TYPICAL IWC (pF)	MAXIMUM DCR @ 25 C (Ohm)
CMC-2301	1.0	72.0	900	325	1.280	CMC-2308	6.0	26.0	165	77	0.116
CMC-2302	1.0	125.0	800	122	1.145	CMC-2309	9.0	10.0	117	86	0.062
CMC-2303	2.0	36.0	450	123	0.447	CMC-2310	9.0	17.0	105	70	0.055
CMC-2304	2.0	62.0	400	101	0.412	CMC-2311	12.0	7.5	87	73	0.042
CMC-2305	4.0	19.0	290	89	0.265	CMC-2312	12.0	13.0	85	65	0.037
CMC-2306	4.0	32.0	180	87	0.122	CMC-2313	15.0	6.0	70	71	0.031
CMC-2307	6.0	15.0	188	89	0.118	CMC-2314	15.0	10.0	64	59	0.027

PACKAGE	DIMENSIONS					
	A	B	C	D	E	F
3	0.70	1.20	1.75	1.35	0.900	1.760
4	0.90	1.50	2.05	2.10	1.100	2.280

- Measured criteria: 10mV / 10 KHz.

SCHEMATIC

