


Common Mode Chokes

Package 2

- Wide Range of currents and inductances available.
- 0.50 Amps to 4 Amps.
- 0.35 mH to 14.3 mH.

- Cost effective design.
- Low interwinding capacitance.
- Class B (130°C) insulation.
- 3750 Vrms isolation between windings.

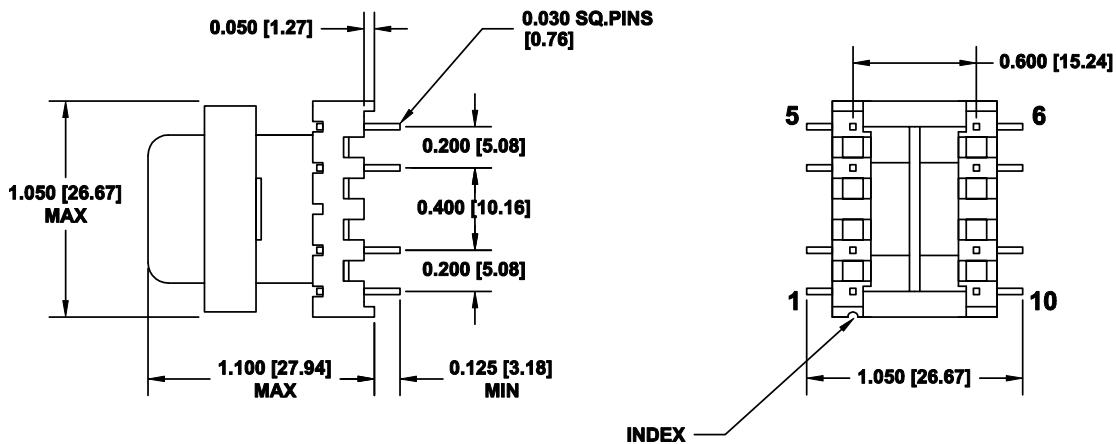

320 Series E-Core Common Mode chokes

Package 2			
MODEL NUMBER	MAXIMUM CURRENT (A rms)	Lp +/- 25% (mH)*	MAXIMUM DCR EACH WINDING (Ohm)
320-0556	0.50	8.28	0.850
320-0557	0.75	6.20	0.600
320-0558	1.00	2.98	0.325
320-0559	1.25	2.07	0.225
320-0560	1.50	0.92	0.130
320-0561	2.00	0.58	0.080
320-0562	2.50	0.45	0.056
320-0563	3.00	0.33	0.040
320-0564	3.50	0.23	0.030
320-0565	4.00	0.15	0.025

* Measured criteria: 10mV / 10 KHz.

SCHEMATIC

