

BDX Battery Disconnect

Single And Dual Battery Disconnect System

Meet the battery disconnect switch panel that makes sure

The BDX Battery Disconnect is an easy-to-install system that will allow specialty vehicle owners to monitor battery voltage and disconnect auxiliary and chassis batteries with just the touch of a switch. With the BDX Battery Disconnect, the operator or owner can be sure the batteries are disconnected when the vehicle is not in use or being stored off-season. It is conveniently located inside the vehicle, and it's all remote.

The heart of the BDX Battery Disconnect system is another Intellitec invention. The battery disconnect is our standard latching relay, capable of carrying heavy starter and auxiliary Loads, draws power only when switched on or off: yet, it requires **no** power to stay **open or closed** . This sturdy relay is sealed against the environment and is Ignition protected.

See model choices with part numbers as listed.

Intellitec P/N: 10-01090-001

Intended for remote disconnect of either chassis or auxiliary battery of a vehicle. This BDX system includes 1 X 100A battery disconnect relay, 25 ft. of cable, BDX monitor panel with voltmeter, and ignition interlock to prevent disconnection while engine is running.



Unwanted battery drain during storage, or when the vehicle is not in use, is not the only customer benefit of BDX Battery Disconnect. Disconnecting your batteries during service also prevents shorts or fire hazard while working on the 12 Volt electrical system.

There are four models in the BDX Battery Disconnect product line. There is one that's right for every vehicle and every customer.

Intellitec P/N: 10-01090-002

Intended for remote disconnect of either chassis or auxiliary battery of a vehicle. This BDX system includes 1 X 200 AMP battery disconnect relay, 25 ft. of cable, BDX monitor panel with voltmeter, and ignition interlock to prevent disconnection while engine is running.



www.intellitec.com

1485 Jacobs rd.
Deland, Florida 32724
386 738-7307

P/N 53-01090-000 Rev. B 092316

Intellitec P/N: 10-01090-101


Intended for remote disconnect of both auxiliary and chassis batteries of RVs and specialist vehicles with dual batteries. This BDX system includes two 100 AMP battery disconnect relays, 25 ft. of cable, and BDX monitor panel with two LED ON/OFF indicators, digital voltmeter and ignition interlock to prevent disconnection while engine is running.

**Intellitec P/N: 10-01090-102**


Intended for remote disconnect of both auxiliary and chassis batteries of RVs and specialist vehicles with dual batteries. This BDX system includes 1 X 100 AMP & 1 X 200 AMP battery disconnect relays, 25 ft. of cable, and BDX monitor panel with two LED ON/OFF indicators, digital voltmeter and ignition interlock to prevent disconnection while engine is running.



SINGLE DISCONNECT SYSTEM WIRING

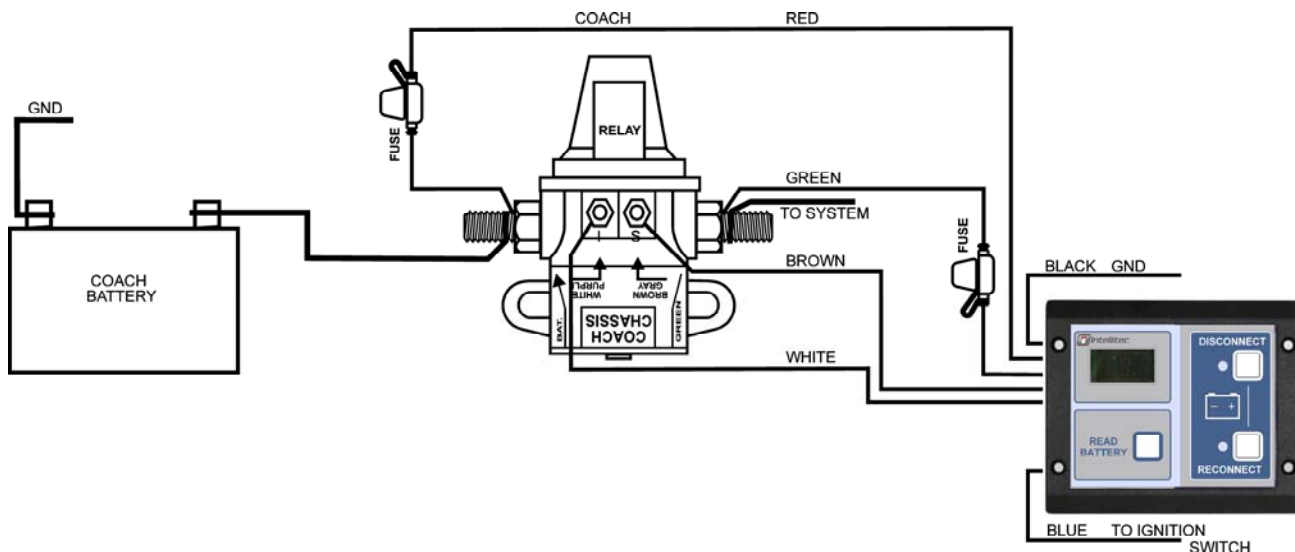

DUAL DISCONNECT SYSTEM WIRING

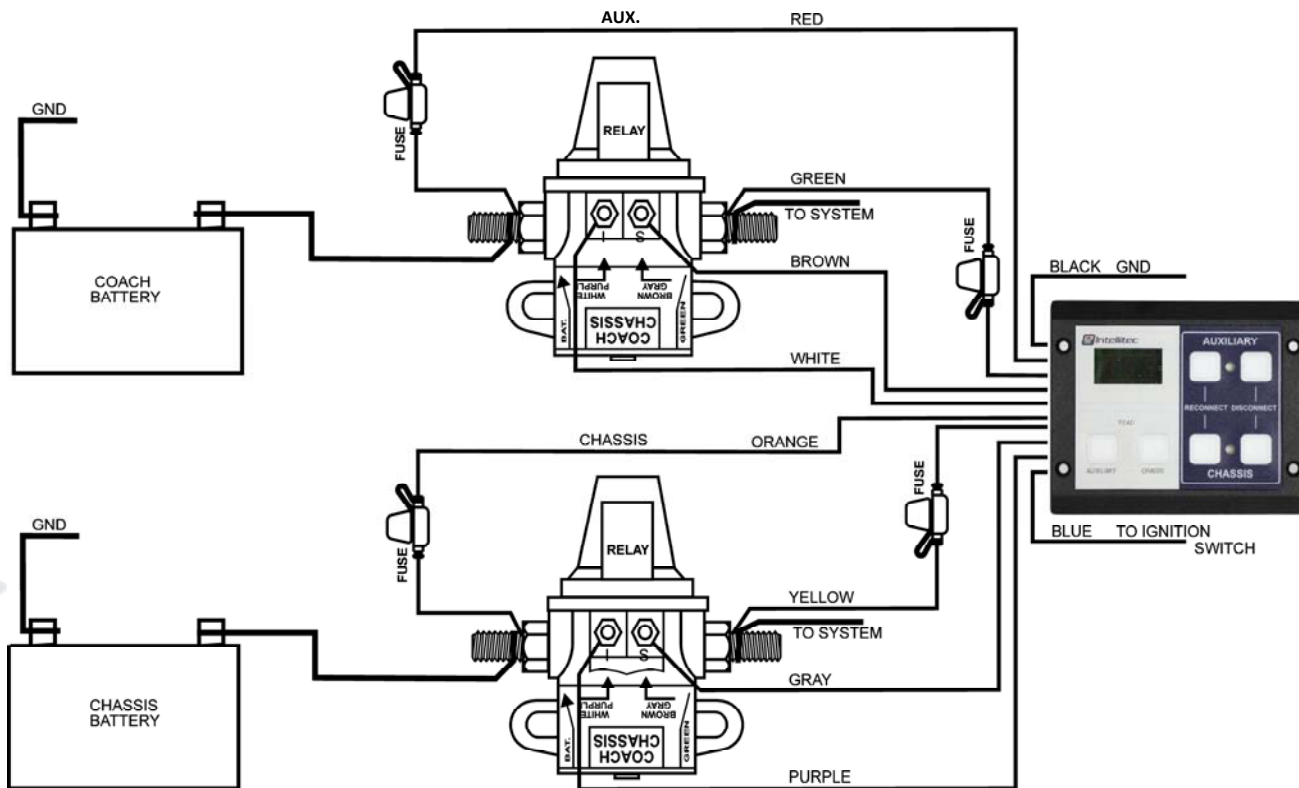

www.intellitec.com

1485 Jacobs rd.
Deland, Florida 32724
386 738-7307