


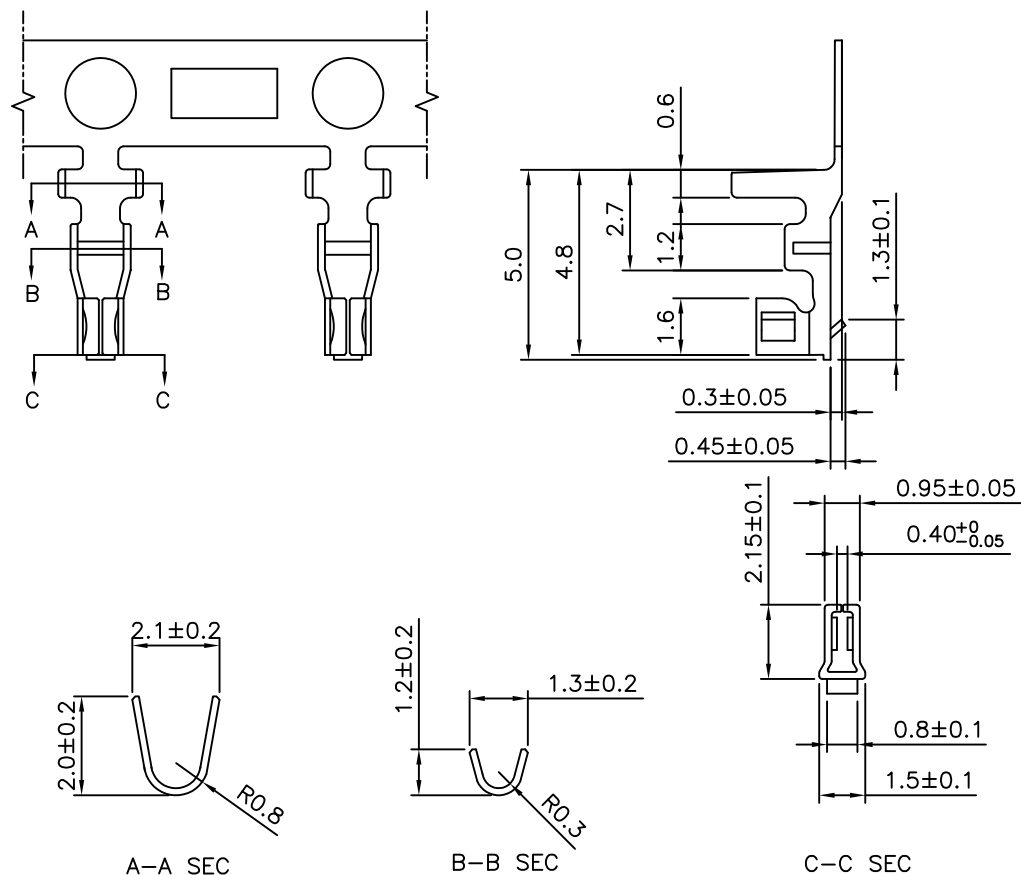

ELECTRICAL:

CURRENT RATING: 2A

DIELECTRIC WITHSTANDING VOLTAGE: 500VAC (1min.)

INSULATOR RESISTANCE: 1000 Megaohms min.

CONTACT RESISTANCE: 20 Milliohms max.

OPERATING TEMPERATURE: -25°C to +85°C

HOW TO ORDER:

W **0** **3** **2** - **0** **0** **0** **0** - **0** **0** **1** - **Z**
NUMBER OF CONTACTS: 02 thru 16
DEFINITION: 0 - CONTACTS
CONTACT PLATING: 1-TIN PLATED
RoHS COMPLIANT

MATERIAL:

CONTACT: Copper Alloy

INSULATOR: Nylon 66 UL94V-0

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	B.S.	S.M.	4/24/07	
SCALE: N/A					JST CR Type
					WAFER JST TYPE 2.00mm, Contact, # 26-28 AWG
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/- 0.15	ANGLE +.45 / -.15	UNIT: in / mm
P/N: W032-0000-001-Z					Pg: 1