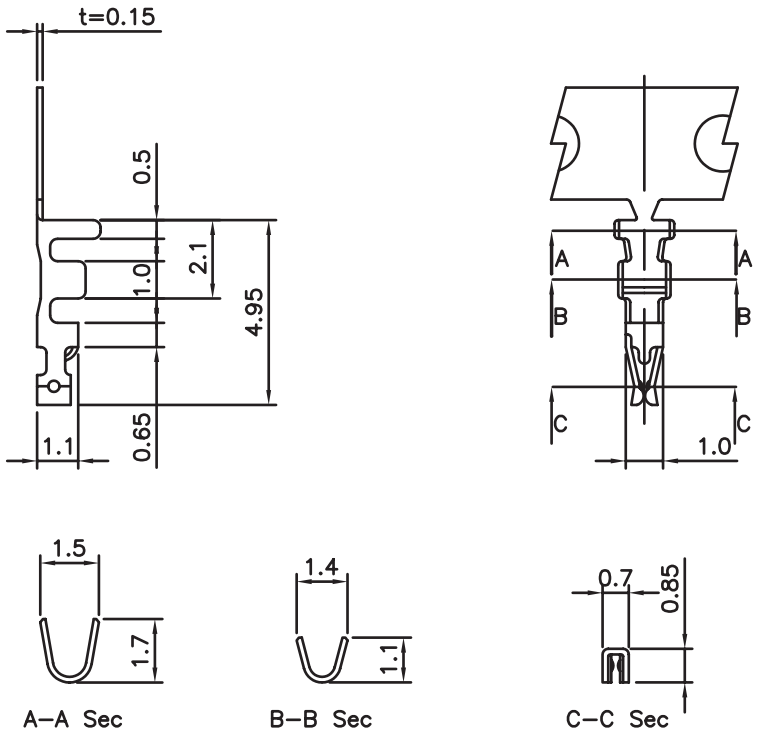

■ **SPECIFICATIONS**

- Voltage Rating : 100 V AC/DC
- Current Rating : 1A AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : 500MΩ min
- Temperature Range : - 25℃ to + 85℃
- Contact Resistance : 20mΩ max

■ **HOUSING**

- Applicable Wires : AWG# 28 - 32
- Material : Phos. Bronze
- Finish : Tin Plated
- Thickness : 0.15mm
- Q'ty : 15,000 pcs./Reel

HOW TO ORDER:

W 1 2 6 - 0 0 0 2 - 0 0 1 - 0

 # OF POSITIONS:
2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 20, 25, 30

HOUSING & TERMINATION TYPE:
0 - FOR CONTACTS

TYPE:
2 - CONTACTS

STYLE
1 - FOR CONTACT ONLY
- TIN PLATED

RoHS COMPLIANT

Rev		Drawn	Checked	Approved	Date
0	Issued	MDH	S.M.	S.M.	09/16/04
A	Revised for RoHS Compliance	B.S.	S.M.	S.M.	08/01/08

SMP TECHNOLOGY, INC.

Contacts for W126 1.25mm Housing

TOL. DEC. .X +/- .XX +/- .XXX +/- ANGLE +/- UNIT: mm

P/N: **W126-0002-001**