

HOW TO ORDER:

DIMENSION(mm)

DIMENSION NUMBER	A	B	C
60	2.80	1.05	5.04


* OTHER DIMENSIONS AVAILABLE

ELECTRICAL:

CURRENT RATING: 0.5A
 CONTACT RESISTANCE: < 30mΩ
 INSULATOR RESISTANCE: > 1000MΩ
 DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR 1 MIN.
 OPERATING TEMPERATURE: -55° C TO +105° C

MATERIAL:

INSULATOR: HIGHT TEMPERATURE PLASTIC, UL94V-0
 CONTACT MATERIAL: Copper Alloy

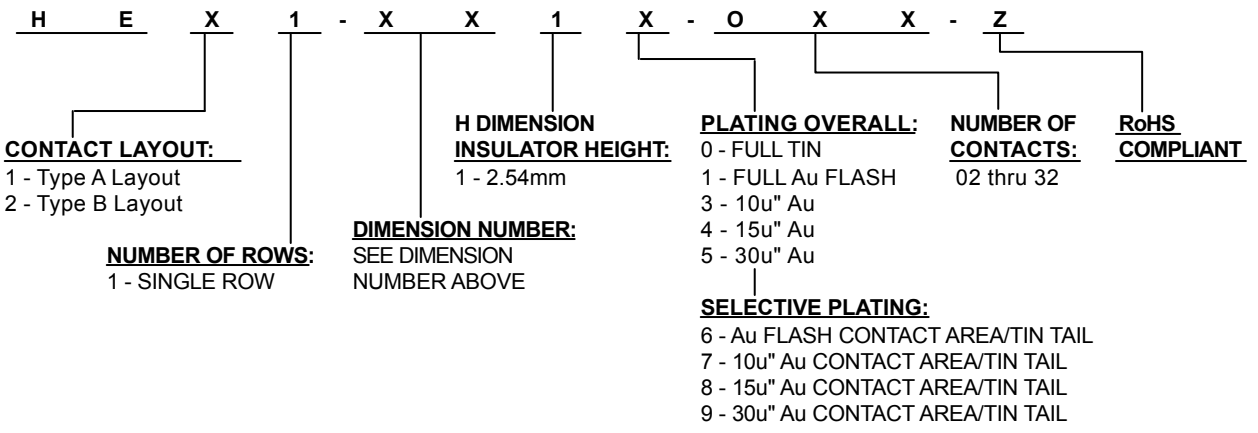

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	S.E.	S.M.	S.M.	10/1/97	
A	Updated	D.H.	S.M.	S.M.	03/31/04	
B	Updated for RoHS Compliance	B.S.	S.M.	S.M.	4/26/07	
SCALE		MAT'L		FINISH		Pin Header, 1.27mm Pitch Single Row, Surface Mount, .46mm Sq. Post
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/-	ANGLE +/-	UNIT: mm	SERIES: H E X 1 - X X 1 X - 0 X X - Z Pg: 1