


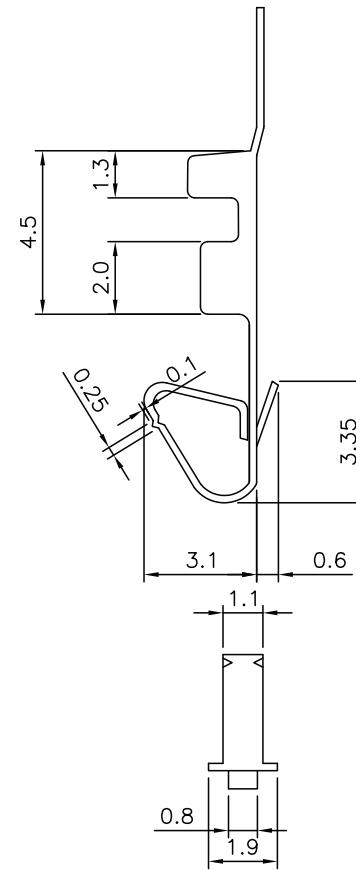


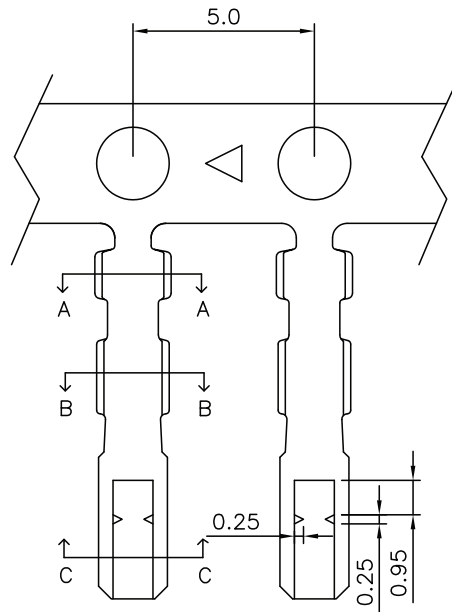


Contact is Used With Housing
P/N: W019-XX04-120-Z



A-A SEC



B-B SEC

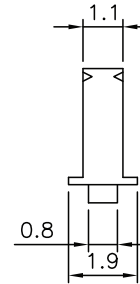

C-C SEC

ELECTRICAL:

CURRENT RATING: 3A AC, DC
VOLTAGE RATING: 250V AC MAX.
OPERATING TEMPERATURE: -25 ° TO +85 °C
CONTACT RESISTANCE: 20 MILLIOHM MAX.
INSULATION RESISTANCE: 1000 MEGAOHM MIN.
VOLTAGE WITHSTANDING: 1000V AC / MINUTE

MATERIAL:

CONTACT MATERIAL: COPPER ALLOY
APPLICABLE WIRE SIZES: AWG #22-28
WAFER MATERIAL: NYLON 6/6 UL 94V-2
PACKAGING: 10,000 Pcs/ Reel

HOW TO ORDER:

W 0 1 9 - 0 0 0 0 - 1 0 X - Z

CONTACT PLATING

1-TIN PLATED
2-GOLDFLASH
3-10u" GOLD
5-30u" GOLD

RoHS COMPLIANT

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	B.S.	S.M.	S.M.	5/31/07	
					2.54mm Pitch, Contacts, Locking Type
SCALE: N/A					SERIES: W019-0000-10X-Z
TOL. DEC.	.X +/- 0.3	.XX +/- 0.2	.XXX +/- 0.1	ANGLE +/-	
				UNIT: mm	Pg: 1