
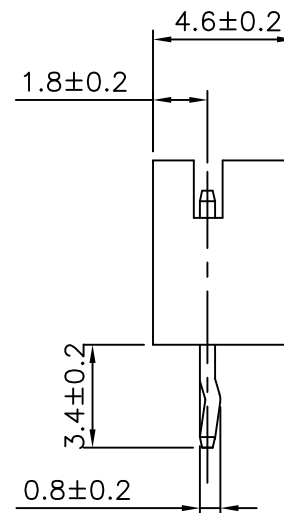


Recommand PCB Layout

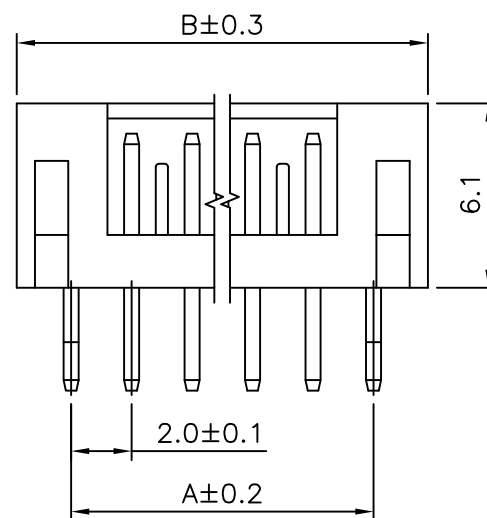

ELECTRICAL:

VOLTAGE: 250 V AC/DC

CURRENT RATING: 2A

DIELECTRIC WITHSTANDING VOLTAGE: 500VAC (1min.)

INSULATOR RESISTANCE: 1000 Megaohms min.

CONTACT RESISTANCE: 20 Milliohms max.

OPERATING TEMPERATURE: -25°C to +85°C

HOW TO ORDER:

W 0 3 2 - X X 0 1 - 0 0 X - Z

NUMBER OF CONTACTS:

02 thru 16

DEFINITION:

1- STRAIGHT

CONTACT PLATING:

1-TIN PLATED

2-GOLD

RoHS

COMPLIANT

MATERIAL:

CONTACT: Copper Alloy

INSULATOR: Nylon 66 UL94V-0

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	B.S.	S.M.	4/24/07	
SCALE: N/A					JST CR Type
					WAFER JST TYPE 2.00mm, Straight
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/- 0.15	ANGLE +.45 / -.15	UNIT: in / mm
P/N: W032-XX01-00X-Z					Pg: 1