
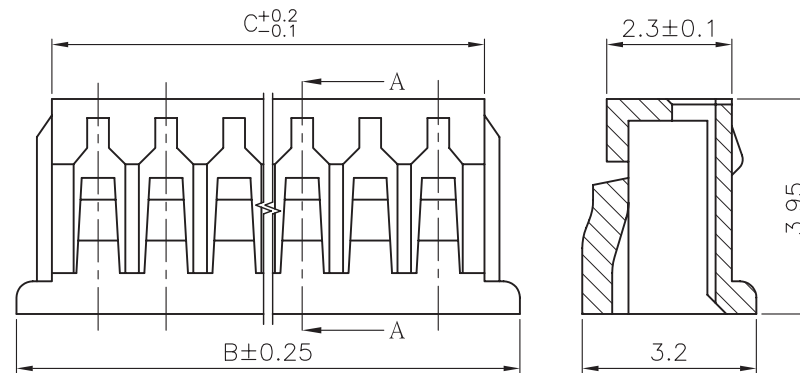


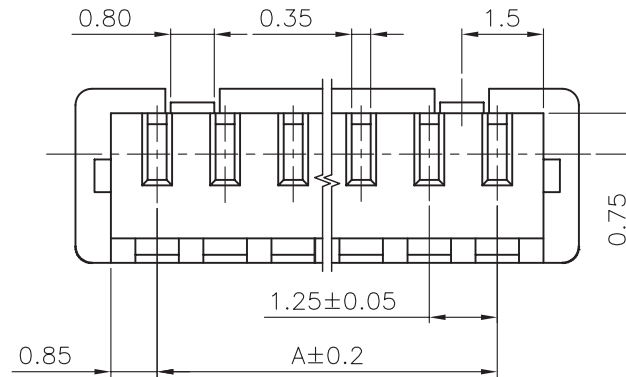

Section A-A

HOW TO ORDER:

W 1 2 5 - X X 4 1 - 0 0 0 - Z

OF POSITIONS:

02 - 15

HOUSING & TERMINATION TYPE:

4 - HOUSING FOR CONTACTS (CRIMP)

RoHS COMPLIANT:

Circuits	Dimensions(mm)		
	A	B	C
2	1.25	4.25	2.95
3	2.50	5.50	4.20
4	3.75	6.75	5.45
5	5.00	8.00	6.70
6	6.25	9.25	7.95
7	7.50	10.50	9.20
8	8.75	11.75	10.45
9	10.00	13.00	11.70
10	11.25	14.25	12.95
11	12.50	15.50	14.20
12	13.75	16.75	15.45
13	15.00	18.00	16.70
14	16.25	19.25	17.90
15	17.50	20.50	19.20

ELETRICAL:

CURRENT RATING: 1A AC/DC

VOLTAGE RATING: 250V AC/DC

CONTACT RESISTANCE: 20 mW max.

DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC for 1 min.

INSULATION RESISTANCE: 100 MW/Min.

TEMPERATURE RANGE: -40°C to 85°C

HOUSING:

MATERIAL: Nylon 66 UL94V-0

Q'ty: 1,000 Pcs./Bag

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	A.M.	S.M.	S.M.	09/19/03	
A	Revised For RoHS Complince	A.M.	S.M.	S.M.	10/15/05	
SCALE:n/a						1.25mm Pitch, Housing, Used With Contacts (P/N: W125-0002-001-Z)
TOL. DEC.	X +/- 0.2	XX +/- 0.15	XXX +/- 0.10	ANGLE +/-	UNIT: mm	P/N:W125-XX41-000-Z Pg: 1