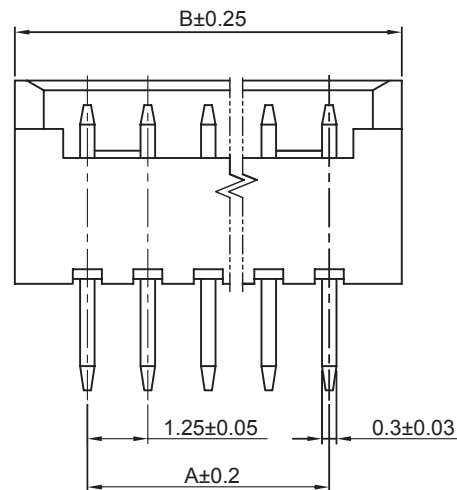
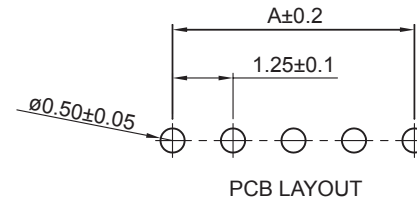
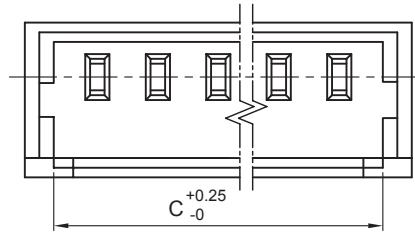


Circuits	Dimensions (mm)		
	A	B	C
2	1.25	4.25	3.05
3	2.50	5.50	4.30
4	3.75	6.75	5.55
5	5.00	8.00	6.80
6	6.25	9.25	8.05
7	7.50	10.50	9.30
8	8.75	11.75	10.55
9	10.00	13.00	11.80
10	11.25	14.25	13.05
11	12.50	15.50	14.30
12	13.75	16.75	15.55
13	15.00	18.00	16.80
14	16.25	19.25	18.05
15	17.50	20.50	19.30

ELECTRICAL:

CURRENT RATING: 1A AC/DC

VOLTAGE RATING: 250V AC/DC

CONTACT RESISTANCE: 20 mΩ max.

DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC for 1 min.

INSULATION RESISTANCE: 100 MΩ Min.

TEMPERATURE RANGE: -40°C to 85°C

MATERIAL:

CONTACT: Copper Alloy

BASE: Nylon PA46 UL94V-0

FINISH: Tin Plated over Nickel

Q'ty: 1,000 Pcs./PVC Box

HOW TO ORDER:

W	1	2	5	-	X	X	1	0	-	3	1	0	-	Z
					<u># OF POSITIONS:</u>			<u>PACKAGING</u>			<u>RoHS</u>			
					02 - 15			3- PVC TRAY			<u>COMPLIANT</u>			
					<u>HOUSING & TERMINATION TYPE:</u>						<u>OPTIONS:</u>			
					1 - VERTICAL HEADER THRU HOLE						1 - P.S. TAIL, VERTICAL, 3.2mm LENGTH			