Interface Masters

Niagara 4224-24TG

TECHNOLOGIES | Innovative Network Solutions

48-Port-Hybrid-Hardware-Packet-Mast

24 ports 10 Gigabit SFP+ & 24 RJ45 1 Gigabit Copper

Overview

The Niagara 4224-24TG is a 48 Port 10 Gigabit Hardware Packet Master/Loadbalancer for network analysis and monitoring applications. The Packet Master has flexible and extensive configuration options which enable it to be tailored to optimize the way traffic is managed. The system can support L2-L4 packets, IPv6 and IPv4 traffic, MPLS packets and provides the ability to customize keys for distribution.


The system support 24 ports of 1G RJ45 Copper and up to 24 ports SFP+ support including multimode, single-mode and copper options. The Packet Master provides sophisticated features for flexible traffic management including mirroring to multiple ports, aggregation of multiple ports to a single port, and an extensive filtering engine.

There are several session based load balancing methodologies supported which enable traffic to be distributed according to any configured output of ports and the distributing keys can be defined as follows:

- VLAN ID
- IP-Src, IP-Dst
- MAC-Src, MAC-Dst
- TCP-Port
- UDP-Port
- User Defined Byte (UDB) configurable distribution key

Key Features

- 24 Ports 1G RJ45 Copper
- Up to 24 ports 10 Gigabit SFP+ (support 1G SFP fiber or copper)
- Low Power Consumption 265 Watts
- Traffic Distribution and session-based load balancing
- Traffic Aggregation
- Mirroring of one to many and any to any
- L2, L3 and L4 filtering
- Packet slicing
- MPLS, Q in Q support
- Port Failover Mechanism
- Advanced Management Syslog, TACACS+, RMON, secure WEB, CLI, SSH, counters
- Web GUI intuitive "drag and drop" and "point & click" configuration of input ports, output ports and filters
- 1U Rackmount Form Factor
- Dual AC or DC Redundant removable power supplies for maximum reliability
- Front to back and back to front airflow (factory configurable)
- Support for a total of 2000 filtering and redirection rules

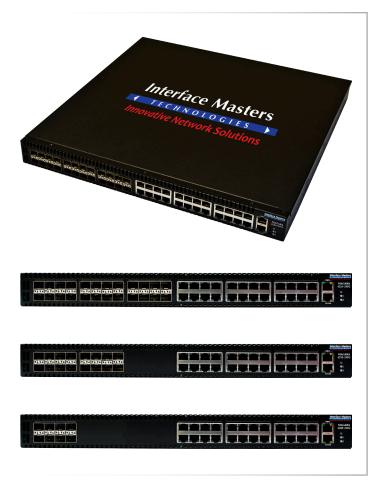

System Characteristics

- Max system throughput 960 Gbps
- Support for RJ45, SFP and SFP+ (SR, LR, ER, SX, LX, TX)
- LC connectors on SFP+ ports
- Low Power 265 Watts
- 1U chassis
- Serial console and Ethernet management port
- Full RoHS compliance
- EMC, FCC Class A, UL (Safety) Certifications

| Environmental | | Dimensions | | |
|---------------------------|---------------------------------|------------|---------|--------|
| Operating Temperature | 0 to 55 ℃ or 32 to 131 ℉ | | mm | inches |
| Relative Humidity | 5% min, 95% max, non-condensing | Length | 440.182 | 17.33 |
| Maximum Power Consumption | 265 Watts | Height | 44.450 | 1.75 |
| Airflow | 100 lf/m | Width | 440.182 | 17.33 |

Ordering Part Numbers

| Part Number | Description |
|---------------------|---|
| Niagara 4224-24TG | 24 port 10 Gigabit SFP+ & 24 port 1G RJ45 Copper Hardware PacketMaster/Loadbalancer |
| Niagara 4216-24TG * | 16 port 10 Gigabit SFP+ & 24 port 1G RJ45 Copper Hardware PacketMaster/Loadbalancer |
| Niagara 4208-24TG * | 8 port 10 Gigabit SFP+ & 24 port 1G RJ45 Copper Hardware PacketMaster/Loadbalancer |

* Please contact factory for more information.

Product Line

- Network Interface Cards with Bypass
- Network Interface Cards without Bypass
- External Bypass Products
- SSL/IPSec Cards
- Embedded Switches
- Embedded Platforms
- Development Tools
- TAP Systems

About Interface Masters Technologies, Inc.

Interface Masters Technologies is a leading vendor in the network monitoring and high speed networking markets. Based in the heart of the Silicon Valley, Interface Masters' expertise lies in Gigabit, 10 Gigabit and 40 Gigabit Ethernet network access and network connectivity solutions that integrate with monitoring systems, inline networking appliances, IPS, UTM, Load Balancing, WAN acceleration, and other mission-critical IT and security appliances.

Flagship product lines include <u>hardware load-balancers</u>, <u>specialized 10GE internal server</u> <u>adapter cards</u>, switches, <u>10 Gigabit external intelligent Network TAP</u> and <u>Bypass</u> and <u>failover</u> systems that increase network visibility capabilities, network reliability and inline appliance availability.

Company Headquarters is located in San Jose, CA with satellite offices in Hong Kong and Europe.



Contact Interface Masters

227 Devcon Dr., San Jose, CA 95112 Phone: 408-441-9341 x122 Fax: 815-364-0888 Email: <u>sales@interfacemasters.com</u> Web: <u>www.interfacemasters.com</u>

Interface Masters

Innovative Network Solutions