

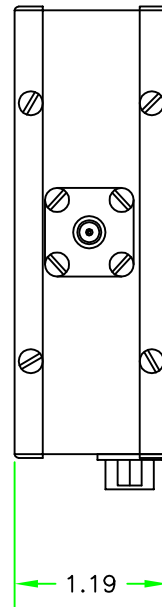



SMA FEMALE  
5-PLACES

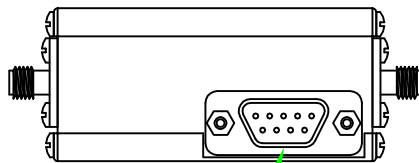


4-40 x .250 DP  
4-PLACES

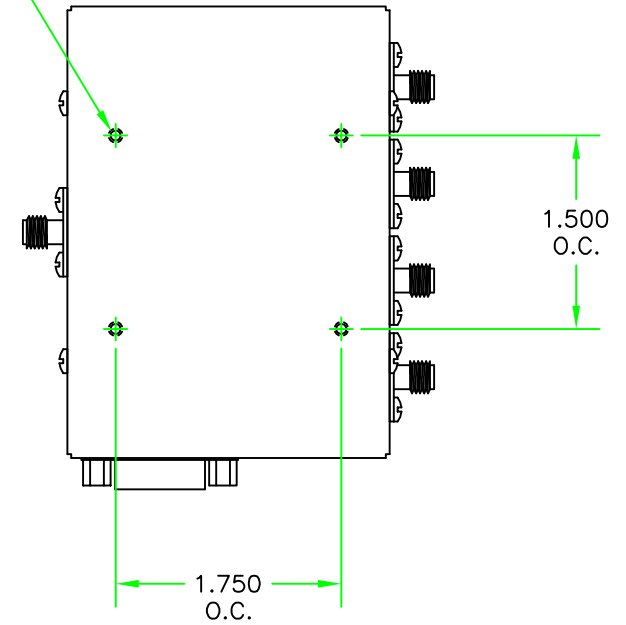

DETAIL A  
DE-9P

PIN	FUNCTION
1	TTL CONT. 1
2	TTL CONT. 2
3	TTL CONT. 3
4	TTL CONT. 4
5	NO CONNECTION
6	NO CONNECTION
7	+5 Vdc
8	+ Vdc
9	GROUND

 <b>JFW INDUSTRIES, INC.</b> INDIANAPOLIS, IN						PROPRIETARY INFORMATION		
REV	ECN	DATE	BY	DRAWN BY	T. ZEISS	DATE	2-7-00	ALL SURFACES ARE TO BE FREE OF BURRS, PITS, & SCRATCHES
A	12351	1-19-06	TEZ	APP'D BY		SCALE	FULL	TOLERANCES
				MATERIAL	BRASS		FRACTIONAL DIM. ± 1/64	
				FINISH	NICKEL		2 PLACE DECIMAL ± .010	
				DESCRIPTION	50S-XXXX: 1P4T SWITCH		3 PLACE DECIMAL ± .005	
							ANGULAR DIM. ± 1/2°	
							DWG NO. 092-3320	