
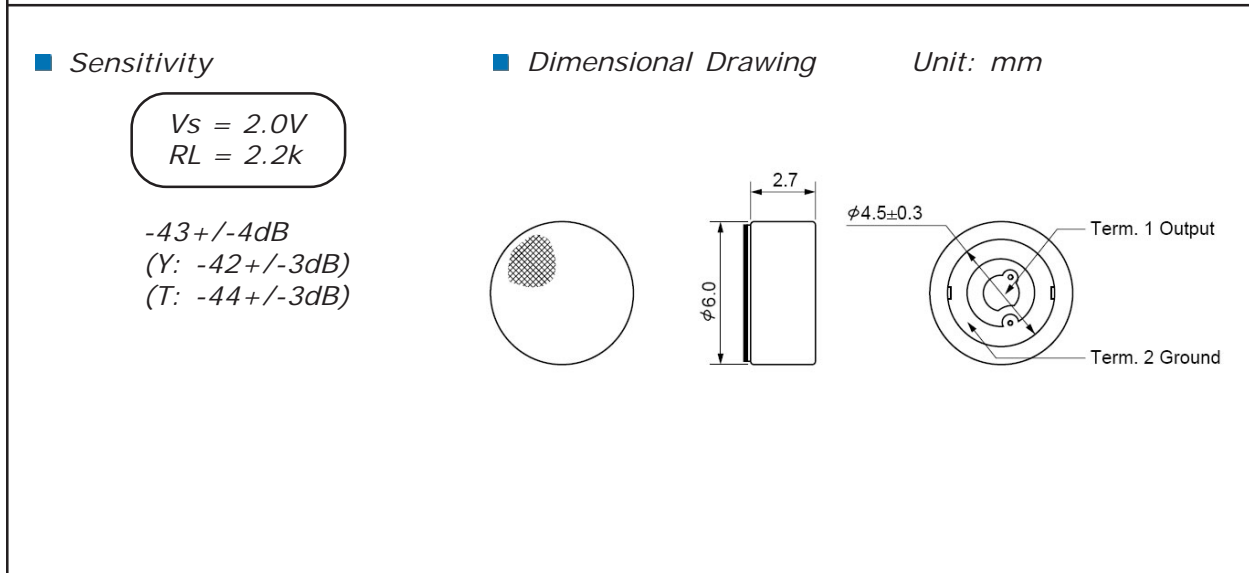


Omni-directional Back Electret Condenser Microphone Cartridge

JLI-62HN

- ✓ Non-Soldering connection
- ✓ Provides gold plated contact area
- ✓ Very small, thin type omnidirectional microphone
- ✓ Most suited to products having limited space
- ✓ Back electret type designed for high resistance to vibrations
- ✓ Better-shielded, RF-noise resistant type

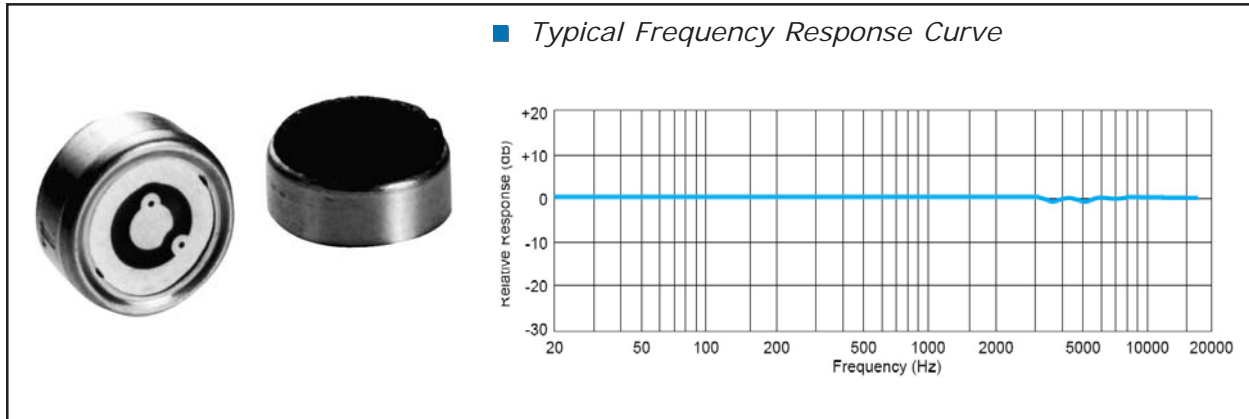

SPECIFICATIONS	
Sensitivity	-43 +/- 4dB (0dB=1V/Pa, 1kHz)
Impedance	Less than 2.2k
Directivity	Omnidirectional
Frequency	20Hz - 16kHz
Max. operation voltage	10V
Standard operation voltage	2V
Current consumption	Max. 0.5mA
Sensitivity reduction	Within -3dB @ 1.5V
Signal to noise ratio	More than 58dB



P.O. Box 7
 Harleysville, PA 19438-0007 US
 Phone: 215-256-3200
 Fax: 215-256-1647
 E-mail: info@jlielectronics.com
 www.jlielectronics.com