








**Electrical Characteristics**

Type No.	Maximum Allowable Voltage		Varistor Voltage V / 0.1mA		Maximum Clamping Voltage V@5A (V)	Withstanding Surge Current ( 8/20 $\mu$ s )		Rated Wattage (W)	Energy (10/1000 $\mu$ s) (J)	Certfcation	
	ACrms (V)	DC (V)	(V)	Tolerance		1 Time (A)	2 Times (A)			  	 
5N330K	20	26	33	$\pm 10\%$	※73	100	50	0.01	1.1	★	★

※The clamping voltage from 180M to 680K are tested at current 1A.

Material of coating : Epoxy powder

Color of coating : Yellowish brown

Storage condition→ Temperature: -10℃ ~ 40℃ / Humidity : 75%RH max. Status


Preservation period : 12 months

Max. response time : 25 n sec.

Operation temperature range : -40 ~ 85℃

**Lead style :**

- P : Straight type
- Y : Kink type
- I : Inside kink type
- E : Outside kink type

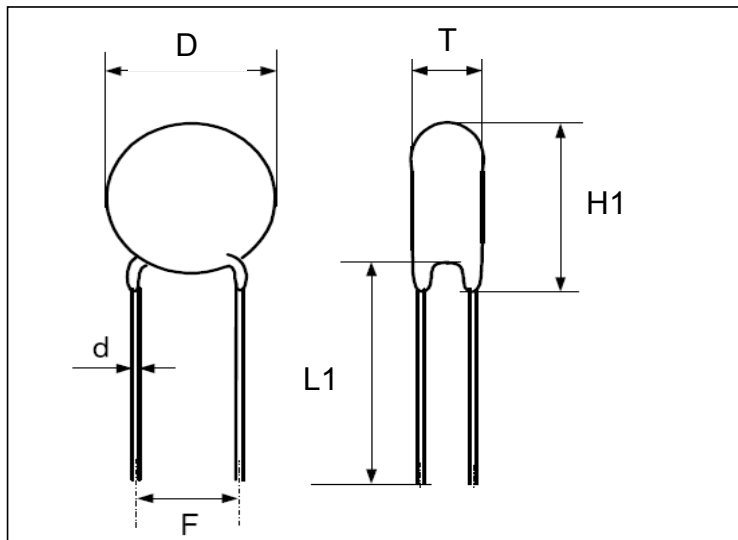

**DIMENSION :**

( Unit : mm )

Type No.	D max	T max	L1 min	F $\pm 1.0$	d $\pm 0.05$	H1 max
5N330K	7.5	4.7	25.0	5.0	0.6	10.5