



ELECTRICAL CHARACTERISTICS

Part No.	Working Voltage (Vw)	Clamping Voltage (Vc)	ESD Withstanding	Capacitance (C)		Capacitance Tolerance
	Volts	Volts	Times	pF		%
	<15 μ A	1A,8/20 μ s	8KV*	1KHz	1MHz	
JMV0402C050T4R7	5.0	50	> 1000	-	4.7	-20% ~ +80%

* - In system ESD withstanding pulse per IEC 61000-4-2, 8KV, contact discharge method.

Vw - The max. steady state DC operating voltage of which varistor could maintain also not exceeding 15uA leakage current.

Vc - The peak voltage acrossed the varistor measured at a specified pulse current and waveform.


C - The device capacitance measured with 1.0Vrms, 1KHz / 0.5rms, 1 MHz.

Storage condition Temperature : 30 ; Humidity : 60% RH (Moisture Sensitivity Levels: 2a)

Preservation period 12 months

Operating temperature: -55 ~ 85

Storage temperature: -55 ~ 85

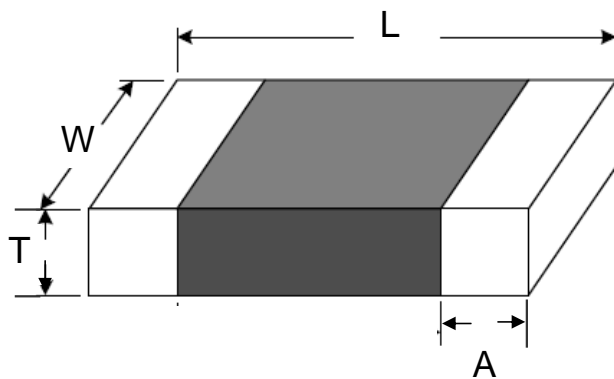

Chip Dimension

inch (mm)

Chip Size	L	W	T	A
0402 (1005)	0.040 \pm 0.004 (1.00 \pm 0.10)	0.020 \pm 0.004 (0.50 \pm 0.10)	0.024 max. (0.6 max.)	0.010 \pm 0.006 (0.25 \pm 0.15)