


# SDHK CONNECTOR



1.1mm pitch/ Micro SD card Flip cover type

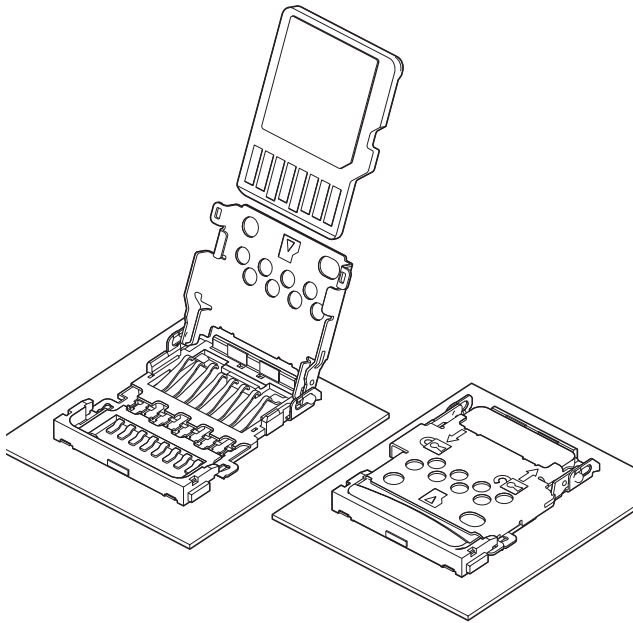

**This is micro SD card connector of flip cover type that can approach from above the PC board surface.**

## Specifications


- Current rating: 0.5 A AC, DC
- Voltage rating: 15 V AC, DC
- Temperature range: -25°C to +85°C  
(including temperature rise in applying electrical current)
- Contact resistance: Initial value/ 80 mΩ max.  
After environmental tests/ 160 mΩ max.  
(variation from initial value)
- Insulation resistance: 100 MΩ min.
- Withstanding voltage: 500 VAC/minute
- Applicable card: Micro SD card

\* Refer to "General Instruction and Notice when using Terminals and Connectors" at the end of this catalog.


\* Contact JST for details.

\* Compliant with RoHS.

## Connector

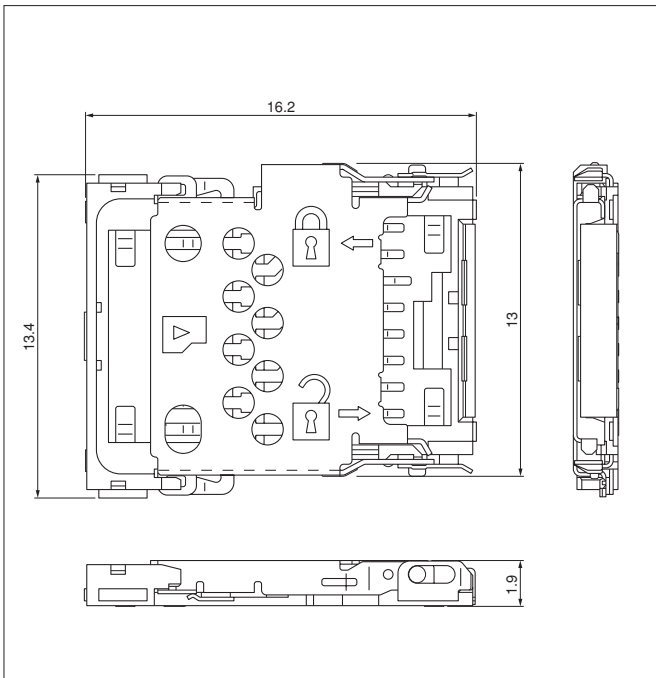

## PC board layout

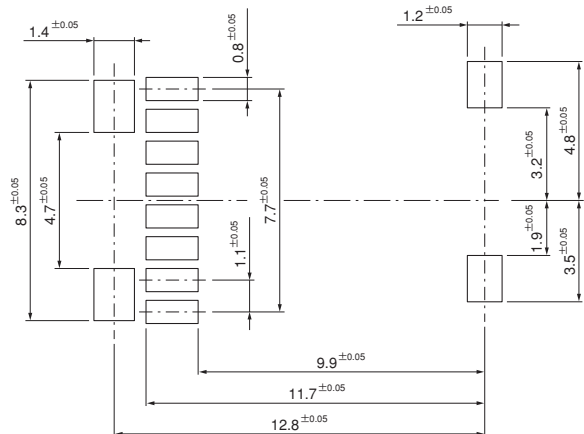

Model No.

Q'ty/reel

SDHK-8BNS-K-303-TB(HF)

1,400

### Material and Finish

Contact: Copper alloy, nickel-undercoated, gold-plated  
Housing: Heat resisting resin, black  
Cover: Stainless

### RoHS compliance

The product listed above are supplied on embossed-tape.