



裸端子(ニツ穴)(SD形)

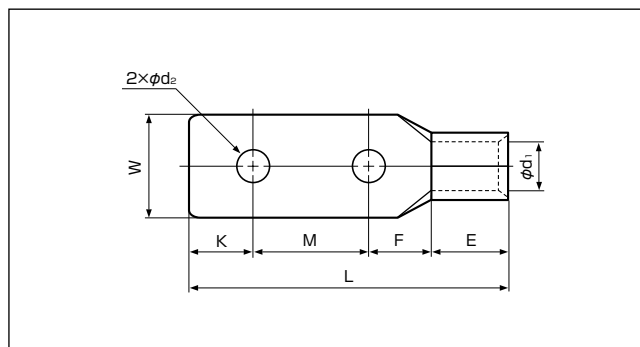


JRS図番 ED565989

JRS・JST形番	適用電線		寸法(mm)									適用圧着工具(JRS分類記号表示です。 当社形番との対比は工具対照表参照)	1箱 入数 (個)
	電線種別	仕上り外径	φd2	φd1	L	E	W	M	K	F	板厚	油圧式	
SD60-10	WV1-50	17.5±0.3	11.0	11.4	86.0	18.5	22.0	28.0	15.0	24.5	2.0	P-2 (本体) F-1,M-1 (ヘッド) E-1,E-2	50
	WN2-50	18.9±0.9											
	WB2-50	18.9±0.9											
	WV1-60	18.9±0.9											
	WN2-60	20.4±0.9											
	WB2-60	20.4±0.9											
SD80-10	WN1-80	22.0±1.0	11.0	14.5	86.0	19.0	27.0	28.0	15.0	24.0	2.3	P-2 (本体) F-1 M-1 (ヘッド) E-1 E-2	25
	WB1-80	22.0±1.0											
	WN2-80	22.4±1.0											25
	WB2-80	22.4±1.0											
SD100-10	WN1-100	23.7±1.0	11.0	16.4	87.0	19.5	28.5	28.0	15.0	24.5	2.6	(本体) F-1 M-1 (ヘッド) E-1 E-2	20
	WB1-100	23.7±1.0											
	WN2-100	25.3±1.0											
	WB2-100	25.3±1.0											
SD150-12	WN2-150	29.0±1.1	14.0	19.5	107.0	28.0	36.0	32.0	18.0	29.0	3.2	(本体) F-1 M-1 (ヘッド) E-2	20
SD200-12	WB2-150	29.0±1.1	14.0	19.5	107.0	28.0	36.0	32.0	18.0	29.0	3.2		10
	WN2-200	31.6±1.2	14.0	24.0	118.0	32.0	44.0	32.0	18.0	36.0	4.0		5
SD325-12	WB2-200	31.6±1.2	14.0	24.0	118.0	32.0	44.0	32.0	18.0	36.0	4.0	(本体) F-1 M-1 (ヘッド) E-2	10
	WN2-250	35.7±1.3	14.0	28.0	125.0	37.0	50.5	32.0	18.0	38.0	4.5		5
SD325-12	WB2-250	35.7±1.3	14.0	28.0	125.0	37.0	50.5	32.0	18.0	38.0	4.5	(本体) F-1 M-1 (ヘッド) E-2	5
	WN2-250	35.7±1.3	14.0	28.0	125.0	37.0	50.5	32.0	18.0	38.0	4.5		5

注) 本製品の中には多少納期を要するものもあります。



裸端子(ニツ穴)(SDA形)

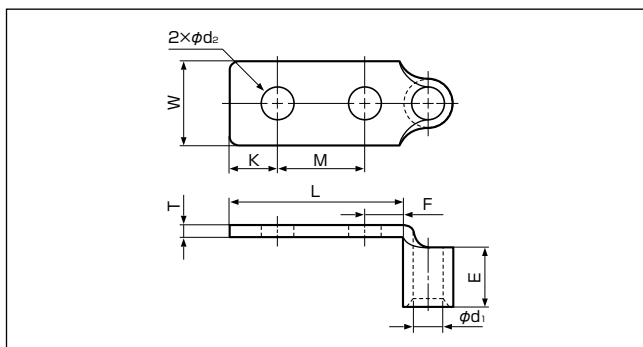

JRS図番 ED565989

JRS・JST形番	適用電線		寸法(mm)									適用圧着工具(JRS分類記号表示です。 当社形番との対比は工具対照表参照)	1箱 入数 (個)
	電線種別	仕上り外径	φd2	φd1	L	E	W	M	K	F	T	油圧式	
SDA60-10	WV1-50	17.5±0.3	11.0	11.4	59.0	18.5	22.0	28.0	15.0	16.0	2.0	P-2 (本体) F-1 M-1 (ヘッド) E-1	50
	WN2-50	18.9±0.9											
	WB2-50	18.9±0.9											
	WV1-60	18.9±0.9											
	WN2-60	20.4±0.9											
	WB2-60	20.4±0.9											
SDA80-10	WN1-80	22.0±1.0	11.0	14.5	59.5	19.0	27.0	28.0	15.0	16.5	2.3	P-2 (本体) F-1 M-1 (ヘッド) E-1	25
	WB1-80	22.0±1.0											
	WN2-80	22.4±1.0											
	WB2-80	22.4±1.0											
SDA100-10	WN1-100	23.7±1.0	11.0	16.4	59.8	19.5	28.5	28.0	15.0	16.8	2.6	P-2 (本体) F-1 M-1 (ヘッド) E-1	25
	WB1-100	23.7±1.0											
	WN2-100	25.3±1.0											
	WB2-100	25.3±1.0											

注) 本製品の中には多少納期を要するものもあります。