

## ULTRA-FAST AND PRECISE PRESSURE TRANSMITTERS

## SERIES M5 HB

BANDWIDTH 50 KHZ / RESISTANT UP TO 200 °C / ACCURACY 0,1 %FS

The Series M5 pressure transmitters, with their 0...50 kHz dynamic range and M5 pressure connection, are optimized both for dynamic (i.e. fast pressure pulsations at close proximity) as well as static pressure measurements. The sensor design enables excellent media compatibility and supports measurements at temperatures of up to 200 °C without cooling adapters.

### Electronics

The circuitry for the Series M5 HB was specifically developed to take advantage of the high dynamic range of the M5 sensor head. The signal path remains entirely analog, although it is readjusted in real time by means of a high-precision digital compensation circuit. This ensures the full dynamic range of the sensor and the accuracy of the measurement signal are maintained across the entire 0...50 kHz bandwidth. With a temperature range of -40...+125 °C, the remote signal converter satisfies the exceptional demands associated with hostile environments; e.g., engine test benches. The sensor head alone (see the data sheet for the Series M5), i.e., without the remote signal converter, is available for those applications better served by a sensor with 80 mV output (@ 1 mA supply). Included with this configuration is a calibration card providing the user with actual test data taken from the sensor during factory calibration.

### Sensor technology

The Series M5 sensor incorporates a stable silicon sensor which is backside-soldered directly to a supporting element designed for excellent fluid dynamics. This construction eliminates the disadvantages of sealants, adhesives, separating membranes or capillary tubes in high temperature environments. The practically-flush connection to the measurement media is critical to the excellent dynamic range of 0...50 kHz. The micromechanical design delivers absolute measuring ranges of 3, 10 and 30 bar, overpressure protection of up to 5 times measuring range and effective isolation of mounting forces.

### Performance characteristics


- Sensor head capable of exposure to 200 °C
- Broad compensated temperature range, with a choice of either -20...125 °C or -40...180 °C
- Excellent dynamic response, up to 50 kHz (pulsation measurements)
- Insensitive to shock and vibration
- Extremely compact design, pressure connection: M5 x 0,5 fine thread
- Teflon FEP cable with IP67 ferrule, suitable for use on test benches
- Pressure ranges of 3 bar, 10 bar and 30 bar (absolute)



Series M5 HB



Sensor Head

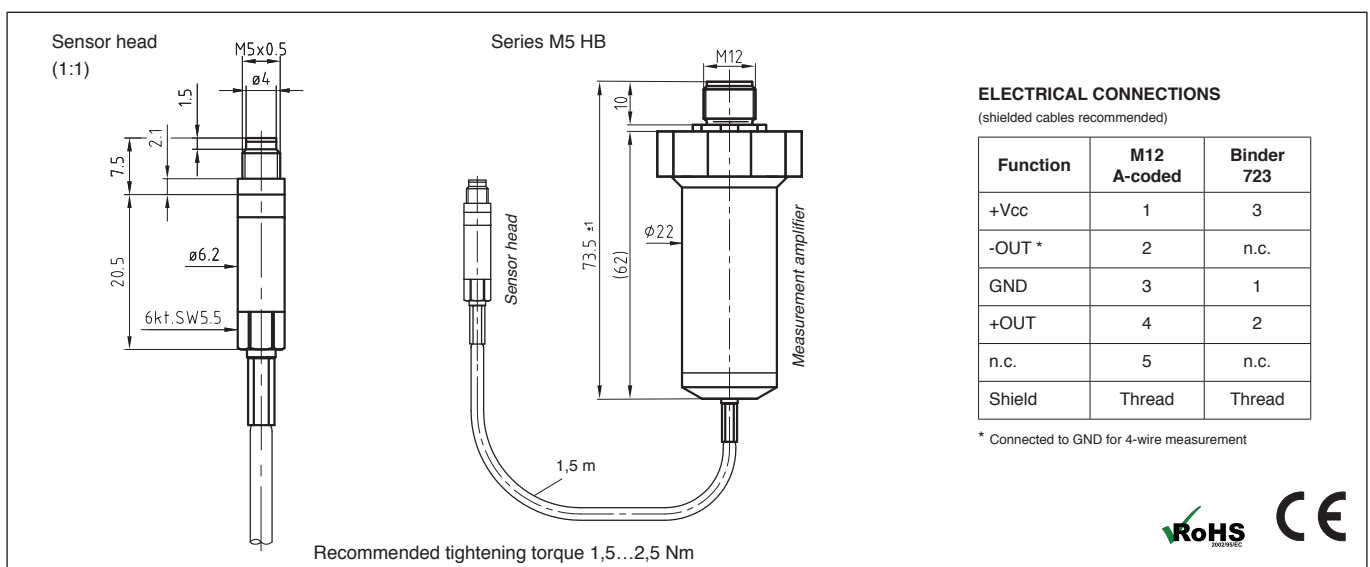



# KELLER

## Specifications

Pressure ranges, absolute	0...3	0...10	0...30	bar
PAA	0...3	0...10	0...30	bar
Overpressure / burst pressure	15	50	90	bar

Intermediate ranges show the overpressure resistance for the next biggest range listed.

PAA: Absolute pressure. Zero at vacuum.


Accuracy <sup>1)</sup>	± 0,1 %FS
Total Error Band <sup>2)</sup> (choice of)	± 0,5 %FS @ -20 to +125 °C sensor temperature ± 1,0 %FS @ -40 to +180 °C sensor temperature
Operating Temperature of Sensor Head	-50...+180 °C
Operating Temperature of Electronics	-40...+125 °C
Temp. Coefficients for Amplifier Electronics	± 0,01 %/K max.

<sup>1)</sup> Linearity (best straight line), hysteresis and repeatability

<sup>2)</sup> Accuracy and temperature error

Type	3- and 4-wire
Signal Output	0...10 V
Excitation	13...32 VDC
Load Resistance	> 5 kΩ
Limiting Frequency (-3 dB)	50 kHz min.
Power Consumption (off-load)	15 mA max.
Electrical Connections	M12 plug (5-pin), Binder 723 (5-pin)
Pressure Connection	Metric fine thread: M5 x 0,5 male
Cable (between sensor and electronics)	1,5 m FEP cable with Ø 2,9 mm shield
Insulation	> 10 MΩ @ 300 VDC
Materials in Contact with Media	Stainless steel AISI 316L (DIN 1.4404 / 1.4435), silicon, gold, external copper seal
Media Compatibility	Oil, fuels (diesel, petrol, etc.), gases, coolants, etc.
Protection	IP67 (with a suitable mating plug)
EMC	EN 61000-6-2 / EN 61000-6-3 / EN 61326-2-3
Options	<ul style="list-style-type: none"> <li>• Other pressure connections via thread adapter</li> <li>• Other compensated pressure and temperature ranges</li> </ul>

### Frequency response for the amplifier electronics of the Series M5 HB

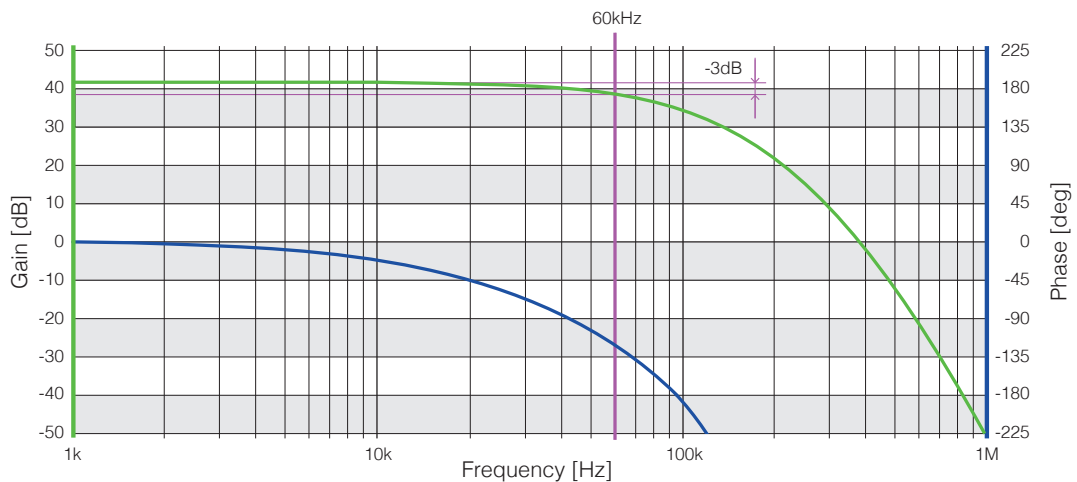

The 'HB' electronics designation stands for high bandwidth and is associated with the project name HummingBird.

Subject to change without notice

08/2014

KELLER AG für Druckmesstechnik  
KELLER Ges. für Druckmesstechnik mbH

St. Gallerstrasse 119  
Schwarzwaldstrasse 17

CH-8404 Winterthur  
D-79798 Jestetten

Tel. +41 (0)52 - 235 25 25  
Tel. +49 (0)7745 - 9214 - 0

Fax +41 (0)52 - 235 25 00  
Fax +49 (0)7745 - 9214 - 60

Company certified to ISO 9001

www.keller-druck.com