

Satellite Triplex Filter 950 - 1450 / 1650 - 2150 / 2500 - 3000 MHz

Rev. V3


Description

- MACOM Technology Solutions MAFL-010609 is a surface mount triplex filter unit designed for Satellite applications.

Features

- 75 Ohm
- SMT unit
- RoHS* Compliant
- SAT1 BPF 950-1450 MHz
- SAT2 BPF 1650-2150 MHz
- SAT3 BPF 2500-3000 MHz

Functional Schematic

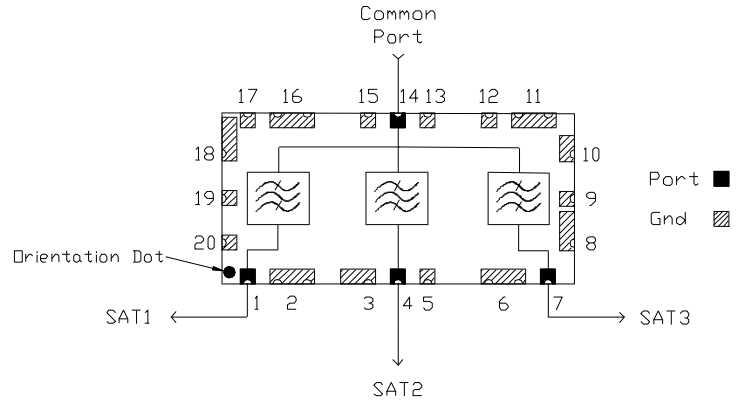

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$

Parameter	Units	Min	Typ	Max	Parameter	Units	Min	Typ	Max
SAT1 Band					Isolation				
Insertion Loss					SAT1 - SAT2 / SAT2 - SAT1				
950 - 1450 MHz	dB	-	1.5	3.0	950 - 1450 MHz	dB	36	45	-
Rejection					1650 - 2150 MHz	dB	30	35	-
500 - 875 MHz	dB	30	-	-	SAT1 - SAT3 / SAT3 - SAT1				
1550 MHz	dB	9	15	-	950 - 1450 MHz	dB	37	45	-
1630 - 2150 MHz	dB	30	40	-	2500 - 3000 MHz	dB	35	43	-
2400 - 4500 MHz	dB	35	45	-	SAT2 - SAT3 / SAT3 - SAT2				
SAT2 Band					1650 - 2150 MHz	dB	37	45	-
Insertion Loss					2500 - 3000 MHz	dB	35	43	-
1650 - 2150 MHz	dB	-	2.0	3.0	Parameter Pass Band Flatness				
Rejection					Units				
500 - 1470 MHz	dB	36	45	-	Max				
1550 MHz	dB	9	15	-	P-P over the band				
2400 - 2420 MHz	dB	27	40	-	SAT1 / SAT2 / SAT3				
2420 - 2440 MHz	dB	31	40	-	dB				
2440 - 4500 MHz	dB	35	45	-	3				
SAT3 Band					P-P, Any 40MHz band for the				
Insertion Loss					SAT1 / SAT2 / SAT3				
2500 - 3000 MHz	dB	-	2.75	3.0	dB				
Rejection					1				
500 - 875 MHz	dB	40	60	-	Parameter Group Delay Flatness				
950 - 2230 MHz	dB	37	45	-	Units				
2230 - 2240 MHz	dB	33	40	-	Max				
2240 - 2250 MHz	dB	29	40	-	SAT 1 / SAT 2 / SAT 3				
3500 - 4500 MHz	dB	20	25	-	P-P, over each of the bands				
Return Loss					nSec				
Common Port					25				
950 - 1450MHz	dB	10	11	-	SAT 1 / SAT 2 / SAT 3				
1650 - 2150 MHz	dB	10	11	-	P-P, over any 40MHz band				
2500 - 3000 MHz	dB	10	11	-	nSec				
SAT1 Port					12				
950 - 1450 MHz	dB	10	11	-	Pin Configuration				
SAT 2 Port					Function				
1650 - 2150 MHz	dB	10	11	-	Pin Number				
SAT 3 Port					SAT1 Port				
2500 - 3000 MHz	dB	10	11	-	1				
Common Port					SAT2 Port				
Ground					4				
Ground					SAT3 Port				
Ground					7				
Ground					Common Port				
Ground					14				
Ground					Ground				
Ground					2, 3, 5, 6, 8-13, 15-20				

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC

* Temperature Data available upon request

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.


MAFL-010609



Satellite Triplex Filter
950 - 1450 / 1650 - 2150 / 2500 - 3000 MHz

Rev. V3

Outline Drawing:

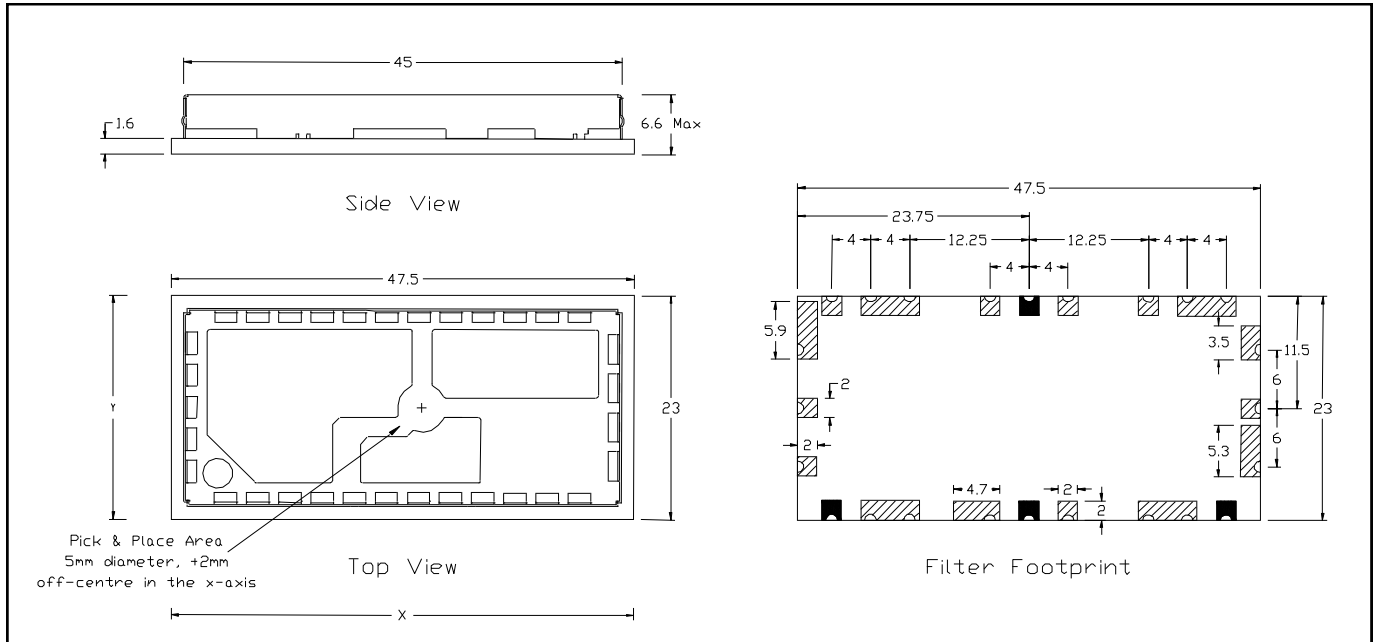


Dimensions in mm. Tolerance: $.x \pm 0.1$ unless otherwise noted

Recommended Maximum Ratings

Parameter	Value
Storage Temperature	-25°C to +70°C
Operating Temperature	0°C to +70°C

Recommended PCB Configuration

- Track dimension = 1.15mm
- Gap dimension = 1.3mm
- It is not recommended to run tracks under the filter unless they are greater than 1.6mm below the base.
- RF shield should be kept a minimum of 10mm above the filter

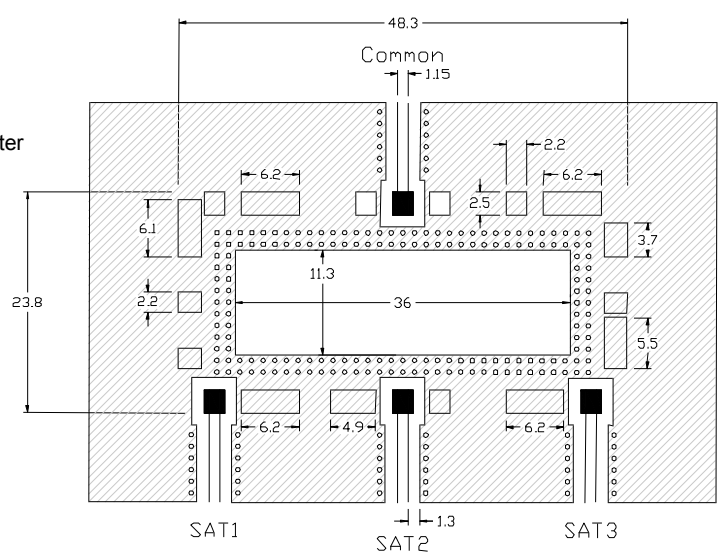

NOTE: Substrate is 1.6mm thick FR4

2 Dimensions in mm. Tolerance: $.x \pm 0.1$ unless otherwise noted







MA-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
<https://www.macom.com/support>

Satellite Triplex Filter 950 - 1450 / 1650 - 2150 / 2500 - 3000 MHz

Rev. V3





Typical Performance Curves at +25°C

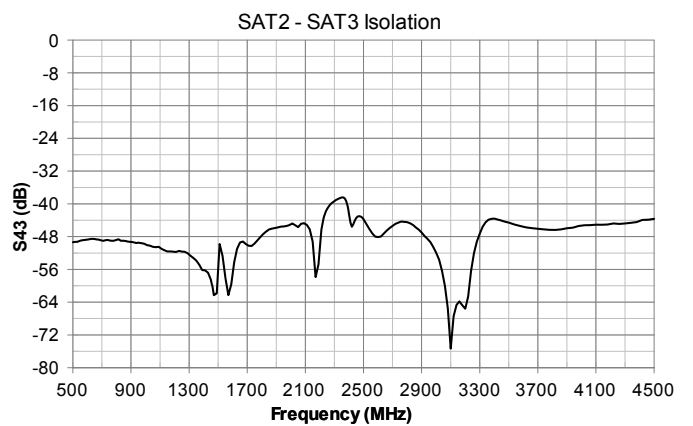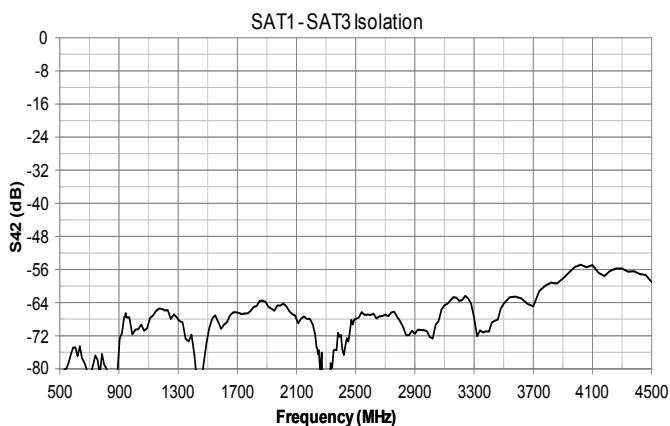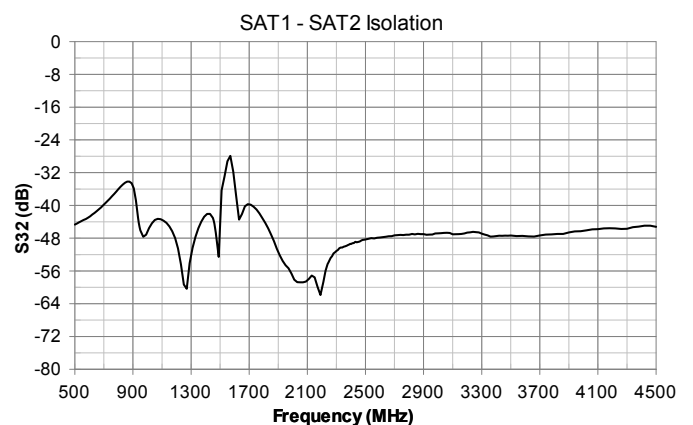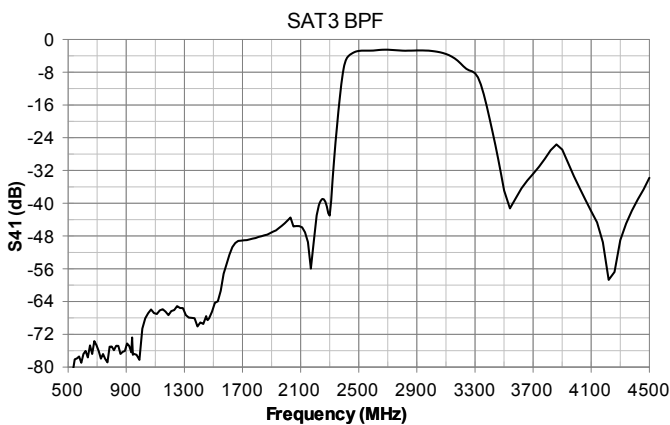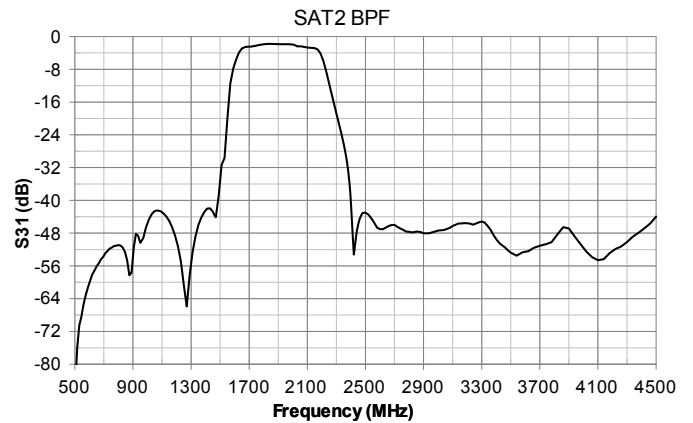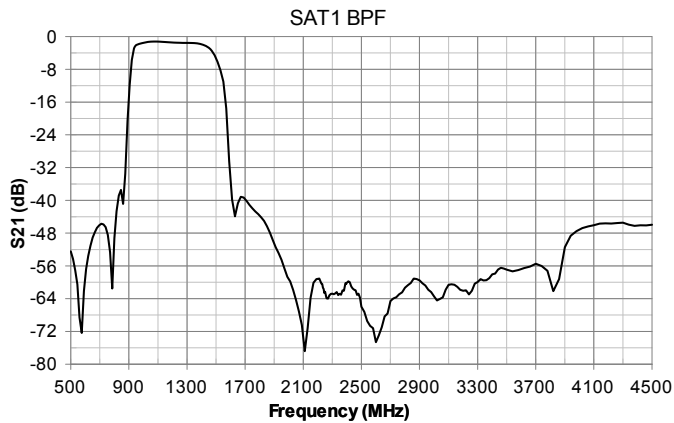

Satellite Triplex Filter 950 - 1450 / 1650 - 2150 / 2500 - 3000 MHz

Rev. V3




Typical Performance Curves at +25°C

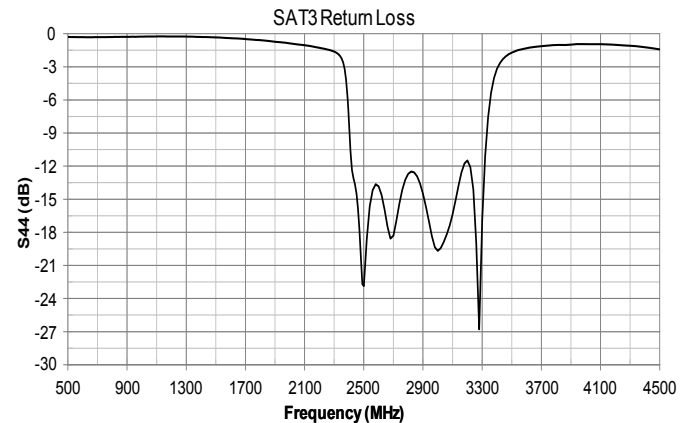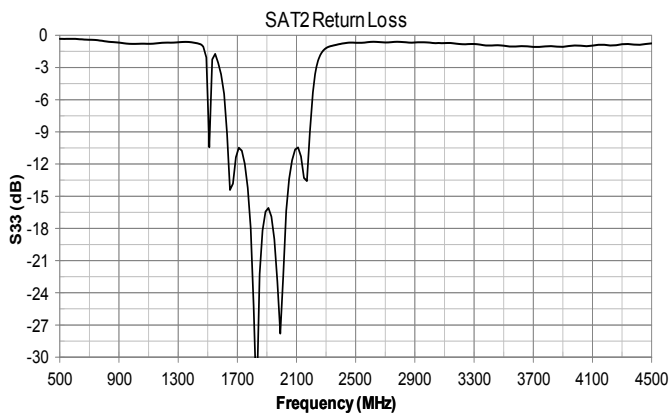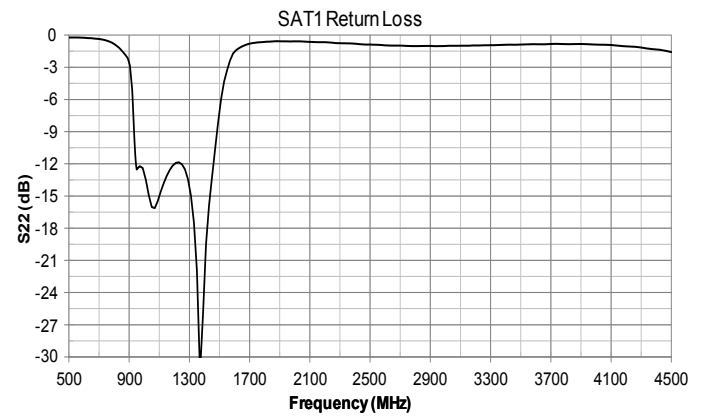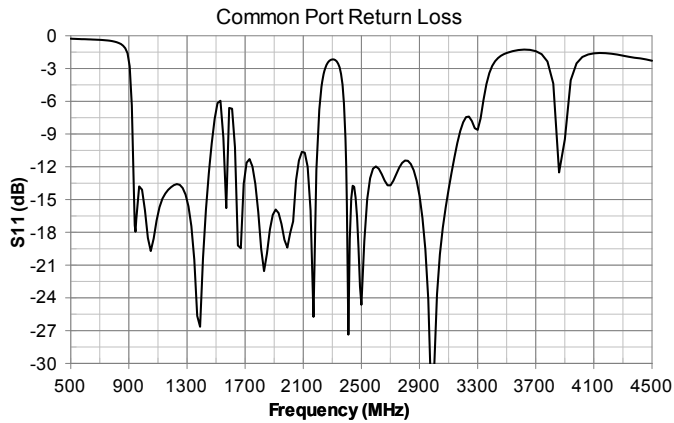

Satellite Triplex Filter 950 - 1450 / 1650 - 2150 / 2500 - 3000 MHz

Rev. V3

Typical Performance Curves at +25°C

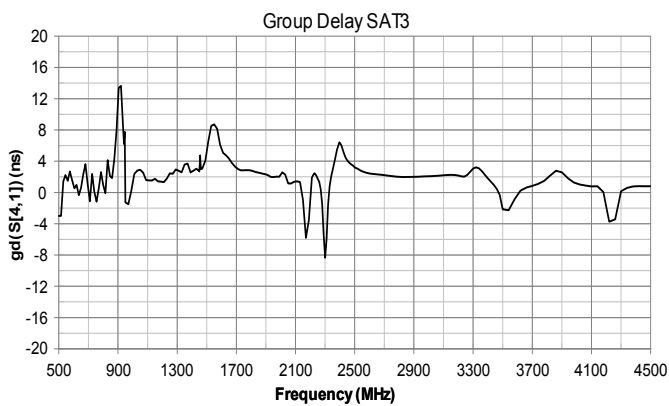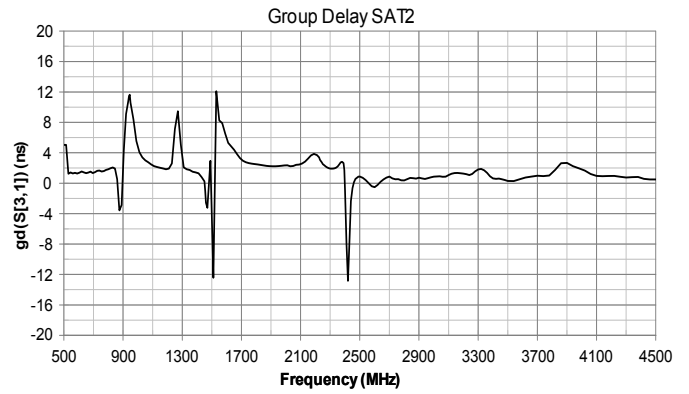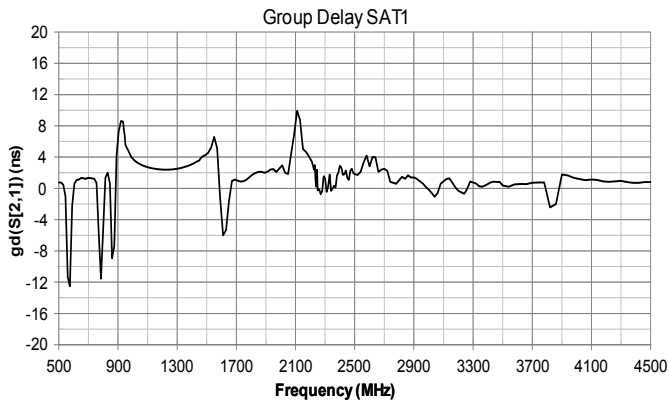

Satellite Triplex Filter 950 - 1450 / 1650 - 2150 / 2500 - 3000 MHz


Rev. V3

Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	200
Reel Size	mm	330
Tape Width	mm	72.0
Pitch	mm	28.0
Ao	mm	23.3
Bo	mm	47.8
Ko	mm	6.8
Orientation	-	F30
Reference Application Note ANI-019 for orientation		

Ordering Information

Part Number	Package
MAFL-010609	Tape & Reel

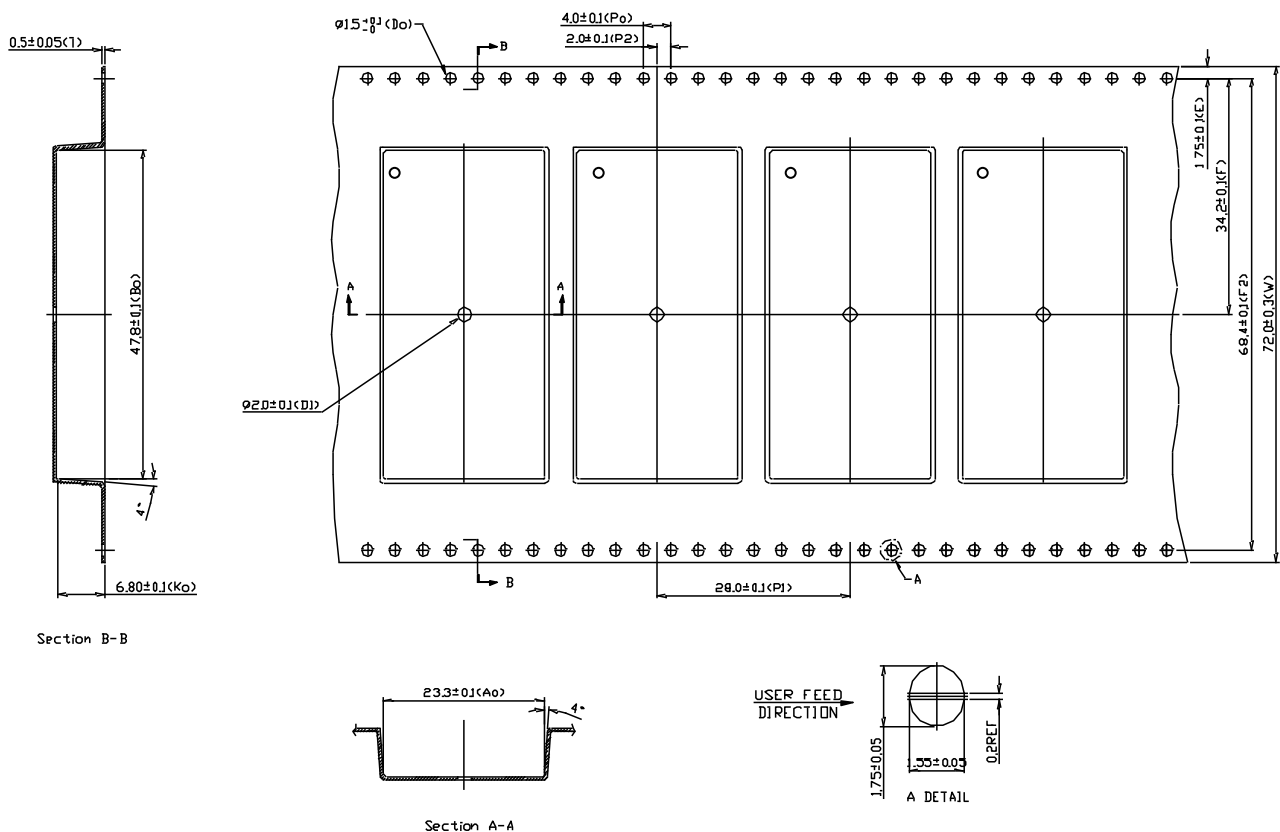

Satellite Triplex Filter

950 - 1450 / 1650 - 2150 / 2500 - 3000 MHz

Rev. V3

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.