

2 Way 0° Power Divider 40-1000MHz

MACPES0045
V2

Features

- Surface Mount
- 2 Way 0 degree
- Available on tape & reel
- Excellent isolation

Description


M/A-COM's MACPES0045 is 2 way 0 degree power divider in a low cost, surface mount package. Ideally suited for high volume CATV & VSAT applications. Two 0603 1pf capacitors and one 160 Ohm resistor are required with this part.




Pin Configuration

Pin No.	Function
1	Output 1
3	Ground
4	Input
2&5	2 x External shunt 1pf Cap, short pin 2 & 5 together.
6	Output 2

Schematic

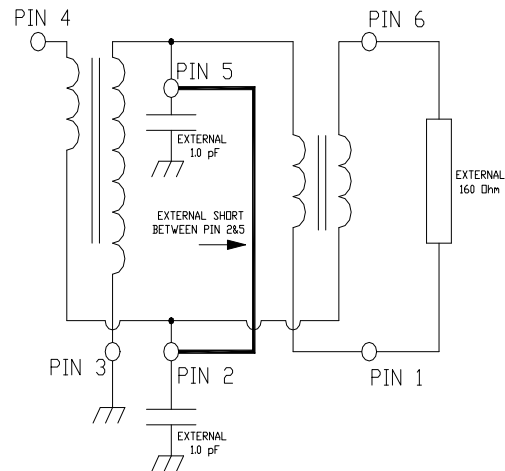

Case Style: SM-150

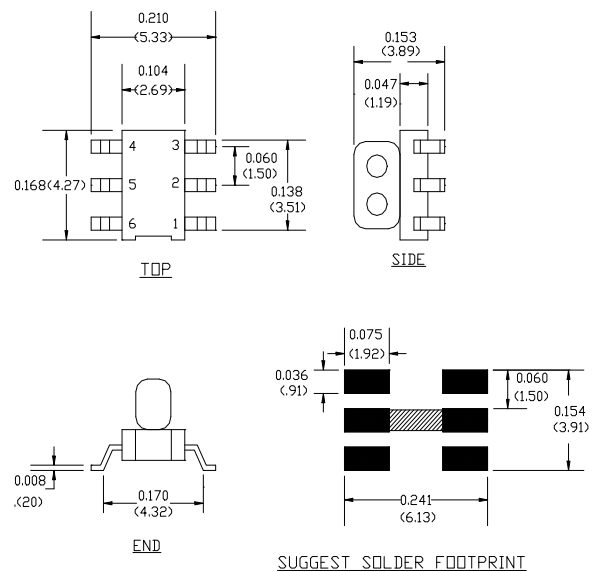

Ordering Information

Part Number	Package
MACPES0045	2000 piece reel

Dimensions in inches [mm] Tolerance: .xx ± .02, .xxx ± .010

Note: Reference Application Note **M513** for reel size information.

2 Way 0° Power Divider 40-1000MHz

MACPES0045
V2

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$

Parameter	Test Conditions	Units	Min	Typ	Max
Insertion Loss (Above 3dB)	40 - 700 MHz	dB	-	0.3	0.8
	700 - 850 MHz	dB	-	0.5	1.0
	850 - 870 MHz	dB	-	0.9	1.2
	870 - 1000 MHz	dB	-	1.0	1.4
Isolation	40 - 1000 MHz	dB	18	25	-
Amplitude Unbalance	40 - 1000 MHz	dB	-	0.2	0.5
Phase Unbalance	40 - 1000 MHz	°	-	0.5°	5°
Input Return Loss	40 - 700 MHz	dB	-	25	15
	700 - 1000 MHz	dB	-	18	12
Output Return Loss 1	40 - 440 MHz	dB	-	20	15
	440 - 700 MHz	dB	-	16	12
	700 - 1000 MHz	dB	-	13	10
Output Return Loss 2	40 - 440 MHz	dB	-	16	13
	440 - 700 MHz	dB	-	18	15
	700 - 1000 MHz	dB	-	14	11


Note: Specification subject to change without notice

Absolute Maximum Ratings ^{1,2}

Parameter	Absolute Maximum
RF Power	1 Watt
Internal Load Dissipation	0.125 Watt
Storage Temperature	-40°C to +85°C
Operating Temperature	-40°C to +80°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.

Recommended PCB Configuration

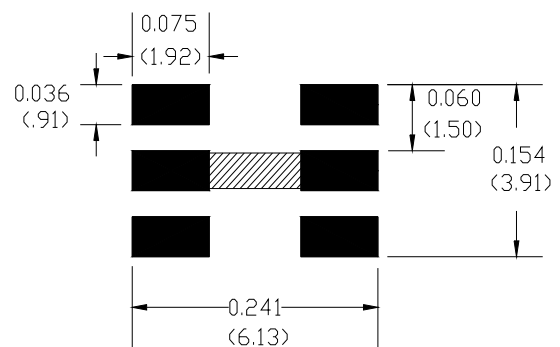


2 Way 0° Power Divider
40-1000MHz


MACPES0045
V2

Typical Performance Curves @ $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$


Insertion Loss Port 1

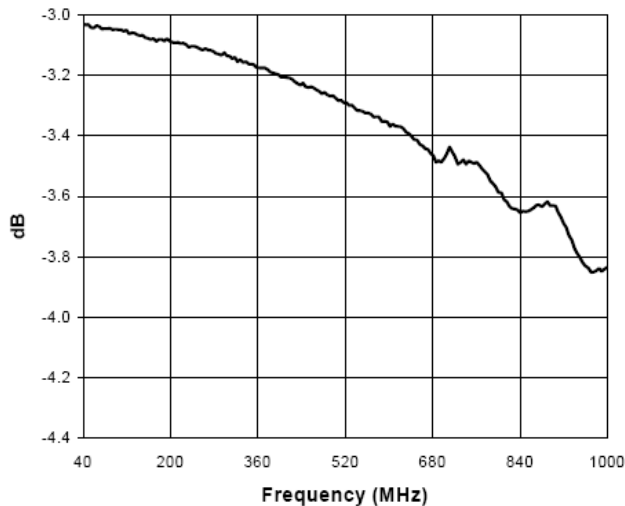


Insertion Loss Port 2

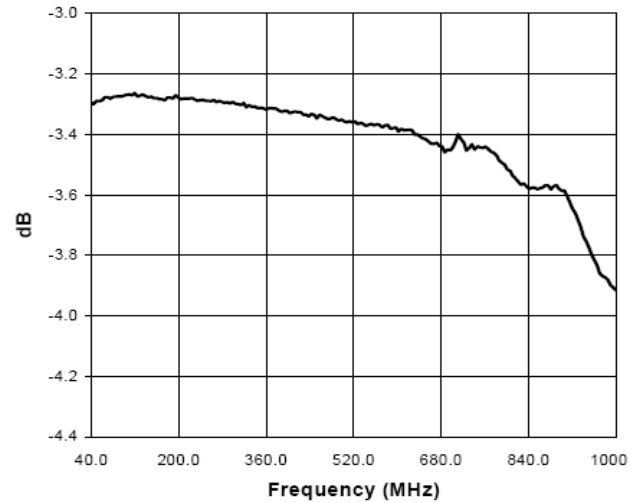

Amplitude Unbalance

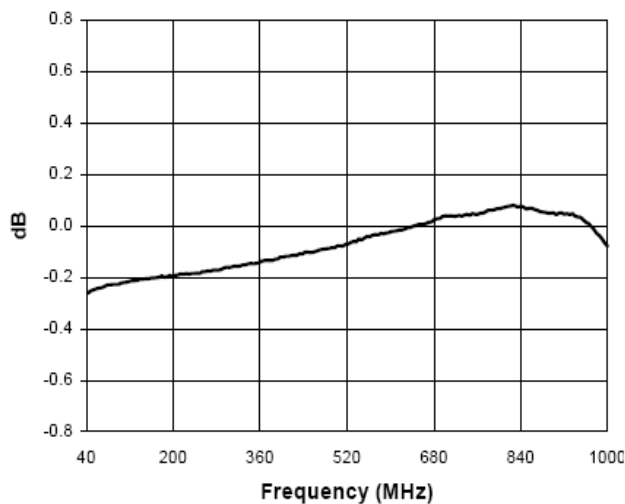

Phase Unbalance

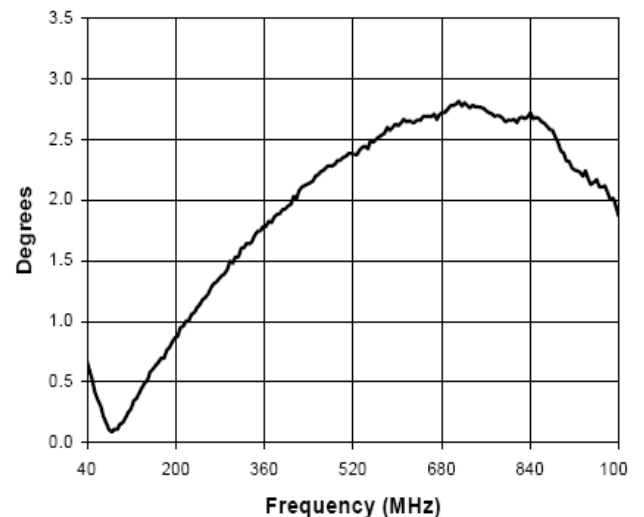

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
• **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.


M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

2 Way 0° Power Divider
40-1000MHz


MACPES0045
V2

Typical Performance Curves @ $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$


Isolation

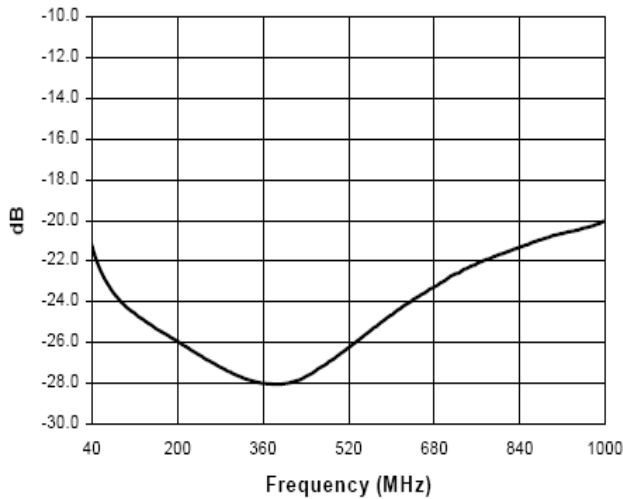

Input Return Loss

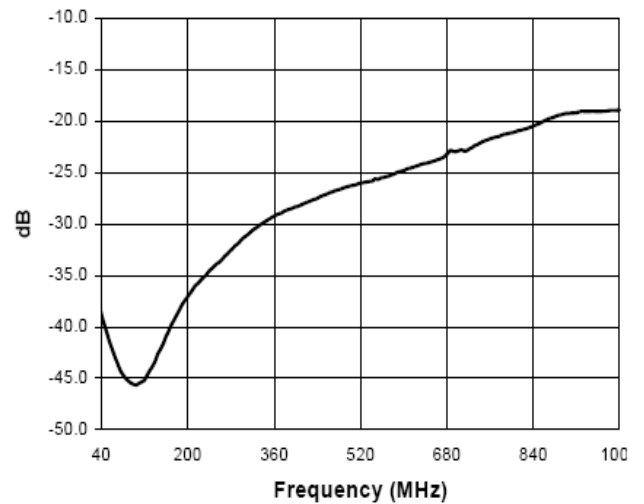

Output Return Loss 1

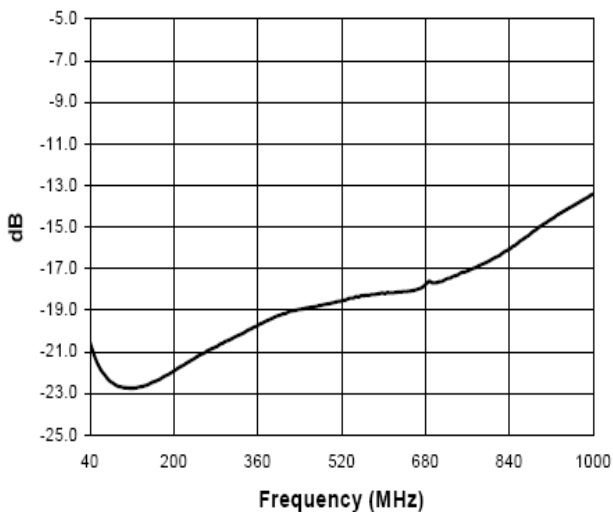

Output Return Loss 2

