



Features

- Surface Mount
- Typical Coupling +10dB
- 260°C compatible
- RoHS Compliant
- Available on Tape and Reel
- Pb Free

Description

MACPCT0040 is a 10dB broadband Coupler in a low cost, surface mount package. It offers low loss, good isolation, good input/output matching and exceptional coupling repeatability. Ideally suited for high volume CATV/Broadband applications.

Functional Schematic

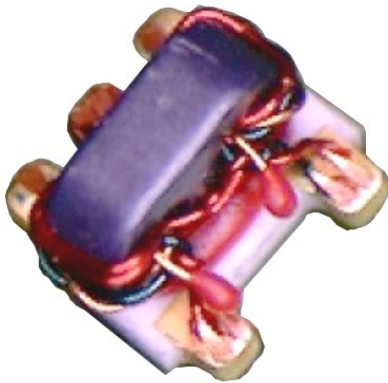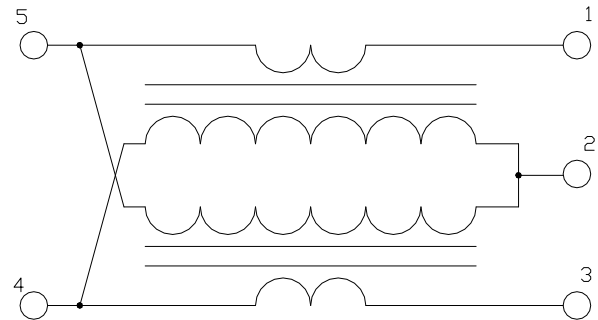

Ordering Information

Part Number	Package
MACPCT0040TR	2000 piece reel

Pin Configuration

Pin No.	Function
1	Input
2	Ground
3	Coupled
4	Isolated (external 50 Ohms termination)
5	Output

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$ ¹

Parameter	Test Conditions	Units	Min	Typ	Max
Coupling	5 - 500 MHz	dB	-	9.95	10 ± 0.4
Coupling	500 - 1000 MHz	dB	-	9.9	10 ± 0.6
Main Line Loss	5—500MHz	dB	-	1.1	1.4
Main Line Loss	500 - 1000 MHz	dB	-	1.3	1.7
Directivity	5 - 50MHz	dB	20	22	-
Directivity	50—500MHz	dB	18	21	-
Directivity	500 - 1000 MHz	dB	13	18	-
Input Return Loss	5 - 1000 MHz	dB	16	21	-
Output Return Loss	5 - 50MHz	dB	20	30	-
Output Return Loss	50—500MHz	dB	28	40	-
Output Return Loss	500 - 1000 MHz	dB	20	35	-
Coupling Return Loss	5 - 500 MHz	dB	16	20	-
Coupling Return Loss	500 - 1000 MHz	dB	13	18	-
Isolation Return Loss	5 - 50MHz	dB	20	30	-
Isolation Return Loss	50—500MHz	dB	25	43	-
Isolation Return Loss	500 - 1000 MHz	dB	16	25	-


Absolute Maximum Ratings

Parameter	Absolute Maximum
Max Input Power	250mW
DC current	30mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C


1. Full Temperature Plots Available on request.

Typical Performance Curves $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$


Coupling

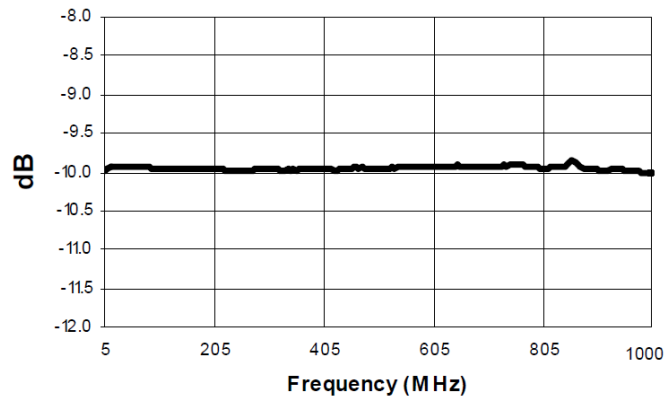


Main Line Loss

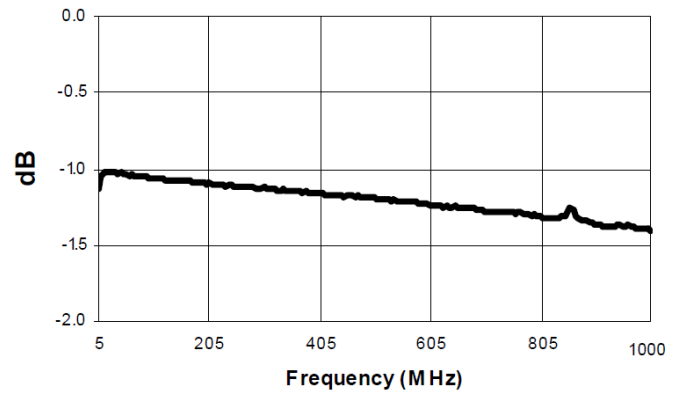


Directivity

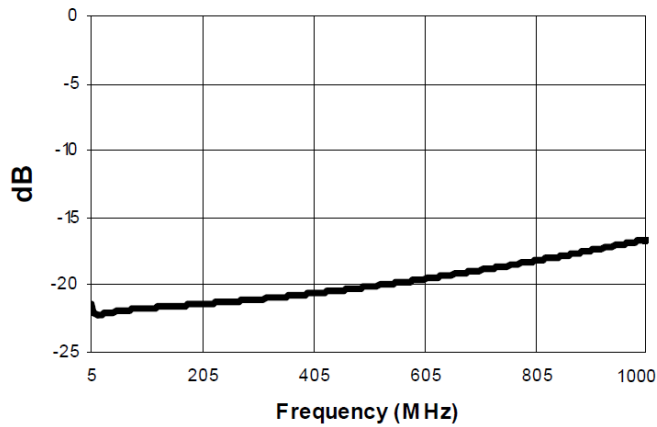


Input Return Loss

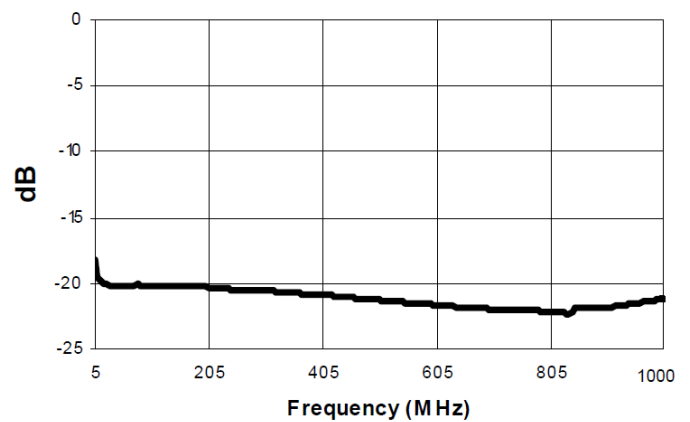


Output Return Loss

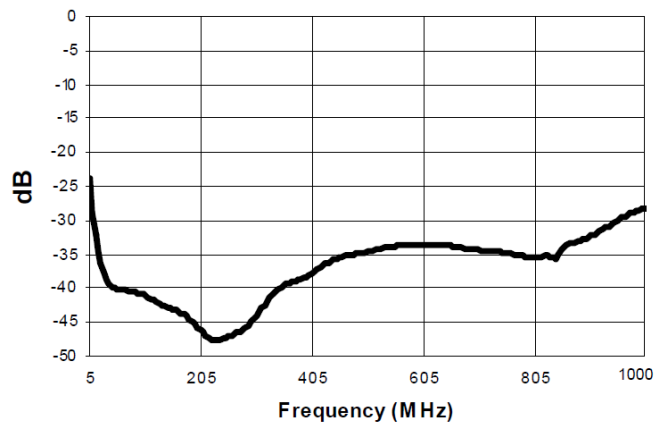

Coupling Return Loss

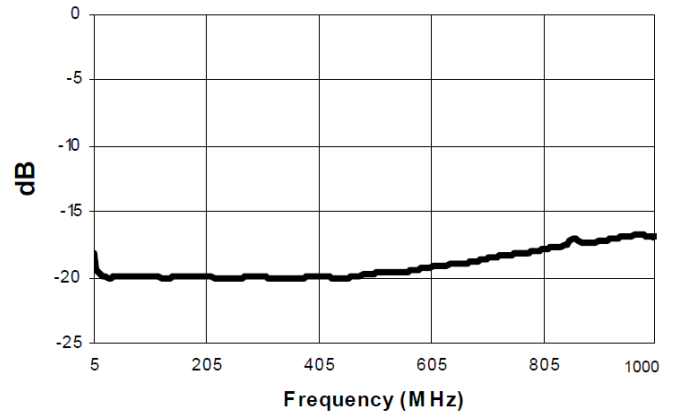

Dimensions

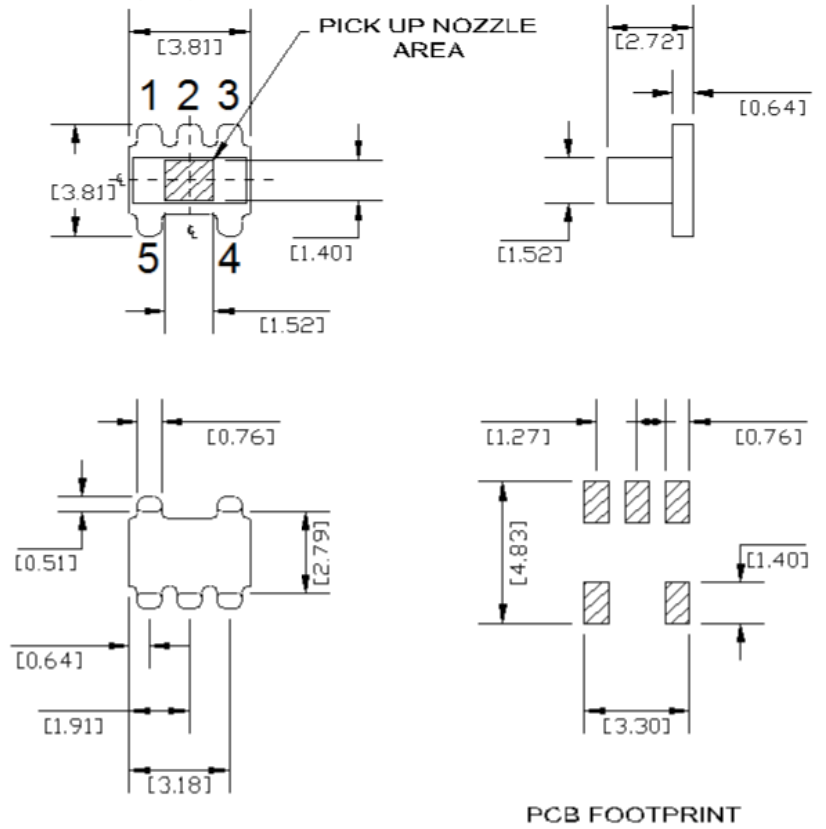

1. Dimensions in mm
2. Tolerance: ± 0.2 mm unless otherwise noted
3. Model number and lot code are printed on reel
4. Lead Finish: Gold

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.