


## Features

- SMT unit
- 3 Way 0 Degree Power Divider
- Excellent Temperature Stability
- Tape and Reel


## Description

M/A-COM Technology Solutions MAPDCT0017 is a 3 Way 0° Power Divider in a low cost, surface mount package. Ideally suited for high volume CATV & VSAT applications. No external components are required with this product

## Schematic

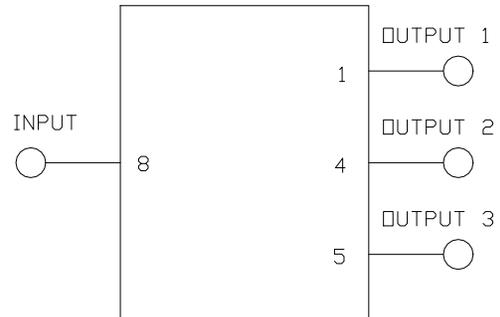

## Component Dimensions:

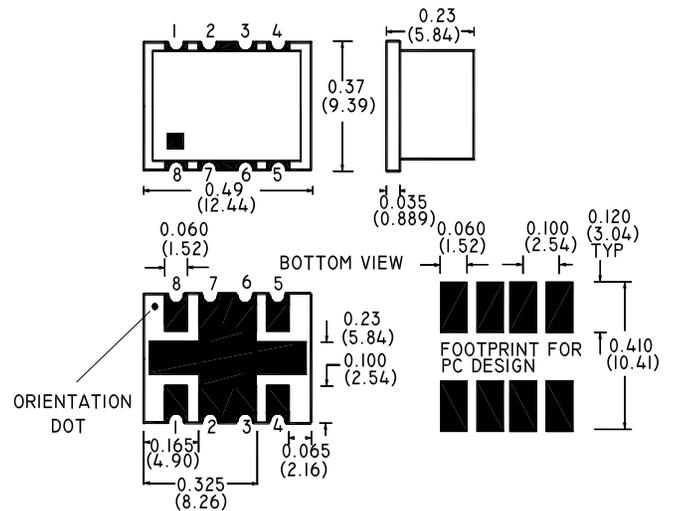

Dimensions in inches [mm] Tolerance: .xx ± .02, .xxx ± .010

## Pin Configuration

Function	Pin Number
Input	8
Output 1	1
Output 2	4
Output 3	5
Ground	2, 3, 6, 7

1 \* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

## Broadband CATV 3 way 0 Degree Power Divider

Rev. V3

**Electrical Specifications:  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 75\Omega$**

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Frequency Range: 46-1200 MHz	MHz				
Insertion Loss 1 (pin 8 to 1) * Ref value -4.77dB	46 – 870	dB	-	1.23	1.50
	870 – 1002	dB	-	1.50	1.80
	1002 - 1200	dB	-	2.23	3.20
Insertion Loss 2 (pin 8 to 4) * Ref value -4.77dB	46 – 870	dB	-	1.00	1.30
	870 – 1002	dB	-	1.20	1.50
	1002 - 1200	dB	-	2.00	2.80
Insertion Loss 3 (pin 8 to 5) * Ref value -4.77dB	46 – 870	dB	-	1.50	1.80
	870 – 1002	dB	-	1.80	2.20
	1002 - 1200	dB	-	2.80	3.30
Input Return Loss *	46 – 405	dB	20	25	-
	405 – 1002	dB	17.5	20	-
	1002 – 1200	dB	11	18	-
Output return Loss 1 & 2* (Pin 1, 4)	46 - 1200	dB	20	25	-
Output return Loss 3 * (Pin 5)	46 – 740	dB	20	25	-
	740 – 1002	dB	17	20	-
	1002 -1200	dB	14	18	-
Isolation between outputs	46 - 1002	dB	20	25	-
	1002 - 1200	dB	18	24	-
Amplitude Unbalance Output 1 to Output 2 (pin 1, 4)	46 - 1002	dB	-	0.3	0.5
Amplitude Unbalance Output 1 to Output 3 (pin 1, 5)	46 - 1002	dB	-	-0.3	-0.5
Phase Unbalance	50 – 1200	°	-4.0	3.0	4.0

\* Monitored during production tune/test

### Recommended Maximum Ratings <sup>1,2</sup>







Parameter	Value
RF Power	250 mW
DC Current	30 mA
Operating/Storage Temperature	-40° C to +85° C

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM Technology Solutions does not recommend sustained operation near these survivability limits.


## Broadband CATV 3 way 0 Degree Power Divider

Rev. V3

Typical Performance Curves:  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 75\Omega$

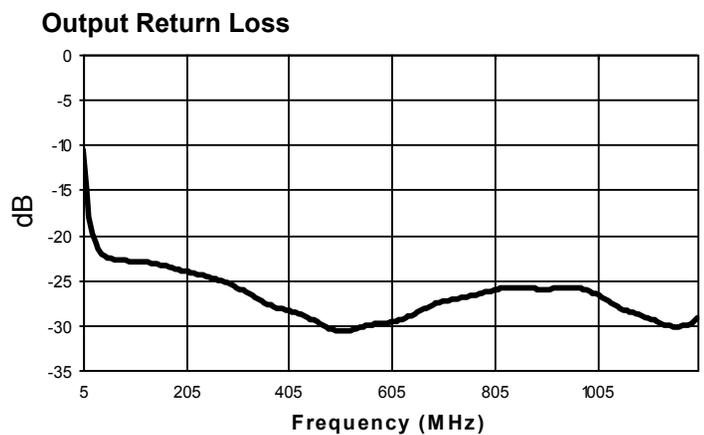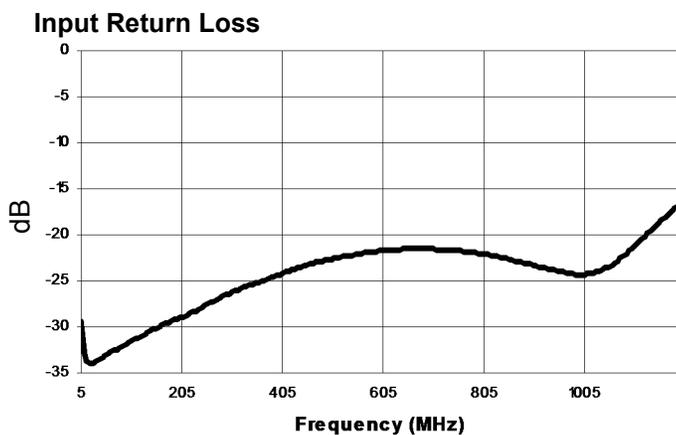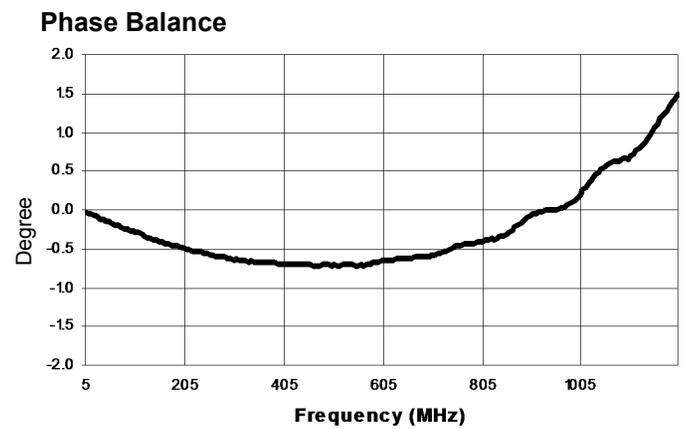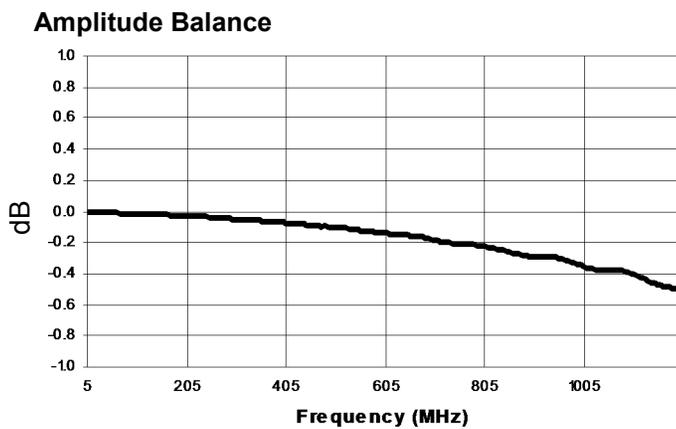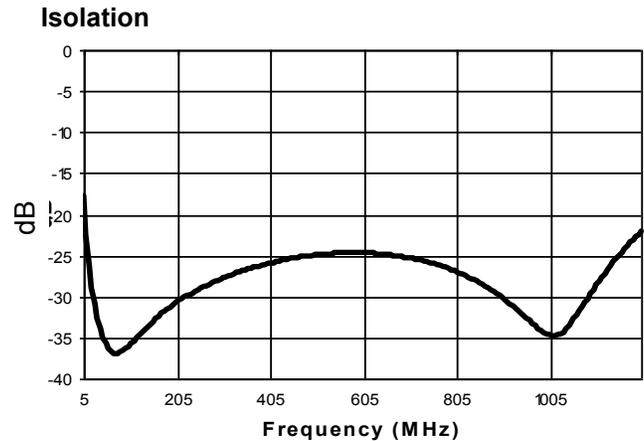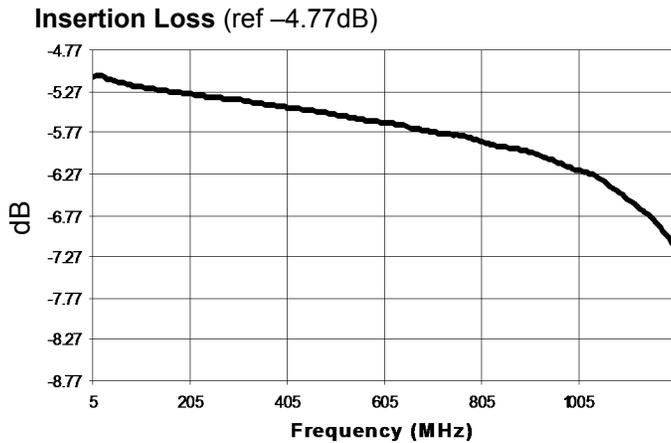

## Tape Specification:

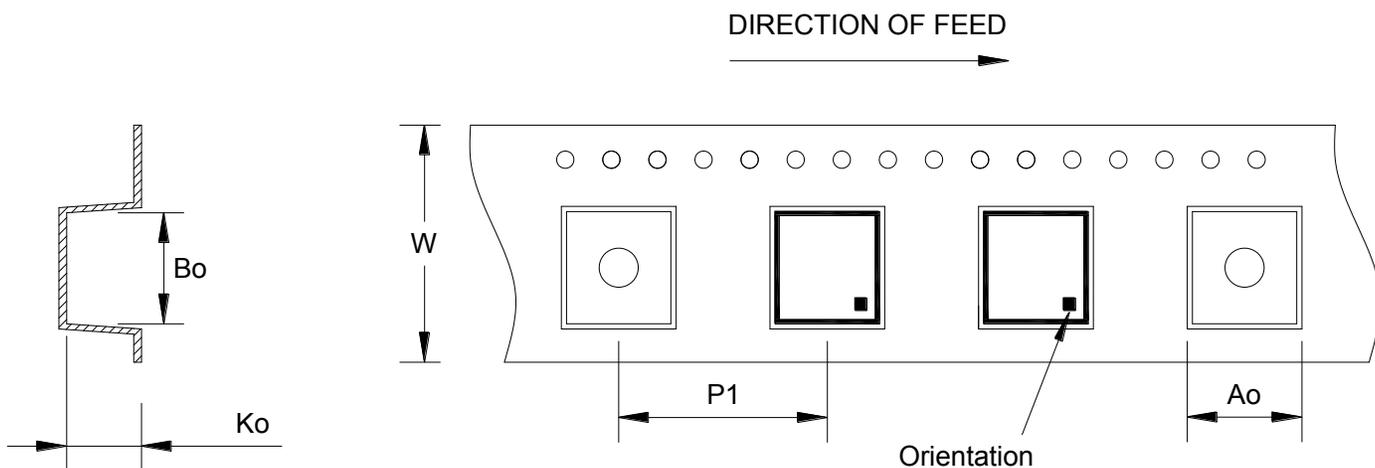

Item	Dimension
Ao	10.26mm +/-0.1mm
Bo	13.46mm +/-0.1mm
Ko	6.10mm +/-0.1mm
W	24.00mm +/-0.3mm
P1	16.00mm +/-0.1mm

## Ordering Information

Part Number	Package
MAPDCT0017	500

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.