



Micro Communications, Inc.

Band II Dipole Antenna

Side-Mount Vertical Polarization

For Extreme Weather Conditions

Model: AT12-512



made by RYMSA

Electrical Specifications

Frequency range	87.5-108 MHz		
Peak gain	1.13 dB (ref. $\lambda/2$ dipole, free space) 3.08 dB (ref. $\lambda/2$ dipole, with pole)		
3 dB beam width	E-plane: 75°	H-plane: 169°	
Polarization	Vertical		
Impedance	50 Ohm		
VSWR	≤ 1.2:1		
Maximum power handling	2.5 KW	5 KW	7 KW
Connector type	DIN 7/16	EIA 7/8"	DIN 13/30
Pressurization	Non pressurized	Gas barrier on input connector	





Mechanical & Environmental Specifications

Materials	Dipole Feed points radome	Hot dip galvanized steel Fiberglass
Dimensions (W x D x H)	200 x 1105 x 1440 mm	
Maximum wind speed	200 Km/h	
Wind load	350 N (@160 Km/h)	
Weight	30 Kg	
Clamp type	To Ø 80 – 115 mm pipe	
Vertical spacing	0.8 λ – 0.9 λ typical	
Grounding	DC grounded	
Temperature range	-40°C to +80°C	
Humidity	100%	

Antenna System Characteristics

Number of Bays	Number ant. per bay	Peak gain (dBd)	Weight (Kg)	Wind load (@160 Km/h)	System height (mm)
1	1	3.1	30	0.4 KN	1440
2	1	6.1	60	0.7 KN	4049
4	1	9.1	120	1.4 KN	9266
6	1	10.9	180	2.1 KN	14483
8	1	12.1	240	2.8 KN	19701
10	1	13.1	300	3.5 KN	24917
12	1	13.9	360	4.2 KN	30135

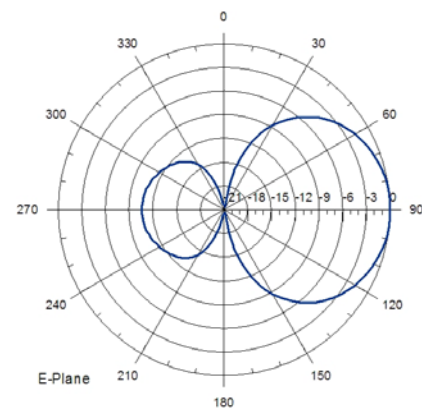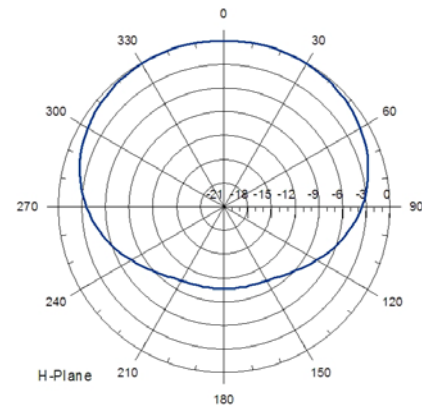

NOTES:

- Radiation patterns included and antenna system peak gain values calculated with pole
- Null fill, beam tilt, harness & feeder losses NOT INCLUDED
- Wind load & weight figures without considering cables, splitters & hardware.



Micro Communications, Inc.

Micro Communications, Inc - A Mega Industries Company
 28 Sanford Dr. Gorham Maine 04038 Phone: 207.854.1700 Fax: 207.854.2287
 Email: sales@megaind.com Web: www.megaind.com