


Toll Free: 800-941-1112 • Fax: 888-941-1112
 Phone: 786-336-5780 • Fax: 786-336-5790
 Sales@miamibreaker.com / lg@miamibreaker.com



GMC-12 GMC-32 GMC-85 GMC-100 GMC-300 GMC-800

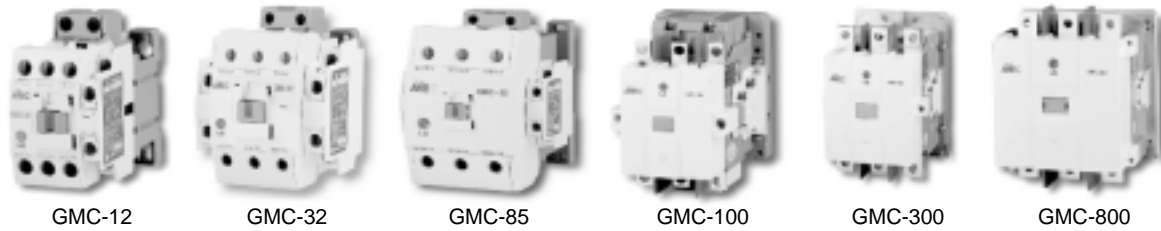

GTK-22 GTK-85 GTK-150

Contactor

Thermal Overload Relays

Contactor Type	Lighting Load (Amp.)	3 PH Motor Load (HP)			Auxilliary Contact		Price
		230V	460V	575V	NO	NC	
GMC-9	20	2	5	7 1/2	1	1	\$34
GMC-12	25	3	7 1/2	10	1	1	\$41
GMC-18	30	5	10	15	1	1	\$48
GMC-22	32	7 1/2	10	15	1	1	\$52
GMC-32	45	10	20	20	2	2	\$74
GMC-40	50	10	25	25	2	2	\$88
GMC-50	75	15	30	30	2	2	\$108
GMC-65	80	20	40	40	2	2	\$127
GMC-75	90	25	50	50	2	2	\$138
GMC-85	100	30	50	50	2	2	\$161
GMC-100	130	30	60	60	2	2	\$200
GMC-125	160	40	75	75	2	2	\$224
GMC-150	210	50	100	100	2	2	\$280
GMC-180	230	60	125	125	2	2	\$380
GMC-220	275	75	150	150	2	2	\$488
GMC-300	350	100	200	200	2	2	\$640
GMC-400	450	150	300	300	2	2	\$788
GMC-600	660	200	400	400	2	2	\$2,000
GMC-800	840	250	500	500	2	2	\$2,752

Applicable Type	Auxiliary Contact		PRICE
	NO	NC	
Differential			
GTK-22	1	1	\$38
GTK-40	1	1	\$52
GTK-85	1	1	\$102
GTK-100	1	1	\$140
GTK-150	1	1	\$216
GTK-220	1	1	\$270
GTK-400	1	1	\$345
GTK-600	1	1	\$539

Nominal Rating	Setting Range		Type
	min. (A)	max. (A)	
0.14	0.1	0.16	3 Pole & Differential
0.21	0.16	0.25	
0.33	0.25	0.4	
0.52	0.4	0.63	
0.82	0.63	1	
1.3	1	1.6	
2.1	1.6	2.5	
3.3	2.5	4	
5	4	6	
6.5	5	8	
7.5	6	9	
8.5	7	10	
11	9	13	
15	12	18	
19	16	22	
22	18	26	
30	24	36	
34	28	40	
41	34	50 (2)	
42	34	50 (1)	
48	39	57 (2)	
55	45	65 (1)	
56	43	65 (2)	
65	54	75 (1)	
67	54	80 (2)	
74	6	85 (1)	
80	65	100	
107	85	125	
130	100	150 (3)	
130	100	160	
150	120	180	
200	160	240	
250	200	300	
350	260	400	
500	400	600	
660	520	800	

Note: (1) Nominal ratings are applied to type GTK-85 only.
 (2) Nominal ratings are applied to type GTK-100 and GTK-150 only
 (3) Nominal ratings are applied to type GTK-150 only

OPTIONAL ACCESSORIES

Auxiliary contact blocks

Top mounting

Type	Pole	Contact Configuration	Combined Contactors
AU-2	2	2NO 1NO+1NC	GMC-9 to GMC-85
AU-4	4	4NO 3NO+1NC 2NO+2NC 1NO+3NC 4NC	GMC-9 to GMC-85

Side on mounting

Type	Pole	Contact Configuration	Combined Contactors
AU-1	2	1NO+1NC	GMC-9 to GMC-85
AU-100	2	1NO+1NC	GMC-100 to GMC-800

Mechanical interlock unit



Type	Applied Contactors
AR-1	GMC-9 to GMC-85
AR-100	GMC-100 to GMC-150
AR-180	GMC-180 to GMC-400

Mechanical latch unit



Type	Applied Contactors
AL-9	GMC-9 to 40
AL-50	GMC-50 to 85
AL-100	GMC-100, 125
AL-150	GMC-150
AL-220	GMC-180, 220
AL-400	GMC-300, 400

Surge absorber unit



Type	Coil Voltage
SA-1	AC 24-48V
SA-2	AC 100-125V
SA-3	AC 200-240V
SA-4	DC 24-48V
SA-5	DC 100-125V
SA-6	DC 200-240V