

48 V_{DC} ICAO Low-intensity, Type B Obstacle Light
48 V_{DC} FAA Type L-810 Low Intensity Obstacle Light

Key features

- Based on LED-tehcology
- Extremely reliable - long lifetime
- Very low power consumption
- 48 V DC nominal supply voltage
- Intensity 36 cd typical
- Stabilised light output
- Easy to install
- Absolutely no RF-radiations

Benefits

- Long maintenance intervals
- Low energy cost
- Supply power voltage variations do not affect to light output
- Very low total lifetime costs
- Comes with five (5) years warranty

Specifications met

- ICAO International Standards and Recommended Practices:
Aerodromes - Annex 14 Volume 1, 5th Edition, July 2009,
Chapter 6: Low-intensity, Type B Fixed Obstacle Light
- FAA Advisory Circular 150/5345-43F 09/12/06 L-810 Light Unit

Optical characteristics

- Intensity better than 32,5 cd (36 cd typical)
- Colour aviation red
- Horizontal radiation pattern 360°
- Vertical radiation pattern 50°
- LED supply current stabilised by constant current generator
- Light output degradation less than 30% after 100.000 h of operation

Electrical characteristics

- LEDs in several separate groups
- Nominal operating voltage 48 V_{DC}
- Power consumption less than 8 W
- Operating voltage range 45 to 58 V_{DC}
- Two-stage over-voltage protection

Mechanical characteristics


- Yellow ABS body
- Weather protection to IP 30
- Operating temperature range -55°C ... +55°C
- Height 110 mm, diameter 100 mm, weight 0.1 kg

Ordering Code: **Obelux 32-48-E27**

Made in Finland



Obelux 32-48-E27

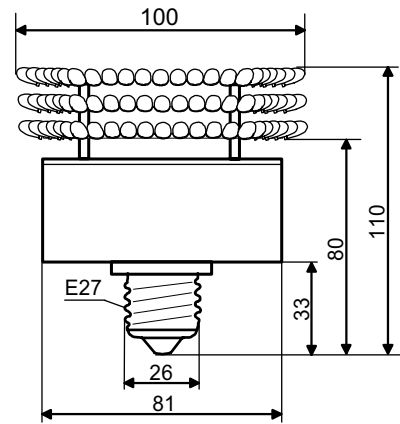

	OPERATING VOLTAGE 48 V DC
	CAUTION ! LED RADIATION DO NOT STARE INTO LED BEAM OR VIEW DIRECTLY WITH OPTICAL INSTRUMENTS. CLASS 2A LED PRODUCT

Technical information in this document is subject to change without notice. Copyright © Obelux Oy 2010

Obelux Oy
Kutomotie 6 B
FIN-00380 Helsinki
Finland

tel: +358 50 1999
fax: +358 9 621 5518
internet: www.obelux.fi
e-mail: info@obelux.fi