



Board to Board Connector

Technical Specs

*Pitch: 0.4 mm

Pins: 10 ~ 80

Types: SMT D/R

Height:

0.8mm/0.9mm/1.5mm and 2.0mm are available

**Pitch: 0.5mm

Pins:

20/40/50/60/70/80/100

Types: SMT D/R

Mated Height:

1.5mm, 1.2mm

Applications





DSC

PDA

Mobile phone

Notebook

Various Handheld devices

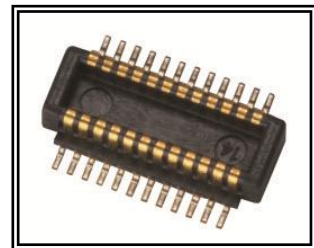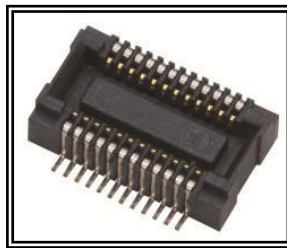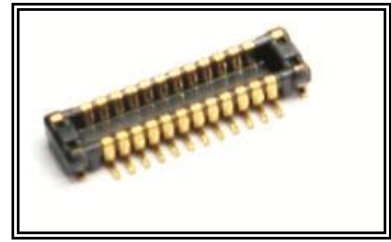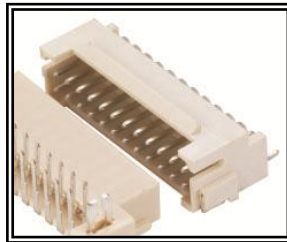

PalCONN, the Interconnect Division of Palpilot International, has developed a new series of Board to Board (BTB).

All the BTB connectors can be custom made based on specific customers design requirements, to achieve different configurations such as stacking heights.

The connectors have anti-tin wicking structure, extremely narrow design to reduce space for PCB, and superior solder peg to improve products soldering strength.

All connectors meet industry standard performance specs and are RoHS compliant.

Our BTB connectors can support your medical handheld device, cellphone, tablet, e-book, and laptop.



www.palconnusa.com