




PALNOVA

Through-hole Unshielded Filter Inductors

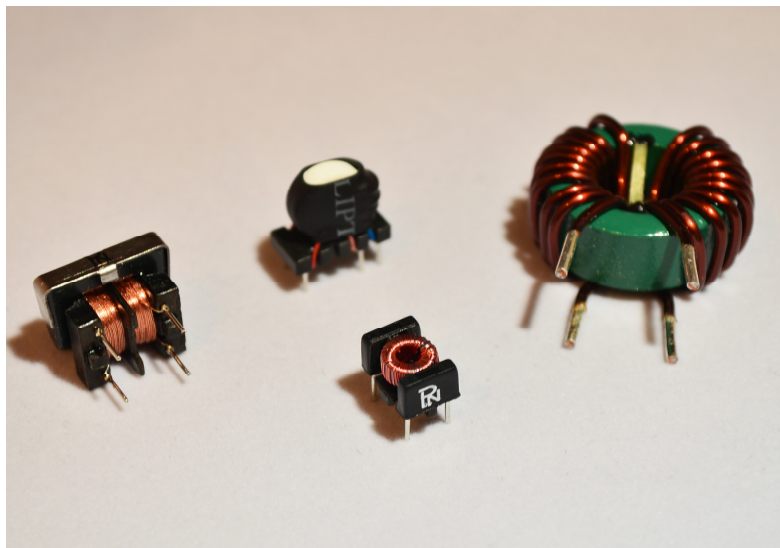

Applications

Power Supply Filter
Signal Filtering
Noise Filtering
Energy Storage
Notebook Computer
Handheld Devices

Features

Low DCR
Low-loss Ferrite
Wave solderable
RoHS compliant
Pick and Place Mtn.
Through-hole
Self-Leaded Design

Technical Specs

Operating Temps
-40°C to +100°C
UL94V-0 materials
Frequency range
20kHz to 5.0MHz

Through-hole Unshielded Drum Core Filter Inductors

PPK1010 Series-Through-hole Unshielded Filter with 1 or 2 windings

- 39 μ H to 1.0mH, Single winding
- 10 μ H to 33 μ H, Dual winding
- 10.50mm HT., 0.53A to 5.30A rated current

PPK0605 Series-Through-hole Unshielded Filter

- 22 μ H to 1.0mH, Single winding
- 5.50mm MAX HT., 0.13A to 0.90A rated current.

All PalNova Inductors are design and manufactured to meet industry standard performance specifications and are RoHS compliant.

For standard product details, please refer to online data sheets, or contact PalNova.

PALNOVA

www.palnova.com

3000 Kenneth Street, Santa Clara, CA 95054
Phone: 408-855-8866 Fax: 408-855-8868

15991 Red Hill Ave., Suite 102, Tustin, CA 92780
Phone: 714-460-0718 Fax: 714-460-0728