



BHY3000 HYBRID COUPLER

Features:

- Small Size
- Custom Designs Available
- Surface Mounted
- Low Cost
- Available on Tape and Reel



Outline Drawing

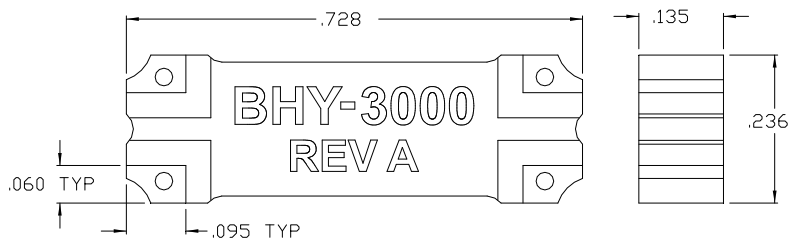

All dimensions in inches



Electrical Specifications:

Frequency Range: 2000 to 4000 MHz

Insertion Loss: 0.15 dB max.

Amplitude Balance: +/- 1.0 dB

Phase Balance: 2 degrees

VSWR: 1.2:1

Power Handling: 200 Watts CW

Isolation: 20 dB min.

Mechanical Specifications:

Dimensions: 0.728" x 0.236" x 0.135"

Mounting: Surface

Environmental Specifications:

Operating Temperature: -55°C to +90°C

