

# LIPS® P118 SHORT STROKE SLIM-LINE LINEAR POSITION SENSOR

Position feedback for industrial and scientific applications

- Non-contacting inductive technology to eliminate wear
- Travel set to customer's requirement
- Compact 19 mm diameter body
- High durability and reliability
- High accuracy and stability
- Sealing to IP67



As a leading designer and manufacturer of linear, rotary, tilt and intrinsically safe position sensors, Positek® has the expertise to supply a sensor to suit a wide variety of applications.

Our P118 LIPS® (Linear Inductive Position Sensor) is an affordable, durable, accurate position sensor designed for a wide range of industrial applications. It is particularly suitable for OEMs seeking good sensor performance in situations where a small diameter, short-bodied sensor is needed and cost is important. The unit is compact and space-efficient, being responsive along almost its entire length, and like all Positek® sensors provides a linear output proportional to displacement. Each unit is supplied with the output calibrated to the travel required by the customer, from 2 to 50mm and with full EMC protection built in.

Overall performance, repeatability and stability are outstanding over a wide temperature range.

The sensor has a compact 19 mm diameter stainless steel body, is easy to install and set up. Mounting options include body clamps or a stainless steel mounting flange with two 3.2 mm by 30 degree wide slots on a 25 mm pitch. The stainless steel plunger can be supplied free or captive, with female M4 thread, or spring-loaded with a ball end. The P118 also offers a range of mechanical options, environmental sealing is to IP67.

## SPECIFICATION

### DIMENSIONS

For full mechanical details see drawing P118-11

**Independent linearity** < ± 0.25% @ 20°C

**Temperature coefficients** < ± 0.01%/°C Gain &  
< ± 0.01%FS/°C Offset

**Frequency response** > 10 kHz (-3dB)  
> 300 Hz (-3dB) 2 wire 4 to 20 mA

**Resolution** Infinite

**Noise** < 0.02% FSO

### Environmental Temperature Limits

**Operating** -40 to +125°C standard

-20 to +85°C buffered

**Storage** -40 to +125°C

**Sealing** IP65/IP67 depending on connector / cable option

**EMC Performance** EN 61000-6-2, EN 61000-6-3

**Vibration** IEC 68-2-6: 10g

**Shock** IEC 68-2-29: 40 g

**MTBF** 350,000 hrs 40°C Gf

### Drawing List

P118-11 Sensor Outline

Drawings, in AutoCAD® dwg or dxf format, available on request.

Do you need a position sensor made to order to suit a particular installation requirement or specification? We'll be happy to modify any of our designs to suit your needs - please contact us with your requirements.

For further information please contact:

[www.positek.com](http://www.positek.com) [sales@positek.com](mailto:sales@positek.com)

Tel: +44(0)1242 820027 fax: +44(0)1242 820615

Positek Ltd, Andoversford Industrial Estate, Cheltenham GL54 4LB U.K.

# LIPS® P118 SHORT STROKE SLIM-LINE LINEAR POSITION SENSOR

Position feedback for industrial and scientific applications

## How Positek's PIPS® technology eliminates wear for longer life


Positek's PIPS® technology (Positek Inductive Position Sensor) is a major advance in displacement sensor design. PIPS®-based displacement transducers have the simplicity of a potentiometer with the life of an LVDT/RVDT.

PIPS® technology combines the best in fundamental inductive principles with advanced micro-electronic integrated circuit technology. A PIPS® sensor, based on simple inductive coils using Positek's ASIC control technology, directly measures absolute position giving a DC analogue output signal. Because there is no contact between moving electrical components, reliability is high and wear is eliminated for an exceptionally long life.

PIPS® overcomes the drawbacks of LVDT technology – bulky coils, poor length-to-stroke ratio and the need for special magnetic materials. It requires no separate signal conditioning.

Our LIPS® range are linear sensors, while RIPS® are rotary units and TIPS® are for detecting tilt position. Ask us for a full technical explanation of PIPS® technology.

We also offer a range of ATEX-qualified intrinsically-safe sensors.

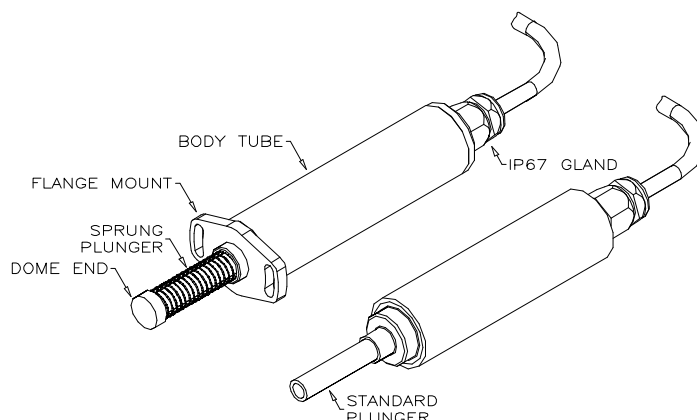

## TABLE OF OPTIONS

**MEASUREMENT RANGE:** Factory-set to any length from 2 to 50 mm in increments of 1mm.

### ELECTRICAL INTERFACE OPTIONS:

OUTPUT SIGNAL	SUPPLY INPUT	OUTPUT LOAD
Standard:		
0.5-4.5V dc ratiometric	+5V dc nom. $\pm$ 0.5V.	5k $\Omega$ min.
Buffered:		
0.5-4.5V dc	+24V dc nom. + 9-28V.	5k $\Omega$ min.
0.5-9.5V dc	+24V dc nom. + 13-28V.	5k $\Omega$ min.
Supply Current	10mA typical, 20mA maximum.	

### CONNECTOR/CABLE OPTIONS

Connector - M8 IEC 60947-5-2 IP67

Cable with M8 gland IP67

Cable length >50cm – please specify length in cm


### MOUNTING OPTIONS:

Flange, Body Tube Clamp.


**PUSH ROD OPTIONS:** – standard retained with M4x0.7 female thread

Sprung loaded (spring supplied loose), Dome end (sprung loaded) or Free.

Output Characteristic - Standard

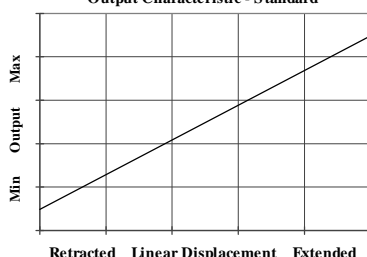

Output Characteristic - Reverse option

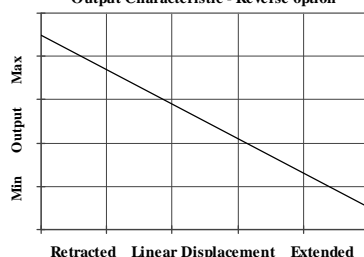

For further information please contact:

[www.positek.com](http://www.positek.com) [sales@positek.com](mailto:sales@positek.com)

Tel: +44(0)1242 820027 fax: +44(0)1242 820615

Positek Ltd, Andoversford Industrial Estate, Cheltenham GL54 4LB U.K.