


## 2DP-GSM-900 - Amplified Diplexer

### 2DP-GSM-900

This amplified diplexer offers +20 dB of gain and is suitable for outdoor applications. We are able to manufacture most any filter or diplexer you need, please contact the factors with your specifications.

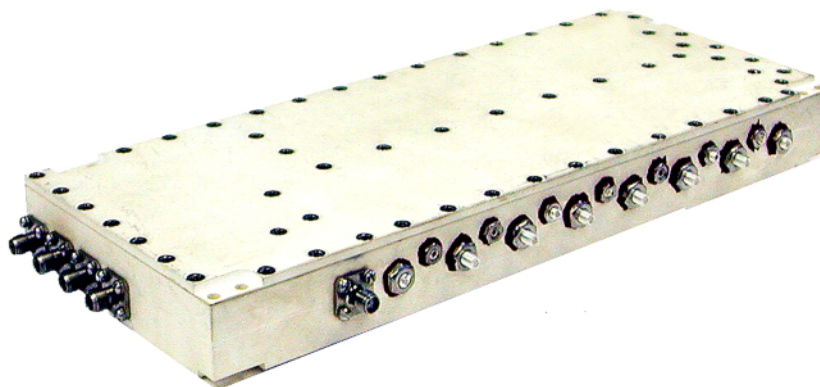

2DP-GSM-900

### Specifications

Rx Passband	890 – 915 MHz, minimum
Tx Passband	935 – 960 MHz, minimum
Insertion Loss	≤ 1.0 dB @ Passbands
Channel – to – Channel Isolation	≥ 75 dB
Ultimate Attenuation	≥ 60 dB up to 3500 MHz
VSWR	≤ 1.5:1 @ Passbands
Power	100 W
Amplified Output Gain	+20 dB
Connectors	SMA Female all ports



**Reactel, Incorporated - Reacting First to Your Filter Requirements**

8031 Cessna Avenue ▪ Gaithersburg, Maryland 20879

Phone: 301-519-3660 ▪ Fax: 301-519-2447 ▪ [reactel@reactel.com](mailto:reactel@reactel.com) ▪ [www.reactel.com](http://www.reactel.com)