

REEL TAPING SPECIFICATIONS FOR SURFACE MOUNT DEVICES - D2-PAK

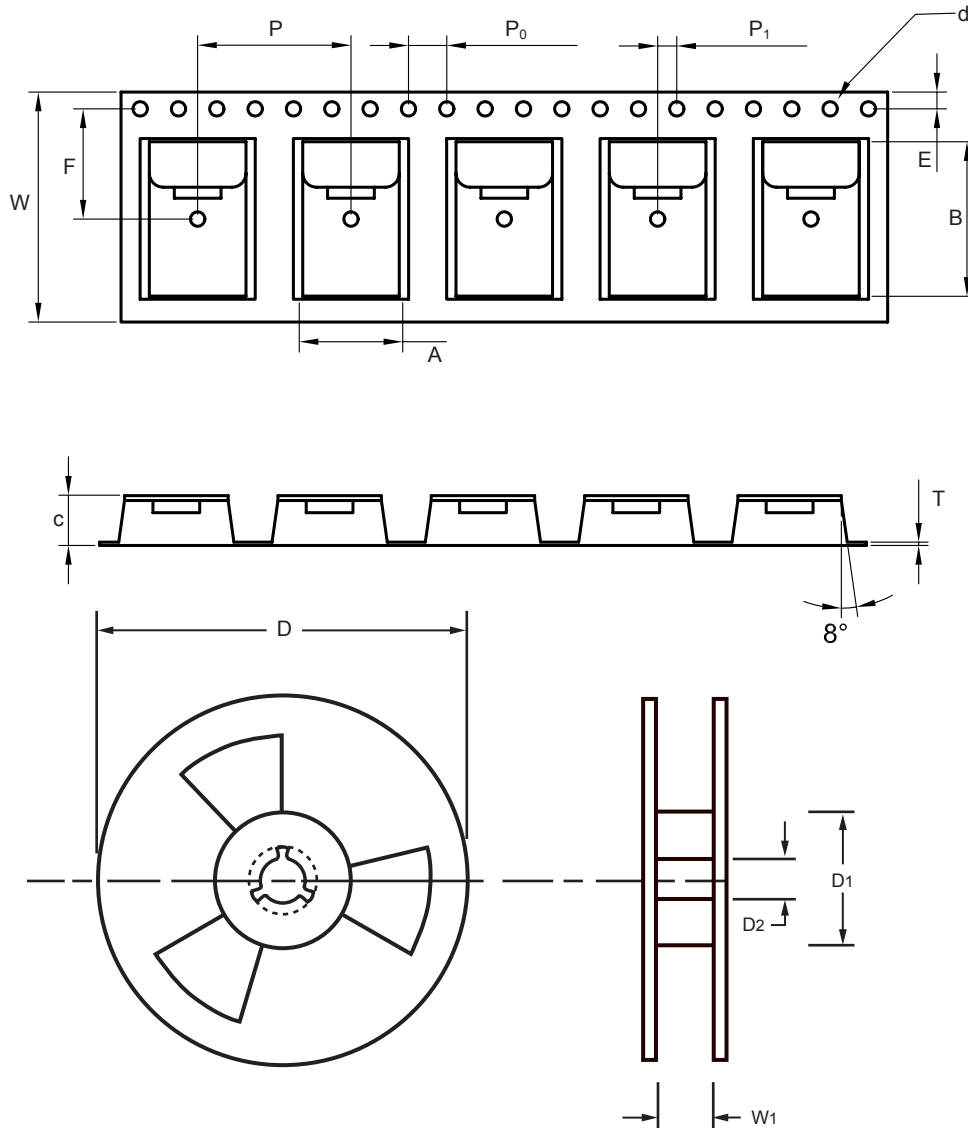


Fig.: Configuration of DIP REEL TAPING

ITEM	SYMBOL	SPECIFICATIONS (mm)	SPECIFICATIONS (inch)
Carrier width	A	10.8 ± 0.1	0.425 ± 0.004
Carrier length	B	16.13 ± 0.1	0.635 ± 0.004
Carrier depth	C	5.21 ± 0.1	0.205 ± 0.004
Sprocket hole	d	1.5 + 0.1/-0	0.059+0.004/-0
Reel outside diameter	D	329.5 ± 2.0	12.974 ± 0.079
Reel inner diameter	D1	104.95 ± 2.0	4.132 ± 0.079
Feed hole diameter	D2	13.11 ± 0.2	0.516 ± 0.008
Sprocket hole position	E	1.75 ± 0.1	0.069 ± 0.004
Punch hole position	F	11.5 ± 0.1	0.453 ± 0.004
Punch hole pitch	P	16.0 ± 0.1	0.630 ± 0.004
Sprocket hole pitch	P0	4.0 ± 0.1	0.156 ± 0.004
Embossment center	P1	2.0 ± 0.1	0.079 ± 0.004
Tape width	W	24.0+0.3/-0.1	0.945+0.012/-0.004
Reel width	W1	24.44 ± 1.0	0.962 ± 0.039
Tape thickness	T	0.356±0.013	0.014 ± 0.0005

Note : Devices are packed in accordance with EIA stand RS-481-A and specifications listed above. Available only for D2-PAK devices.