

AXIAL-LEAD TAPING SPECIFICATIONS FOR DEVICES-DO-41G/DO-35

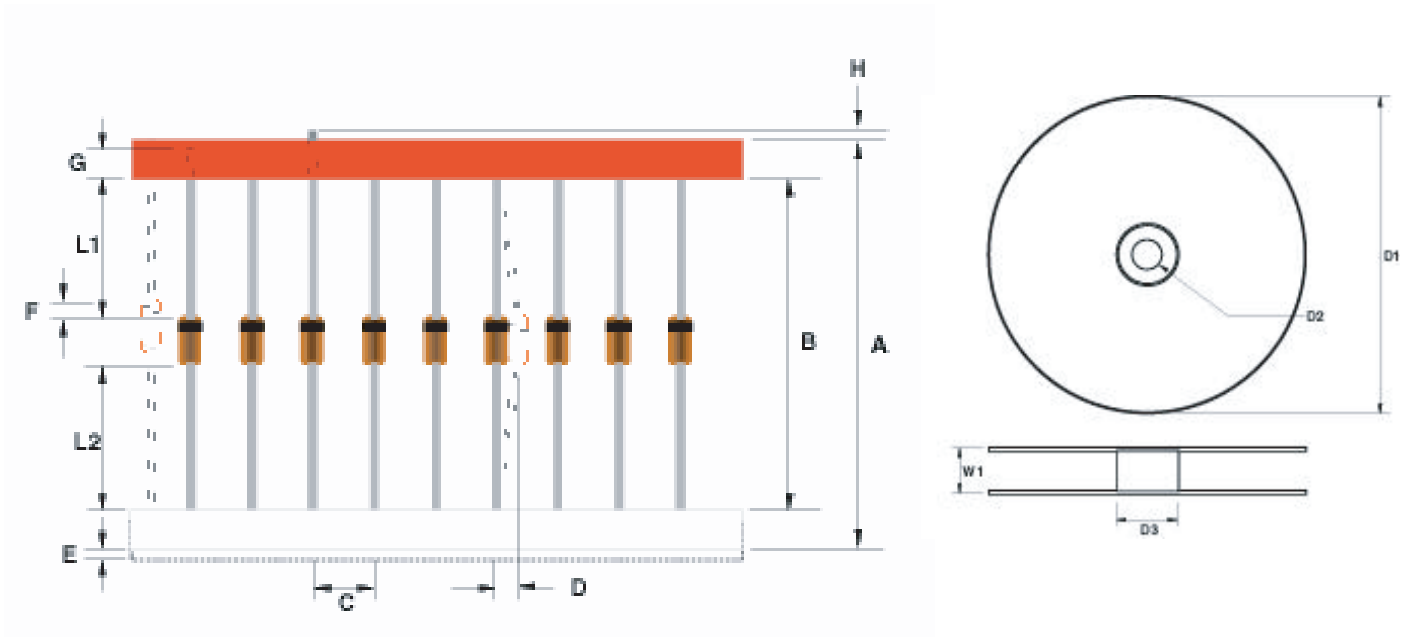


Fig.: Configuration of AXIAL-LEAD TAPING

ITEM	SYMBOL	SPECIFICATIONS (mm)	SPECIFICATIONS (inch)
Component Pitch	C	5.08 ± 0.4	0.200 ± 0.016
Untaped Lead	L1-L2	± 0.69	± 0.027
Glass Offset	F	± 0.69	± 0.027
Bent	D	1.2 Max.	0.047 Max.
Tape Mismatch	E	0.55 Max.	0.022 Max.
Taped Lead	G	3.2 Min.	0.126 Min.
Lead Beyond Tape	H	0	0
Reel outside diameter	D1	356	14.018
Feed hole diameter	D2	30	1.181
Reel inner diameter	D3	84	3.308
Tape Spacing	B	52 ± 0.69	2.048 ± 0.027
Tape width	W1	77.5	3.052

Notes: 1. Axial lead devices are packed in accordance with EIA standard RS-296-D and specifications given below.
2. Suffix "TB" after P/N for 52mm packing code.